

FEATURES AND SPECIFICATIONS



Features and Benefits

- MIL-C-39012 compatible
- 50 and 75Ω versions available
- Stability under vibration and shock

See BNC and TNC Specifications Table on Page R-2
For More Information

molex® RF Coaxial Connectors TNC Series

73178/73179/73219 Straight Cable Plug

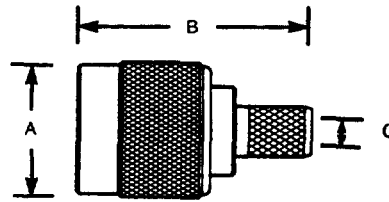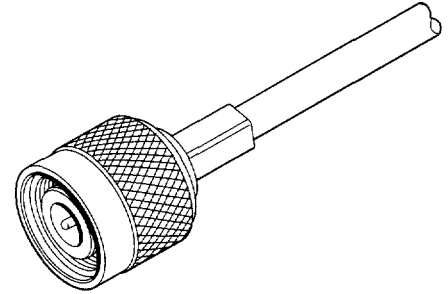

Crimp/Crimp

RF Coaxial Connectors

ORDERING INFORMATION AND DIMENSIONS

RG/U Cable	Order No.	Contact Plating	Termination Style Body/Contact	Dimension			Features	Dielectric Materials
				A	B	C		
58,141	73178-5001	Silver	Crimp/Crimp	14.50 (.571)	25.30 (.100)	3.20 (.125)	Captive Contact	Polypropylene
58,141	73219-0023	Gold	Crimp/Crimp	14.50 (.571)	25.30 (.100)	3.20 (.125)	Captive Contact	Polypropylene
59,62	73179-5001	Silver	Crimp/Crimp	14.50 (.571)	25.30 (.100)	3.90 (.153)	Captive Contact	Polypropylene
59,62	73219-0043	Gold	Crimp/Crimp	14.50 (.571)	25.30 (.100)	3.90 (.153)	75Ω Captive Contact	Polypropylene

R