
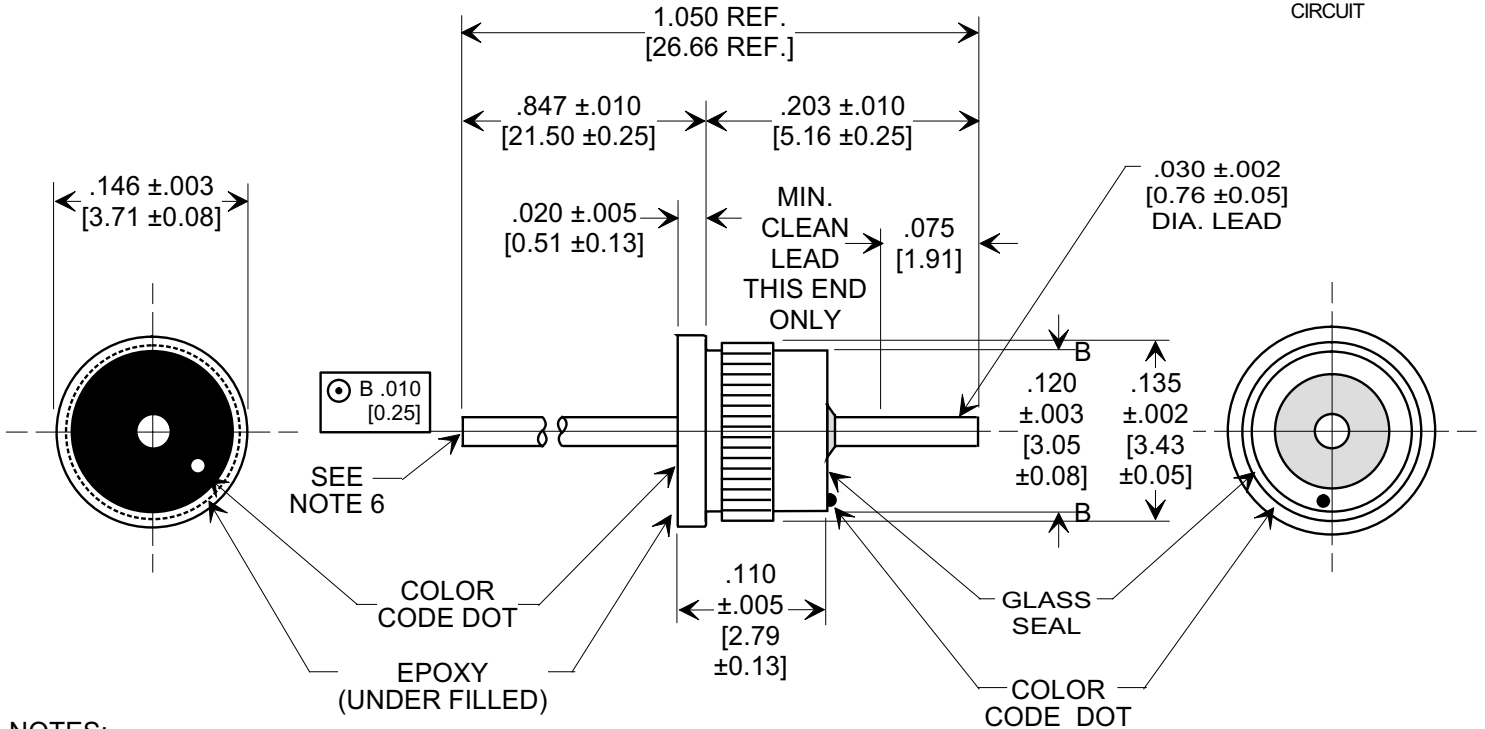



MARKETING SALES DRAWING
 DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
 DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



NOTES:

1. Operating temperature range: -55°C to +125°C.
2. Gold plated case and lead.
3. Epoxy sealed on opposite end from glass seal.
4. Proper installation requires firm, steady pressure until the flange is fully seated.
5. Recommended mounted hole: .128/.129 [3.25/3.28] dia.
6. End of lead indicated to be free of burrs.
7. Tusonix Standard part number: 4306-031.
 Tusonix ROHS compliant part number: 4306-031 LF.
 Customer must specify Standard or ROHS part number when ordering.
8. ROHS compliant part marked with additional green dot for identification.

Cx (pF)	TOL.	DC WORKING VOLTAGE		DC CURRENT (AMPS)	I.R. MIN.	D.W.V.	MIN. NO LOAD INSERTION LOSS (dB) @ 25° C PER MIL-STD-220					COLOR CODE
		85°C	125°C				1 MHz	10 MHz	100 MHz	1GHz	10 GHz	
2700	-0% +100%	150	100	5	10 G Ω	250 VDC	---	10	25	40	50	RED

REVISION RECORD Original Release C.O. WAS SK 8188-582 L.E. 02-15-05 20050214-1-02 NOTE 7 REVD & NOTE 9 DELETED L.E. 03-07-05 20050301-1-05	0	1	--TOLERANCES-- Unless Otherwise Specified DECIMAL ± ANGLES ±	Title <h3 align="center">PRESS-IN EMI FILTER</h3>	
	Drawn L.E. 01-12-05 Scale 7 X				
	Approved B.Mc. 01-12-05		<h2 align="center">TUSONIX</h2> TUCSON, ARIZONA	<h1 align="center">A</h1>	<h2 align="center">4306-031</h2>

X-2015 Rev-0