


DWG. NO.		SD360-574-0850H	
REV	DESCRIPTION	BY DATE	APPD
B	ECR 7733	JED 6/27/03	JEM

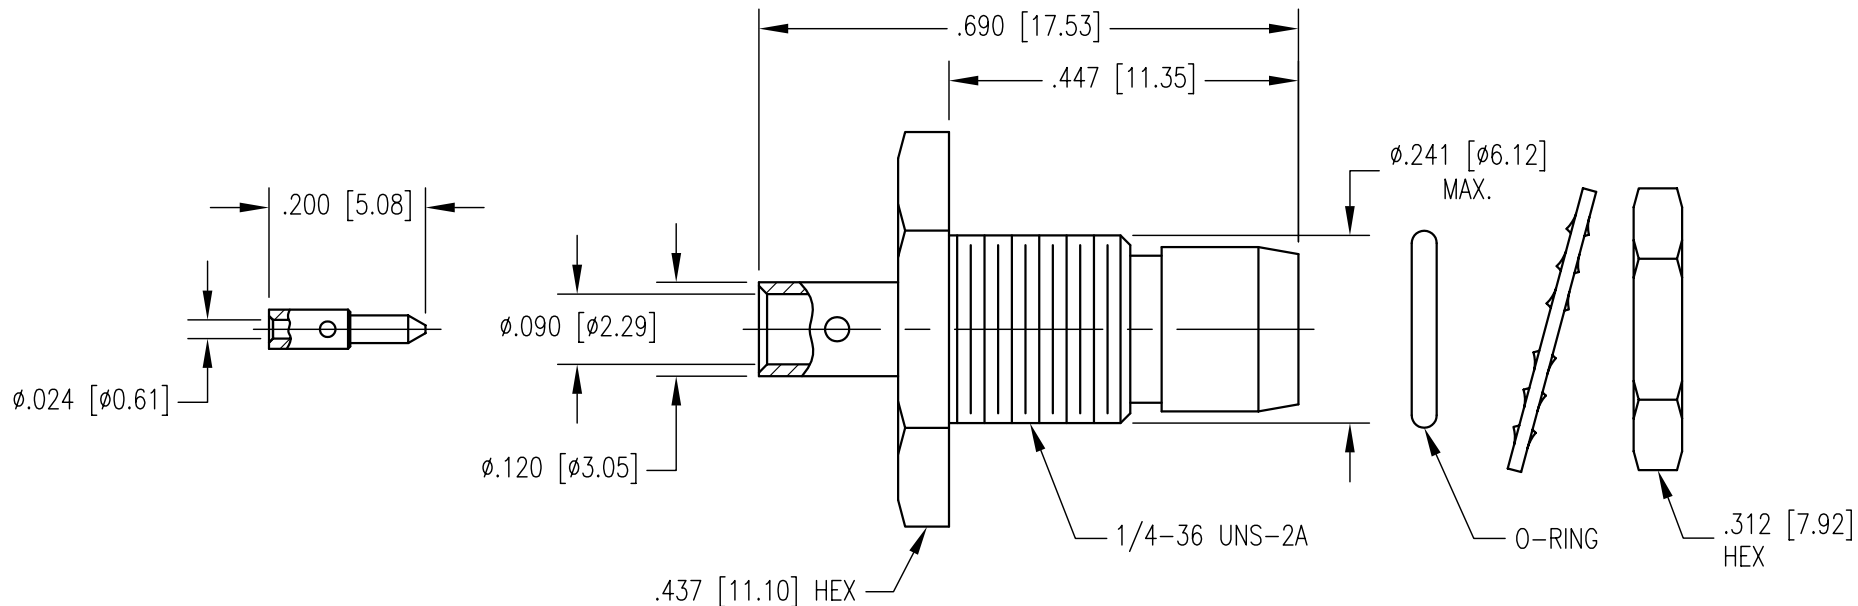

NOTES:

1. MATERIALS:

FRONT CONTACT: COPPER ALLOY
 LOCKWASHER: PHOSPHOR BRONZE PER ASTM B103
 ALL OTHER METAL PARTS: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710
 O-RING: SILICONE RUBBER PER ZZ-R-765

2. FINISH:

CENTER CONTACTS: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 NUT AND LOCKWASHER: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH .085 DIA. SEMI-RIGID CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 5-24 WITH TRIMMING DIMENSIONS SHOWN.

RECOMMENDED MOUNTING HOLE

CABLE TRIMMING DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		NORTHROP GRUMMAN	
TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2°		Winchester Electronics 62 Barnes Industrial Road North Wallingford, CT 06492	
CUSTOMER DRAWING		TITLE BMA STRAIGHT BULKHEAD PLUG	
DRAWN JED	DATE 10/22/01	CHECKED JWH	DATE 10/23/01
APPROVED JEM	DATE 10/23/01	APPROVED KJT	DATE 10/23/01
A		SD360-574-0850H	SHT. 1 OF 1 REV. B