

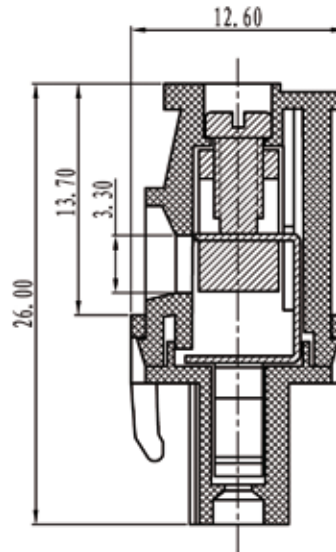


# euro-block

product specification

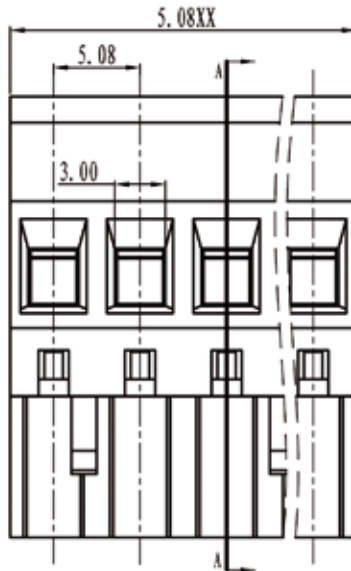

SECTION A-A

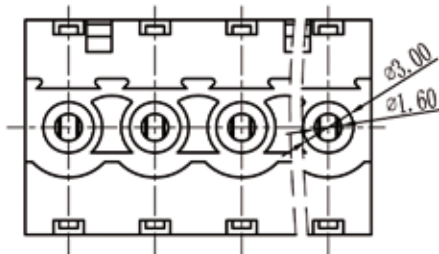

TOLERANCES EXCEPT AS NOTED

## Electrical

Standard: UL-IEC  
 Rated voltage: 300V-320V  
 Rated current: 15A-10A  
 Contact resistance: 20m Ω  
 Wire range: 28-12AWG-2.5mm<sup>2</sup>  
 Withstanding voltage: AC2000V/1Min  
 Insulation resistance: 5000M Ω/DC1000V

## Mechanical

Torque: 0.5Nm (4.5Lb'in)  
 Temp.Range: -40°C~+105°C  
 Strip length: 7-8mm

## Dimensions

Pitch: 5.08mm  
 Poles: 2p-24p

## Material

Housing: PA66, UL94V-0  
 Screws: M3, steel Zinc plated  
 Wire guard: Phosphor bronze, Ni plated  
 Clamp: Brass, Ni plated

	linear dimension				fillet	chamfer	short angle sid			≡	-	□	//	⊥			
	variable range	over 6	over 30	over 120	over 480	all	over 6	over 10	over 50						over 120	all	over 5
to 6	to 30	to 120	to 480	to 480	to 6	to 10	to 50	to 120	to 10'	to 30'	to 10'	to 5	to 30	to 120			
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
					NAME	CRV-5.08-R