



REL-MR- 4,5DC/21

Order No.: 2961367

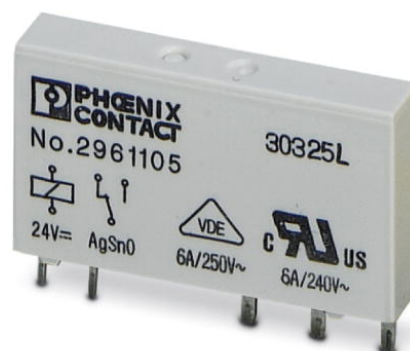

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961367>

Pluggable miniature relay, with power contact, 1 PDT, input voltage 4.5 V DC

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) | 4  017918 730840 |
| sales group | G084 |
| Pack | 10 pcs. |
| Customs tariff | 85364900 |
| Catalog page information | Page 92 (IF-2009) |

Product notes

WEEE/RoHS-compliant since:
05/09/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Coil side

| | |
|---|------------------------|
| Nominal input voltage U_N | 4.5 V DC |
| Input voltage range in reference to U_N | (refer to the diagram) |
| Nominal input current at U_{IN} | 38 mA |
| Typical response time | 5 ms |

| | |
|----------------------|-----------------------------------|
| Typical release time | 2.5 ms |
| Coil resistance | 119 Ω \pm 10 % (at 20°C) |

Contact side

| | |
|---------------------------------------|--|
| Contact type | Single contact, 1-PDT |
| Contact material | AgSnO |
| Maximum switching voltage | 250 V AC/DC |
| Minimum switching voltage | 5 V (at 100 mA) |
| Maximum inrush current | (on request) |
| Min. switching current | 10 mA (at 12 V) |
| Limiting continuous current | 6 A |
| Interrupting rating (ohmic load) max. | 140 W (at 24 V DC) 20 W (for 48 V DC) 18 W (for 60 V DC) 23 W (for 110 V DC) 40 W (for 220 V DC) 1500 VA (for 250 V AC) |

General data

| | |
|--|------------------------------------|
| Width | 5 mm |
| Height | 28 mm |
| Depth | 15 mm |
| Test voltage relay winding/relay contact | 4 kV AC (50 Hz, 1 min.) |
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Operating mode | 100% operating factor |
| Mechanical service life | 2 x 10 ⁷ cycles |
| Standards/regulations | IEC 60664 EN 50178 IEC 62103 |
| Pollution degree | 3 |
| Surge voltage category | III |
| Mounting position | Any |
| Assembly instructions | In rows with zero spacing |

Connection data

| | |
|--------------------|--------------------------|
| Type of connection | Plug / solder connection |
|--------------------|--------------------------|

Certificates / Approvals



Certification


CUL, GL, GOST, UL, VDE-PZI, VDE-PZI

Additional products

| Item | Designation | Description |
|----------------|---------------------|--|
| General | | |
| 2980241 | PLC-BSC- 5DC/ 1/ACT | 6.2 mm PLC actuator basic terminal blocks with screw connection method, input voltage 5 V DC(without relay or optocoupler) |
| 2980225 | PLC-BSC- 5DC/21 | 6.2 mm PLC basic terminal blocks with screw connection method, input voltage 5 V DC(without relay or optocoupler) |
| 2980254 | PLC-BSP- 5DC/ 1/ACT | 6.2 mm PLC PLC actuator basic terminal blocks with spring-cage connection method, input voltage 5 V DC(without relay or optocoupler) |
| 2980238 | PLC-BSP- 5DC/21 | 6.2 mm PLC basic terminal blocks with spring-cage connection method, input voltage 5 V DC(without relay or optocoupler) |


Diagrams/Drawings

Drilling plan/solder pad geometry

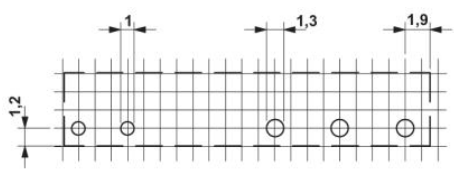


a = pitch division 1.25 mm and 1.27 mm


Diagram

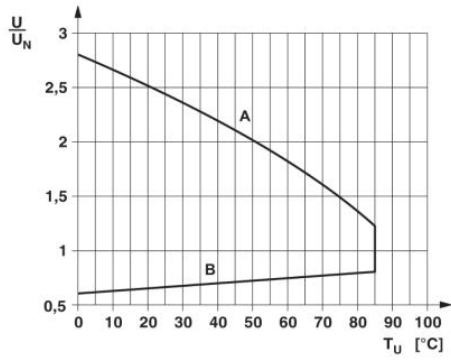

Dimensioned drawing

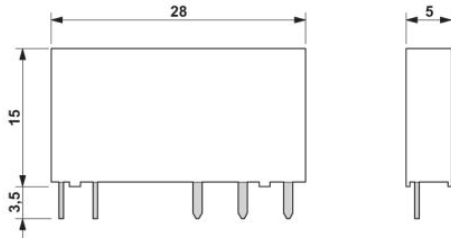

Circuit diagram

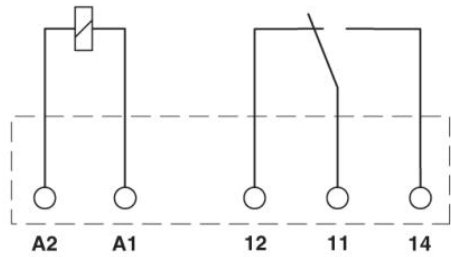

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;