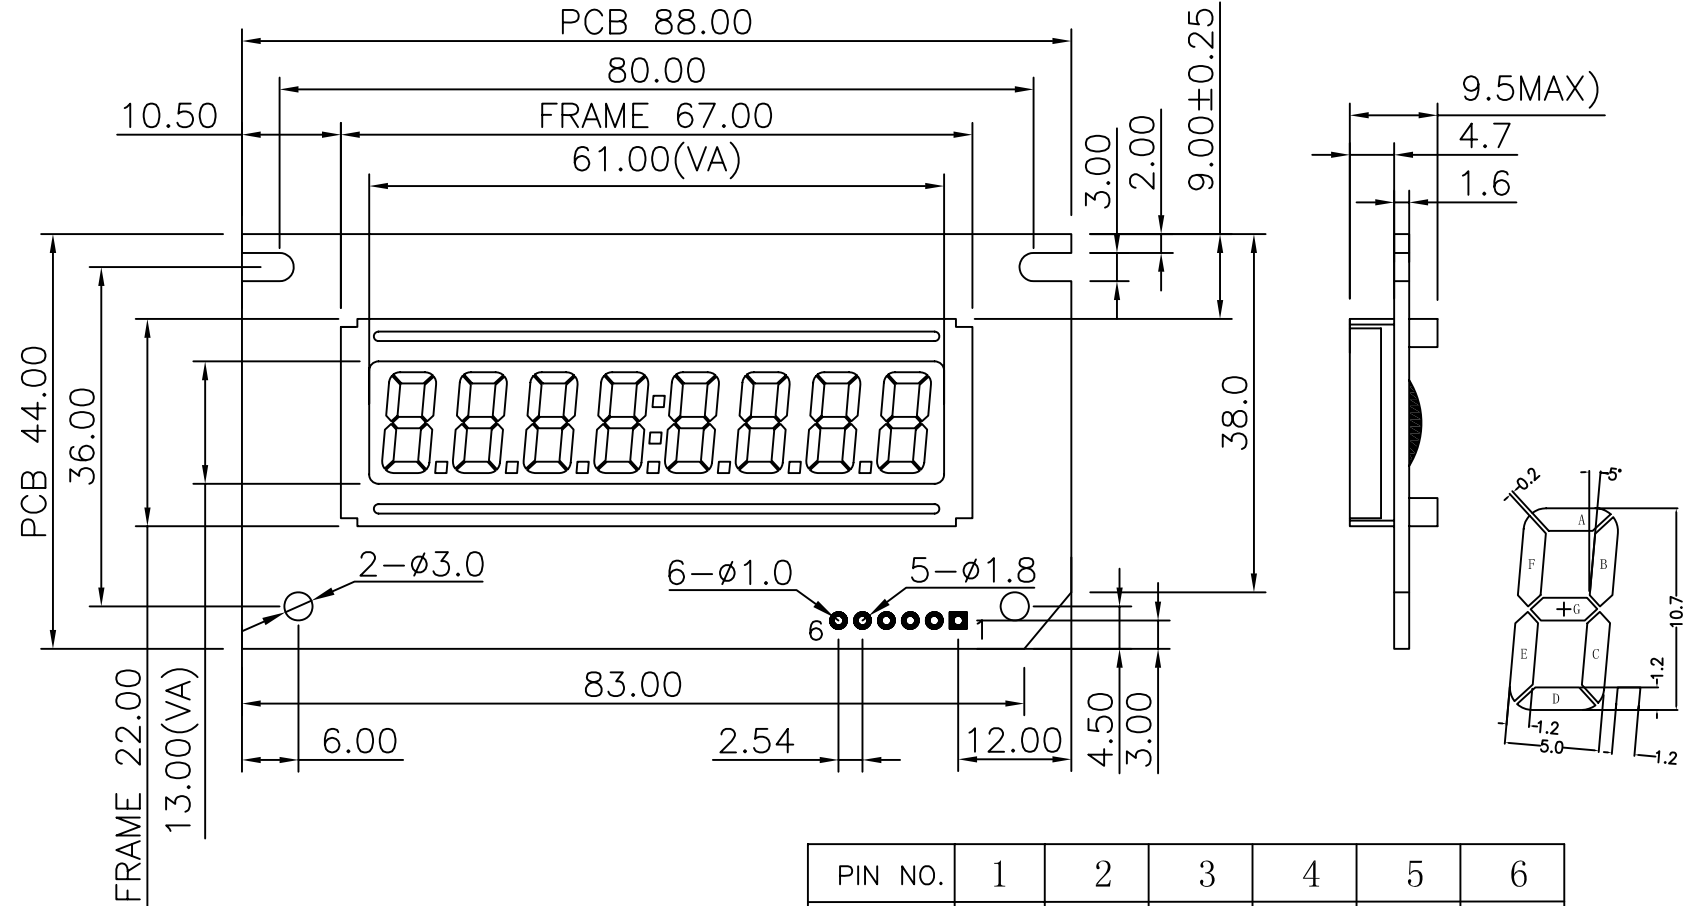




REV.	CHANGE CONTENT	BY	DATE



PIN NO.	1	2	3	4	5	6
SYMBOL	DATA	+5V	+5V	CLK	GND	GND

- NOTES:
1. DISPLAY TYPE: TN
 2. DISPLAY MODE: REFLECTIVE/POSITIVE
 3. VIEWING DIRECION: 6 O'CLOCK
 4. VDD: 5.0 V
 5. OPERATING TEMP: -20°C TO 70°C
STORAGE TEMP: -30°C TO 80°C
 6. DRIVER IC:S6A0065B01-COCX Or Equ.
 7. DRIVER METHOD: STATIC
 8. BACK LIGHT:NONE

TOLERANCE		 HTDISPLAY CO., LTD.				DRAWING No.: HS0002C-NR62N-VA	
>0~6	±0.10					DRAWING TITLE: LCM DRAWING	
>6~80	±0.20	FILE NO.: 8					
>80~240	±0.30	DESIGN	JHG	20061013	STANDARD	REV. : A	SCALE : -
>240~400	±0.50	CHECKED			TECHNOLOGY	PROJECTION:	UNIT :mm
// ⊥ ◎ ±0.10		APPROVED			Q.A		SHEET : 1/1