



# HVRL300

## 30kV 30mA HIGH VOLTAGE DIODE

**HVRL** is high reliability resin molded type high voltage diode in small size package which is sealed a multilayed mesa type silicon chip by epoxy resin.

### ■ Features

- High speed switching
- Low VF
- High surge resistivity for CRT discharge
- High reliability design
- Ultra small pakage


### ■ Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power

### ■ Maximum Ratings and Characteristics

- Absolute Maximum Ratings

### ■ Outline Drawings : mm

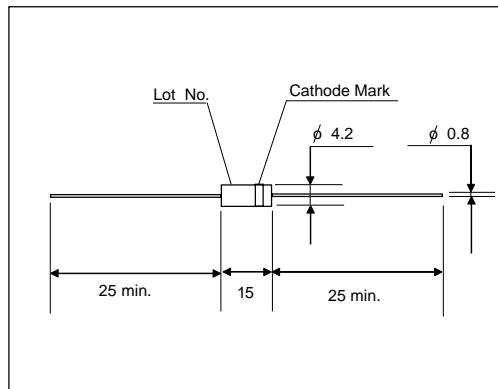

### ■ Cathode Mark

Type	Mark
HVRL300	

Items	Symbols	Condition	HVRL300	Units
Repetitive Peak Renerse Voltage	V <sub>RRM</sub>		30	kV
Average Output Current	I <sub>o</sub>	T <sub>a</sub> =25°C, Resistive Load	30	mA
Suege Current	I <sub>FSM</sub>	10mS Sine-half wave peak value	5.0	A <sub>peak</sub>
Junction Temperature	T <sub>j</sub>		155	°C
Allowable Operation Case Temperature	T <sub>c</sub>		125	°C
Storage Temperature	T <sub>stg</sub>		-40 to +155	°C

- Electrical Characteristics (T<sub>a</sub>=25°C Unless otherwise specified )

Items	Symbols	Conditions	HVRL300	Units
Maximum Forward Voltage Drop	V <sub>F</sub>	at 25°C, I <sub>F</sub> =I <sub>F(AV)</sub>	45	V
Maximum Reverse Current	I <sub>R1</sub>	at 25°C, V <sub>R</sub> =30kV	2.0	μA
	I <sub>R2</sub>	at 100°C, V <sub>R</sub> =30kV	20	μA
Maximum Reverse Recovery Time	T <sub>rr</sub>	at 25°C, I <sub>f</sub> =2mA, I <sub>R</sub> =4mA	100	nS
Junction Capacitance	C <sub>j</sub>	at 25°C, V <sub>R</sub> =0V, f=1MHz	1.0	pF