

# 3QL150AK Thru 3QL150AS

## 1. 外型尺寸 Feature & Dimension

### Features



- | Package with screw terminals
- | Isolation voltage 3000 V~
- | Glass passivated chips
- | Blocking voltage up to 1600 V
- | Low forward voltage drop
- | UL registered E231047

### Applications

- | Supplies for DC power equipment
- | Input rectifiers for PWM inverter
- | Battery DC power supplies
- | Field supply for DC motors

### Advantages

- | Easy to mount with two screws
- | Space and weight savings
- | Improved temperature and power cycling

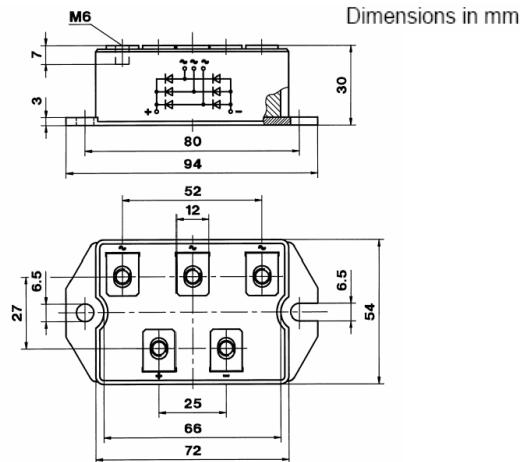

## 2. 产品性能 Product Characteristic

### ELECTRICAL AND THERMAL CHARACTERISTICS

TC=25°C unless otherwise specified

Item	Symbol	3QL150AK	3QL150AO	3QL150AQ	3QL150AS	Unit
Maximum repetitive voltage	VRM	800	1200	1400	1600	V
Maximum RMS Voltage	VRMS	560	840	980	1120	V
Maximum DC Blocking Voltage	VDC	800	1200	1400	1600	V
Peak Reverse Current (per leg) @Tj = 25°C At Rated DC Blocking Voltage @Tj = 150°C	IR	$\leq 10$				uA
		$\leq 20$				mA
Average rectified forward current 60Hz sine wave,R-load with heatsink Tc=100°C	Io	150				A
TJ=45°C VR=0 t=10ms (50Hz),sine t=8.3ms(60Hz),sine TJ=150°C VR=0 t=10ms (50Hz),sine t=8.3ms(60Hz),sine	Ifsm	1500 1700 1350 1500				A
TJ=45°C VR=0 t=10ms (50Hz),sine t=8.3ms(60Hz),sine TJ=150°C VR=0 t=10ms (50Hz),sine t=8.3ms(60Hz),sine	I <sup>2</sup> t	11250 14450 9100 11250				A <sup>2</sup> s

## 3QL150AK Thru 3QL150AS

<b>Storage temperature</b>	Tstg	-40 to +150	°C
<b>50/60Hz RMS t=1 min IISOL≤1mA t=1 s</b>	VISOL	2500 3000	V~
<b>Mounting torque(M5) Terminal connection torque(M5)</b>	Md	(Recommended Value 1.5~2.5) 5±15%	N·m
<b>typical</b>	Weight	270	g
<b>I<sub>F</sub>=200A T<sub>J</sub>=25°C</b>	V <sub>F</sub>	1.3	V
<b>For power-loss calculations only</b>	V <sub>T0</sub>	0.8	V
<b>per diode DC current Per module</b>	R <sub>thJC</sub>	0.6 0.1	k/w k/w
<b>per diode DC current(typ.) per module(typ.)</b>	R <sub>thcs</sub>	0.18 0.03	k/w k/w
<b>Creeping distance on surface</b>	dS	10	mm
<b>Creeping distance in air</b>	dA	9.4	mm
<b>Max. allowable acceleration</b>	a	50	m/s <sup>2</sup>

# 3QL150AK Thru 3QL150AS

### 3. 特性曲线Characteristic Curve

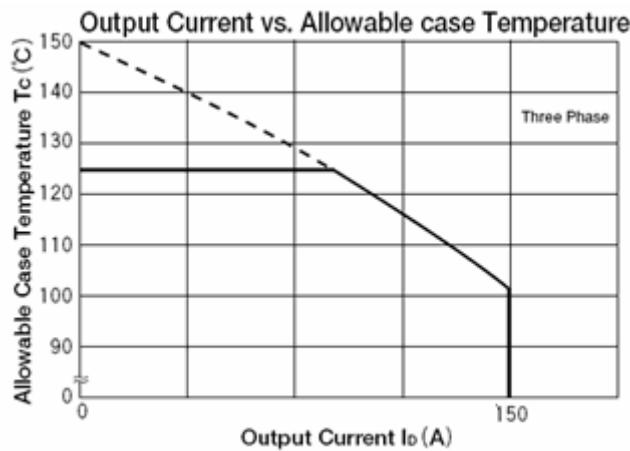


Fig.1. Power dissipation vs. output current F

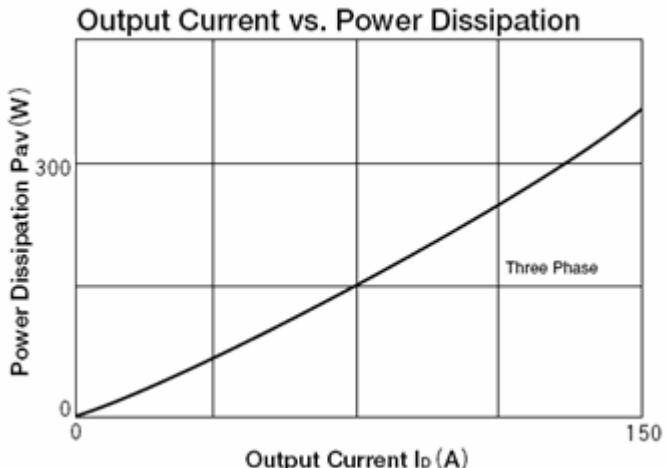


Fig.2. Power dissipation vs. Power Dissipation

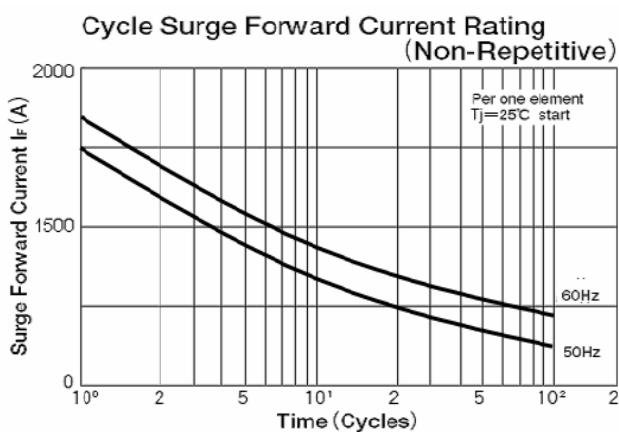


Fig.3. Surge overload characteristics vs. time

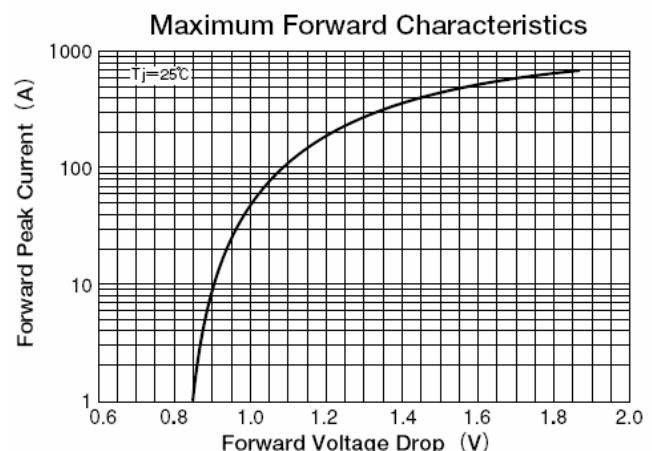


Fig.4. Forward characteristics of a diode arm


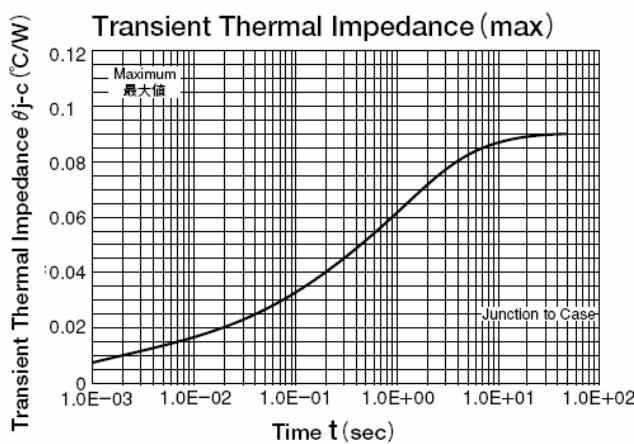


Fig.5. Transient thermal impedance vs. time

# 3QL150AK Thru 3QL150AS

## 4. 印字规范 Marking Identification

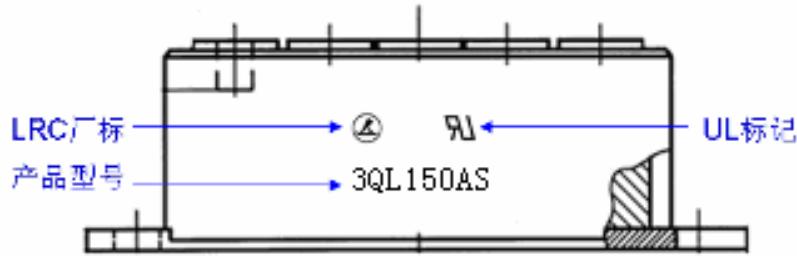

Note:

型号: 3 QL 150 AS

Bridge reverse voltage=1600V  
Average rectified forward Current=150A  
mean: QL series bridge  
mean: Three phase bridge