
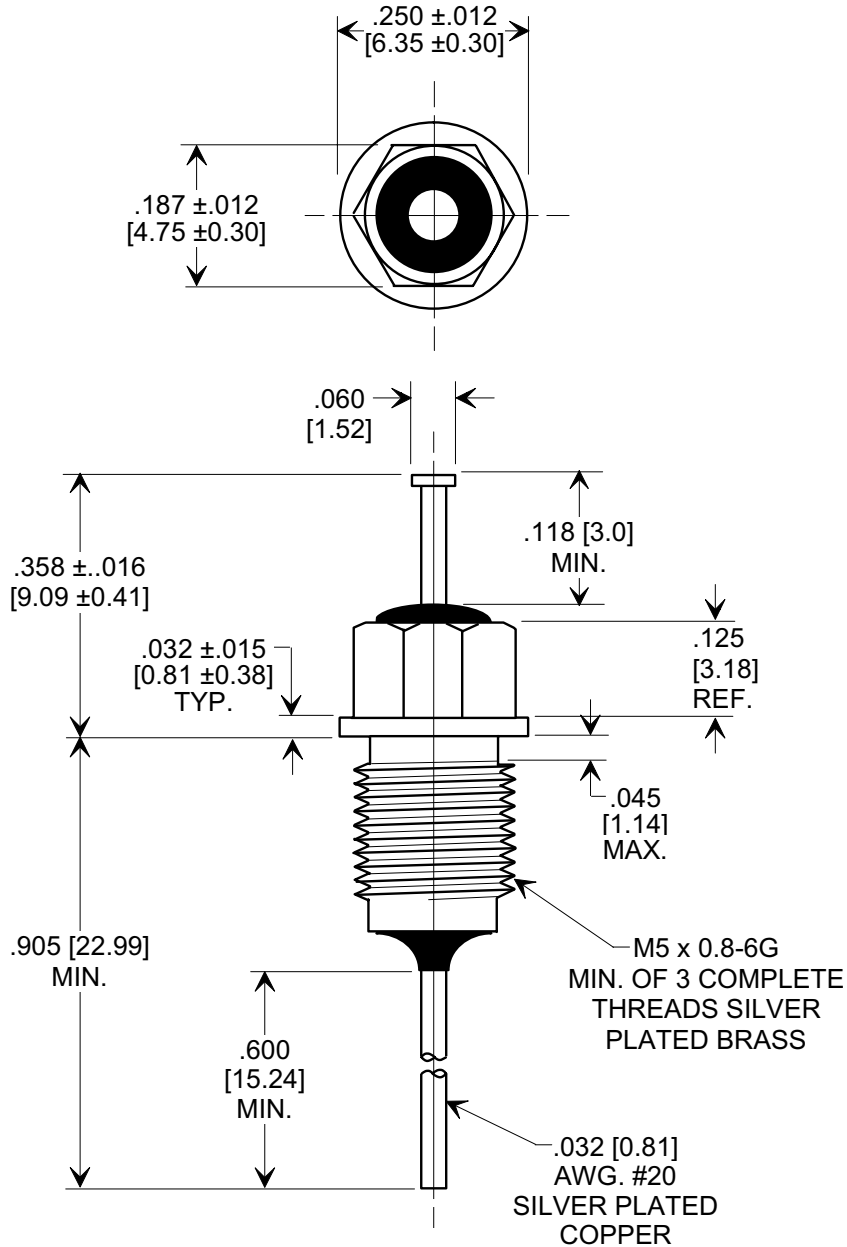



MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



NOTE:
MOUNTING TORQUE - RECOMMENDED - 3.5 lb-in [.395 N-m]

1200/ 3000	350 V	200 V	10 A	10 G Ω	100 VDC	45	—	45
	+85°C	+125 °C				200 MHz	1 GHz	2 GHz
CAP. (pF) +25°C 1 KHz	WORKING VOLTAGE (WVdc)		CURRENT	IR (MIN.) @ 100 VDC	DWV	MINIMUM NO LOAD INSERTION LOSS (dB) @ +25°C PER MIL-STD -220		

X-2015 Rev-0	REVISION RECORD	0	Original Release	4668	TUSONIX TUCSON, ARIZONA	Title PI TYPE LOW PASS BUSHING FILTER		
		2	COMPLETELY REVISED & REDRAWN. L.E. 08-26-87			Drawn	S.M. 05-23-02	Scale 4 X
		3	WAS SK 6834-000S. EC 10-15-87			Approved	J.Mc. 05-23-02	
		3555	ADDED NOTES & CHG. TOL AWG. EC 10-28-87			A		
		4	3586	RDN TO COMP FMT. S.M. 05-23-02				
		5	20020604-3-01		-- TOLERANCES -- Unless Otherwise Specified	4209-700		
					2 Place Decimal ±			
					3 Place Decimal ±	NOTED		
					Angles ±			