
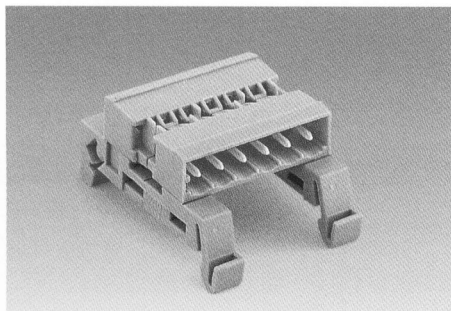


28

50 V ① | 300 V, 15 A
12 A | 300 V, 15 A 


*



Headers must not be energized in unmated condition.

Accessories

Dimensions (in mm)

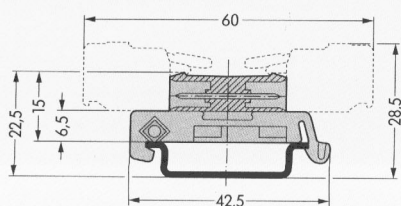

Note: These connectors can only be mated and unmated at voltages below 42 V and in the "No load" condition.

* For further approvals with corresponding ratings see pages 10.3 ff.