


ORWH-SS-109DM,N000 Product Details



ORWH-SS-109DM,N000
(1461180-4)

TE Internal Number: 1461180-4

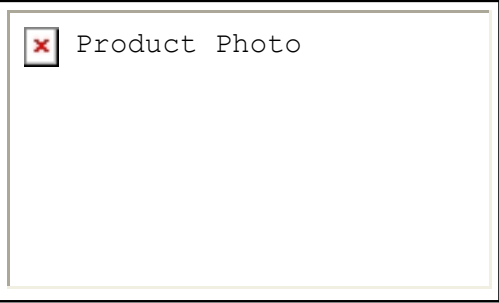

Obsolete

[Contact Product Information Center](#)

Industrial Relays (General Purpose)

[Always EU RoHS compliant but not ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ORWH Series
- Contact Arrangement = 1 Form A, SPST-NO, 1 N/O
- Contact Current Rating = 10 Amps.
- Monostable Coil Magnetic System
- Without Coil Suppression Diode

[View all Features](#)

Quick Links

[Check Pricing & Availability](#)
[Search for Tooling](#)
[Product Feature Selector](#)
[Contact Us About This Product](#)

Documentation & Additional Information	
Product Drawings: - None Available Catalog Pages/Data Sheets: - None Available Product Specifications: - None Available Application Specifications: - None Available Instruction Sheets: - None Available CAD Files: - None Available	Additional Information: Product Line Information Additional Product Images: Wiring Diagram Related Products: Tooling

Product Features (Please use the Product Drawing for all design activity)	
Product Type Features: Termination Type = Through Hole Electrical Characteristics: Contact Current Rating (Amps.) = 10 Coil Resistance (?) = 225 Coil Power, Nominal (mW) = 360 Actuating System = DC Input Voltage (VDC) = 9 - Coil Rating = Standard Body Related Features: Series = ORWH Contact Related Features: Mounting Options = PC Board, Socket Enclosure = Flux-Tight - FCC Part 68 Isolation = No - Relay Type = General Contact Base Material = Silver-cadmium oxide alloy - Approx. Dimensions (L x W x H) (mm [in]) = 19.05 x 15.50 x 15.25 [.750 x .610 x .600] - Approved Standards = UL Listed, TUV Approved	Configuration Related Features: Contact Arrangement = 1 Form A, SPST-NO, 1 N/O Coil Magnetic System = Monostable Coil Suppression Diode = Without Coil Selection Criteria = Nominal Voltage - Coil Latching = Without - Status Indicator = None Industry Standards: RoHS/ELV Compliance = RoHS/Not ELV Compliant Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C - RoHS/ELV Compliance History = Always was RoHS not ELV compliant Other: - Brand = OEG