

# ADAPTERS, IN-SERIES

BNC (75 Ohms), DC - 3 GHz

## SPECIFICATIONS:

Models: 5087, 5089, 5088

**RoHS**  
Compliant

### Electrical:

Frequency Range \_\_\_\_\_ DC – 3.0 GHz  
VSWR \_\_\_\_\_ 1.30:1 Max.  
Impedance \_\_\_\_\_ 75 Ohms  
Operating Temp Range \_\_\_\_\_ -65°C to +125°C

### Mechanical:


\*Connectors \_\_\_\_\_ Nickel Plated Brass  
Conductors \_\_\_\_\_ Gold Plated Beryllium Copper

\*75 Ohm BNC Connectors Mate Only with Other 75 Ohm BNC Series. Mating with 50 Ohm BNC Connectors may cause Damage.

**AEROFLEX**  
A passion for performance.


Model Number: **5087**

Male/Female Connectors

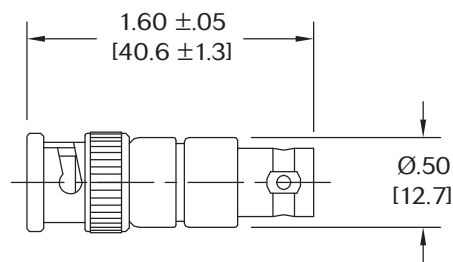


Model Number: **5089**

Male/Male Connectors

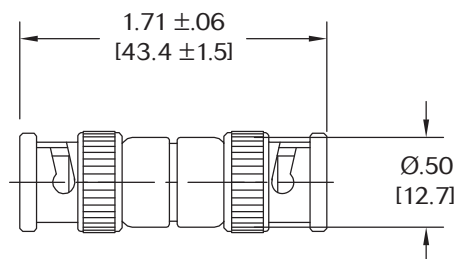

Model Number: **5088**

Female/Female Connectors

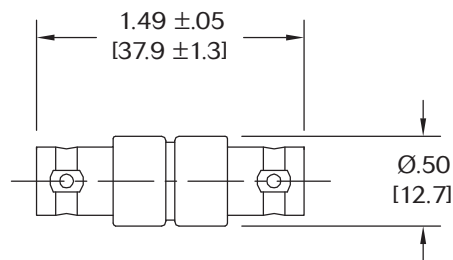

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.  
Design specifications are subject to change without notice.  
Contact factory for technical specifications before purchasing or use.

5087. REV A

**AEROFLEX**  
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.  
888-244-6638 or 734-426-5553 • FAX: 734-426-5557  
www.aeroflex.com/inmet • inmet@aeroflex.com