



PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70229-X01/X01LF	1.6	2.90
70229-X11/X11LF	2.4	3.53

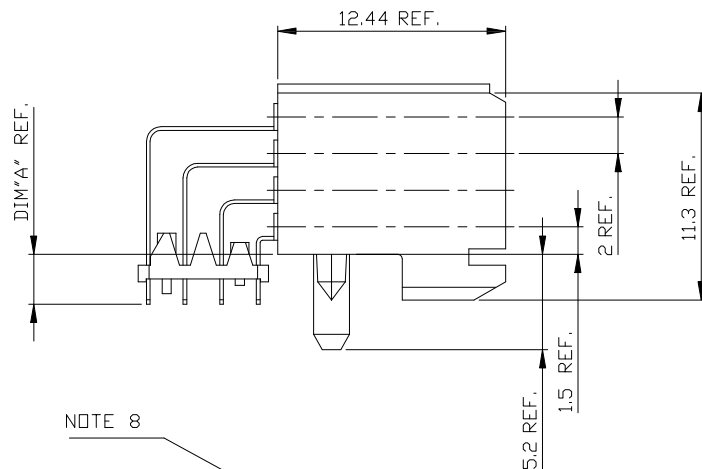


NOTE 8

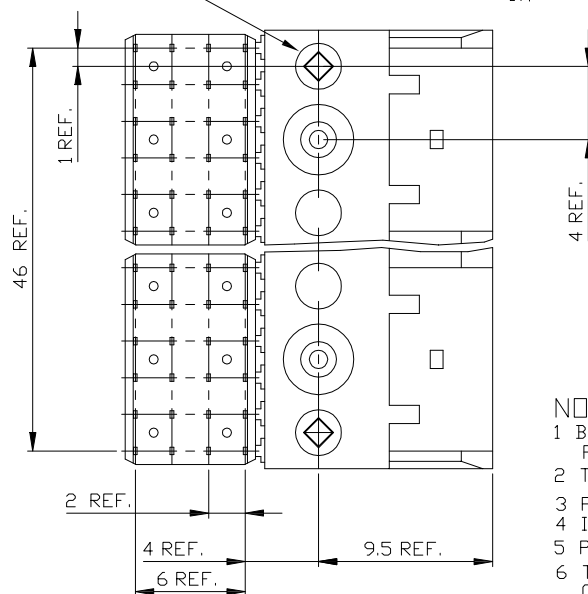


PLATING CONTACT AREA:

PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CD
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL

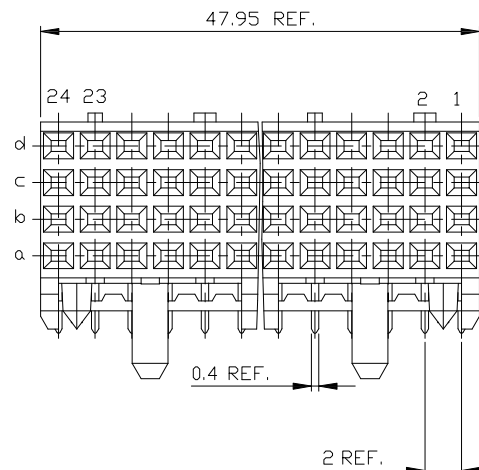


PRODUCT AFTER HOT RIVETTING.

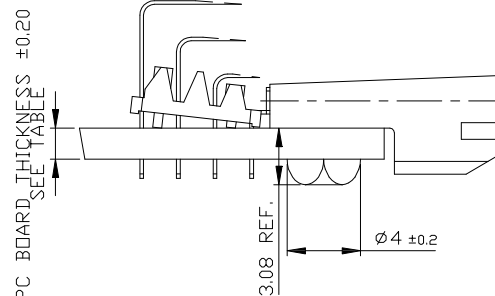

NOTES:






- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8 μ m SnPb 90-97 OR 2-8 鎢 PURE Sn
- INDICATED HOLES ARE UNPLATED.
- PRODUCT MARKING: PART NUMBER & BATCH ID.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER
APPLICATION.
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE
BOTH SIDES OF PRODUCT.

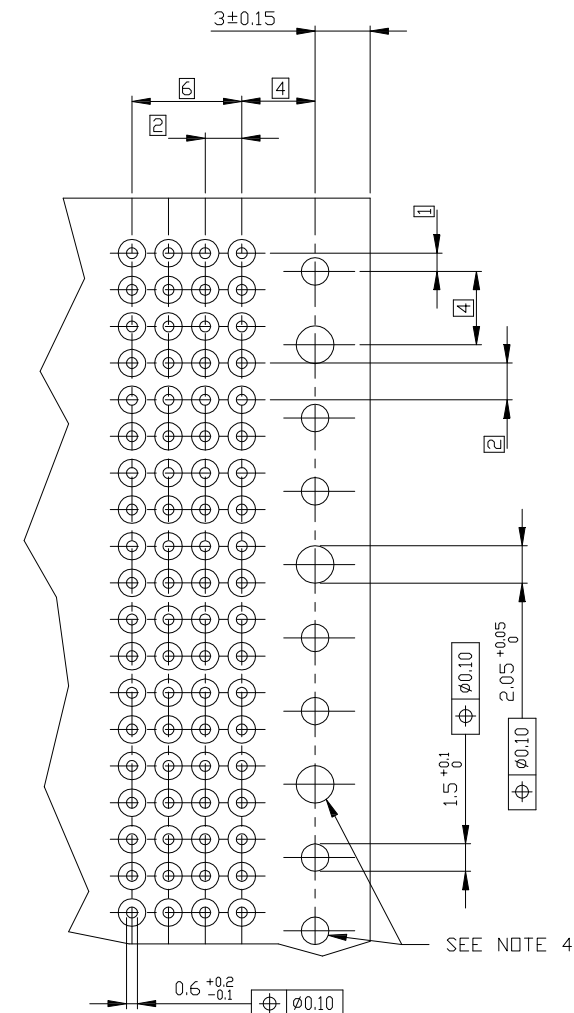

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ecnr	nddr	date	linear		projection	title	www.fciconnect.com	
K	DG04-0104	CLU	04/221						
L	DG06-0477	Cenh	11/20/06						
M	DG07-0168	Cenh	05/08/07	angles					
N	DG09-0068	Cenh	06/06/09	dr	Avan Zanten	900918			
					engr H. Bouwknegt	940308			
H	V00578	LLA	000316	chr	A van Zanten	900918			
J	V00847	LLA	000530	app	H van Voensel	900918			
sheet	revision	N	N	N					
index	sheet	1	2	3					

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70229-X02/X02LF	1.6	2.90
70229-X12/X12LF	2.4	3.53

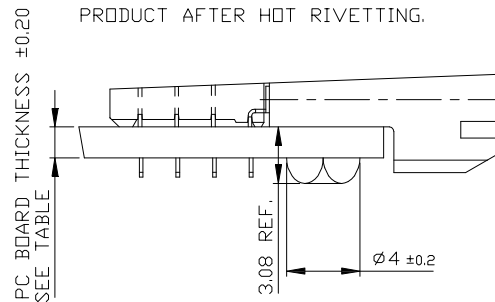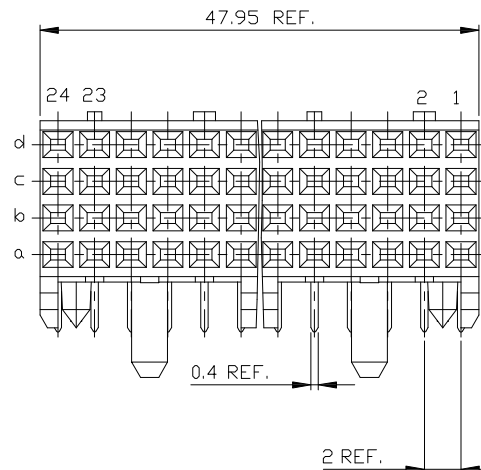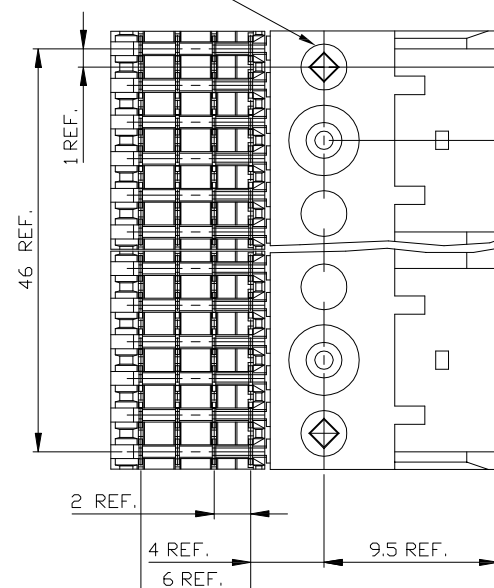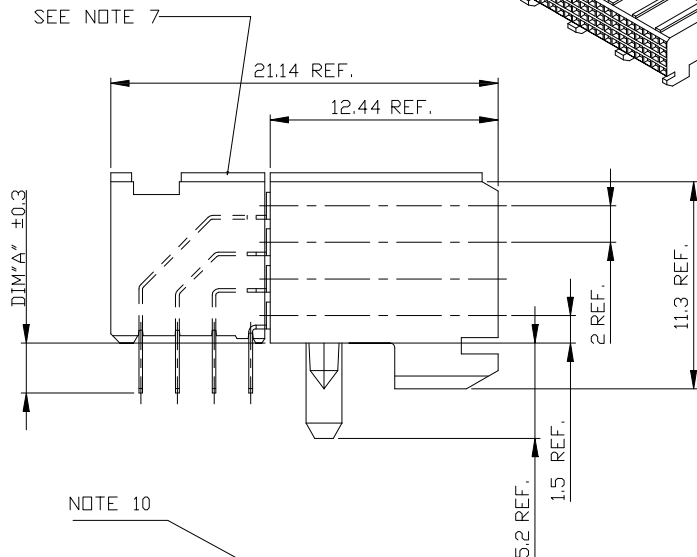


PRODUCT AFTER HOT RIVETTING.

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8 μ m SnPb 90-97 OR 2-8 鍍 PURE Sn
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PARTNUMBER & BATCH ID.
- 6 SET BACK FOR PRESS BLOCK.
- 7 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
- 8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 9 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
10. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

14.64 REF. SEE NOTE 6

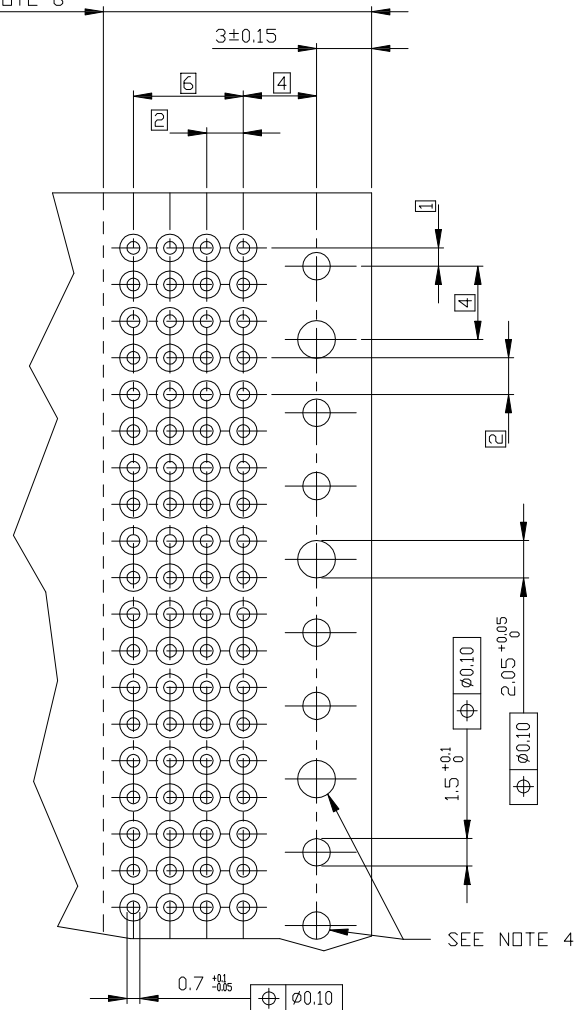

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

PLATING CONTACT AREA:	
PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CO
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltn	ecn	addr	date	linear	projection	title	www.fciconnect.com
N					1	RA FEMALE SIGNAL STB 48 mm VERSION	
				angles	mm	product family METRAL(tm)	code 213
				dr. D. de Bil 970529		size dwg no	sheet 2 of-
				engr. P. Schalk 970529		scale 5:1	
				chr. P. Schalk 970529			
				appel. H. Coolmans 970529			
sheet	revision						
Index	sheet						

