
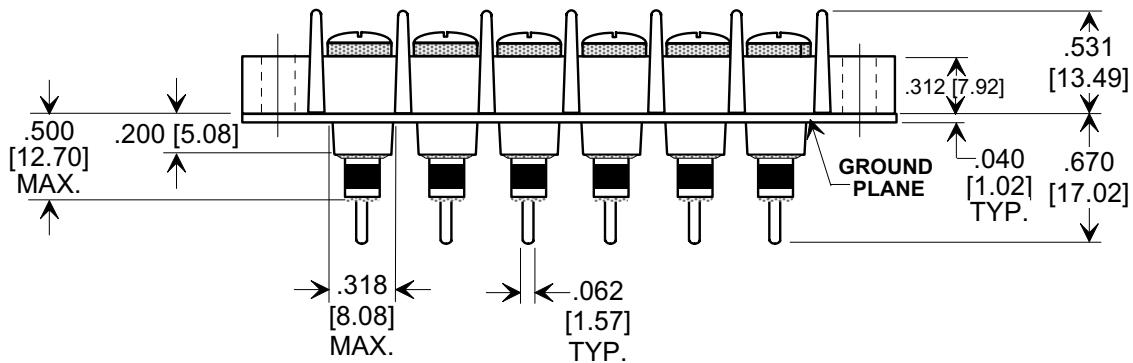
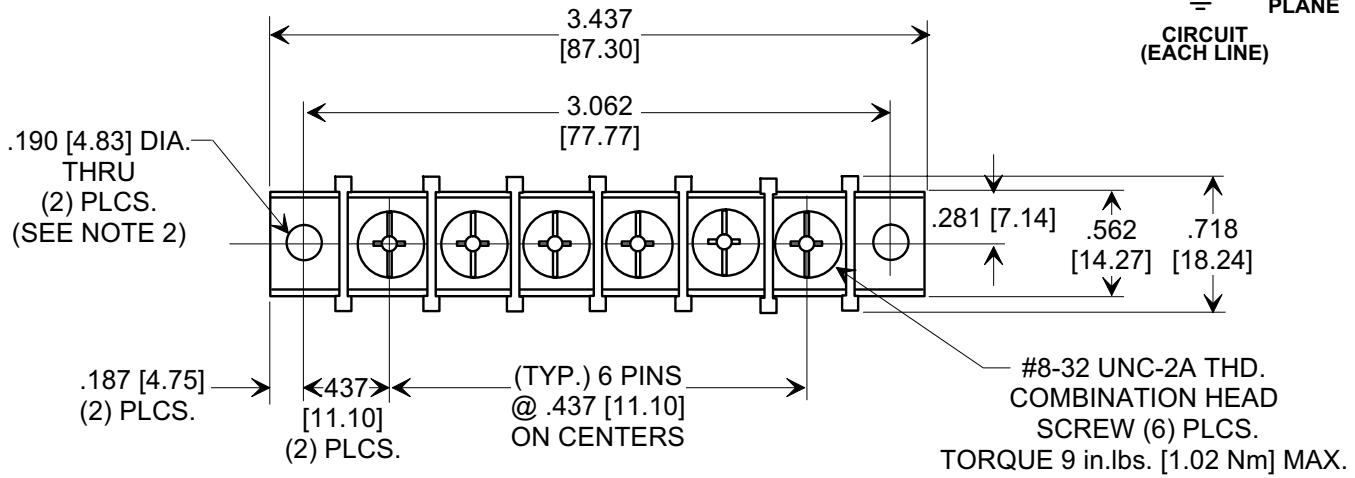



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

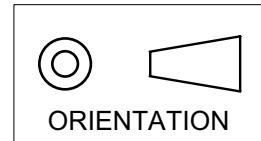

NOTES:

1. MAX. SOLDERING TEMPERATURE 500°F [260°C].
2. BLOCK MOUNTING: RECOMMENDED MOUNTING SCREW (#8 PAN HEAD) TORQUE 5 in. lbs. [0.56 Nm] MAX.

Cx (pF)		WORKING VOLTAGE -40°C TO +105°C		I _{DC}	I.R. MIN. @ 100 (VDC.)	DWV (VDC)	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220			
							10 MHz	100 MHz	1 GHz	10 GHz
5000/2500		250 VAC		20 Amps	10 G Ω	900	5	50	60	65
X-2015 Rev-0	REVISION RECORD						TOLERANCES unless otherwise specified	Title	FILTERED TERMINAL BLOCK 6 POSITION	
Original Release C.O. 940923-1 REVISED WORKING VOLTAGE: S.M. 06-13-96	0	ADDED REF. TO DIMS. S. M. 10-13-97	1	ADDED METRIC, IR & DWV. REVISED NOTES. S. M. 08-24-04	2	ADDED METRIC, IR & DWV. REVISED NOTES. S. M. 08-24-04	2 PLC. DECIMAL ± N/A		Drawn E.C. 09-26-94	
960613-2							3 PLC. DECIMAL ± .030 [0.76]		Scale FULL	
							ANGLES ± N/A		Approved B.M. 09-26-94	
									A 7606-000	
									TUSONIX TUCSON, ARIZONA	