


- Shielded
- Multi Port
- Thru Hole

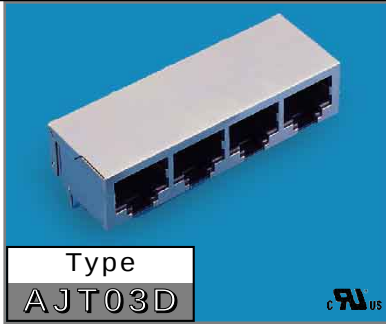



- Side Entry
- CAT 5
- Low Profile
- Shield Ground Front
- 8 Positions

Technical Data


Housing: Glass filled Polyester UL94V-0. Standard color Black
Insert: Glass filled Polyester UL94V-0
Contact: 0.35mm (0.14") thickness Phosphor Bronze Alloy selective Gold plating over Nickel over Tin
Shield: 0.25mm Brass Tin-Lead plated

For electrical specifications see page 4

Dimensions (mm)

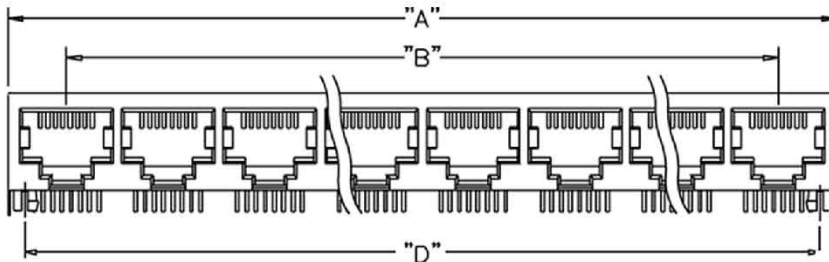

PC Board Layout

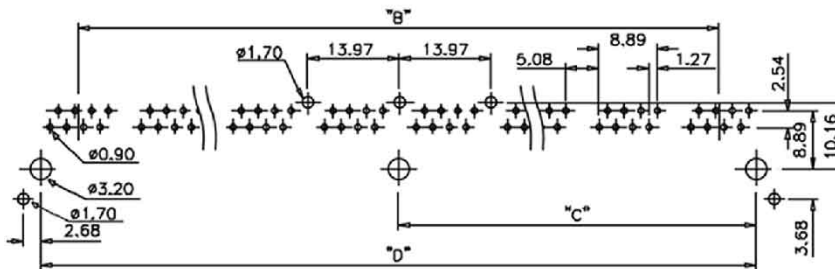

Ports	Dim "A"±0.25	Dim "B"±0.20	Dim "C"±0.10	Dim "D"±0.15
2	31.24	13.97	-----	25.40
4	59.18	41.91	-----	53.34
6	87.12	69.85	-----	81.28
8	115.06	97.79	54.61	109.22

Ordering Information

A	J	T	0	3	D	8	8	2	4
Type	Style	Positions	Contacts	Ports	Plating				
				2, 4, 6, 8	50u"				

Ports	Order No.
2	AJT03D 8824
4	AJT03D 8844
6	AJT03D 8864
8	AJT03D 8884

Standard color: black