


Basic-D

Insulator: 2-piece Polyester 94V0 (white)
Shell: Steel, Zinc plated,
 Yellow chromate coat (optional bright tin
 with indents)*

Pin: Brass, gold plated
Socket: Phosphor bronze, gold plated
Contact Retention: Factory installed,
 non-removable

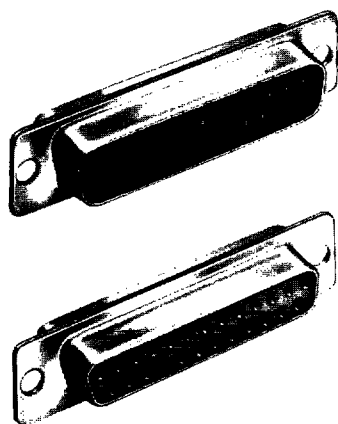


Termination		Solder Cup	P.C. <small>.040 dia., .120" long</small>	Wire Wrap <small>.025 dia., .375" long</small>	Wire Wrap <small>.125 dia., .564" long</small>
Mounting		.120" hole	.120" hole	.120" hole	.120" hole
9	Plug	DE-9P	DE-9PV	DE-9P-F179	DE-9P-F179C
	Socket	DE-9S	DE-9SV	DE-9S-F179	DE-9S-F179C
15	Plug	DA-15P	DA-15PV	DA-15P-F179	DA-15P-F179C
	Socket	DA-15S	DA-15SV	DA-15S-F179	DA-15S-F179C
25	Plug	DB-25P	DB-25PV	DB-25P-F179	DB-25P-F179C
	Socket	DB-25S	DB-25SV	DB-25S-F179	DB-25S-F179C
37	Plug	DC-37P	DC-37PV	DC-37P-F179	DC-37P-F179C
	Socket	DC-37S	DC-37SV	DC-37S-F179	DC-37S-F179C
50	Plug	DD-50P	DD-50PV	DD-50P-F179	DD-50P-F179C
	Socket	DD-50S	DD-50SV	DD-50S-F179	DD-50S-F179C

Econo-D

Insulator: 2-piece Polyester 94V0 (black)
Shell: Steel, Zinc plated,
 Yellow chromate coat (optional bright tin
 with indents)*

Pin: Brass, gold plated
Socket: Phosphor bronze, gold plated
Contact Retention: Snap-in rear release
 (Dip solder type—factory installed)

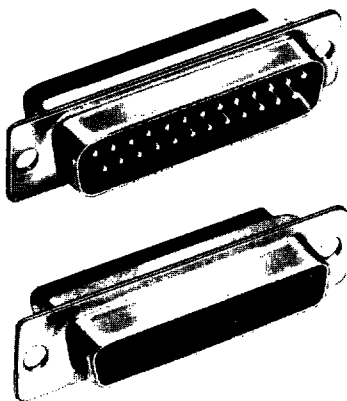


Termination		Crimp/Poke <small>.120" hole with loose machined contacts</small>	Crimp/Poke <small>.120" hole less contacts</small>	Dip Solder <small>.120" hole PC straight .024 dia., .145" long</small>	PC Right Angle <small>.120" hole .024 dia., .155" long</small>
Mounting		.120" hole	.120" hole	.120" hole	.120" hole
9	Plug	DEU-9P	DEU-9PFO	DEU-9PBF	DEU-9PAD
	Socket	DEU-9S	DEU-9SFO	DEU-9SBF	DEU-9SAD
15	Plug	DAU-15P	DAU-15PFO	DAU-15PBF	DAU-15PAD
	Socket	DAU-15S	DAU-15SFO	DAU-15SBF	DAU-15SAD
25	Plug	DBU-25P	DBU-25PFO	DBU-25PBF	DBU-25PAD
	Socket	DBU-25S	DBU-25SFO	DBU-25SBF	DBU-25SAD
37	Plug	DCU-37P	DCU-37PFO	DCU-37PBF	—
	Socket	DCU-37S	DCU-37SFO	DCU-37SBF	—
50	Plug	DDU-50P	DDU-50PFO	DDU-50PBF	—
	Socket	DDU-50S	DDU-50SFO	DDU-50SBF	—

Econo-D (D*U) Contacts


	Type	Part No.
Loose Machined	Pin	030-1952-000
	Socket	030-1953-000
Stamped Reel Flash, 10K Reel	Pin	BCL-1964-20P
	Socket	BCL-1963-20S
Stamped Reel Select Plate 10K Reel	Pin	D110238-034
	Socket	D110238-035

Crimp & Poke Contacts

Machined Contacts



Stamped Contacts



Please note:

- D*C replaced with D*U
- Dual float mounts can be supplied on any size shell. Add suffix "Y" at end of first group of letters, i.e. DEY, DEMY, DEMAY.
- 4-40 Clinch Nuts can be supplied on any size shell. Add suffix "E" at end of first group of letters, i.e. DEE, DEME.
- Connectors qualified to MIL-C-24308 are available. Consult factory.
- Various plating options available. Consult factory.

* Add "TI" after P for plug with indents and bright tin, and "T" after S for bright tin