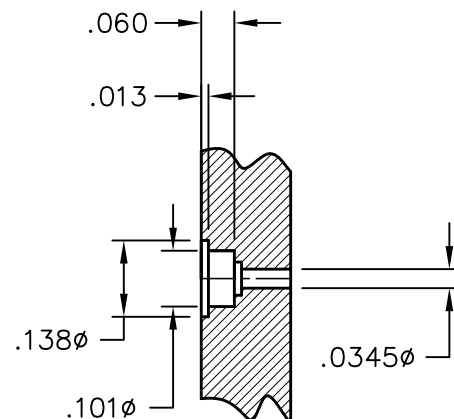
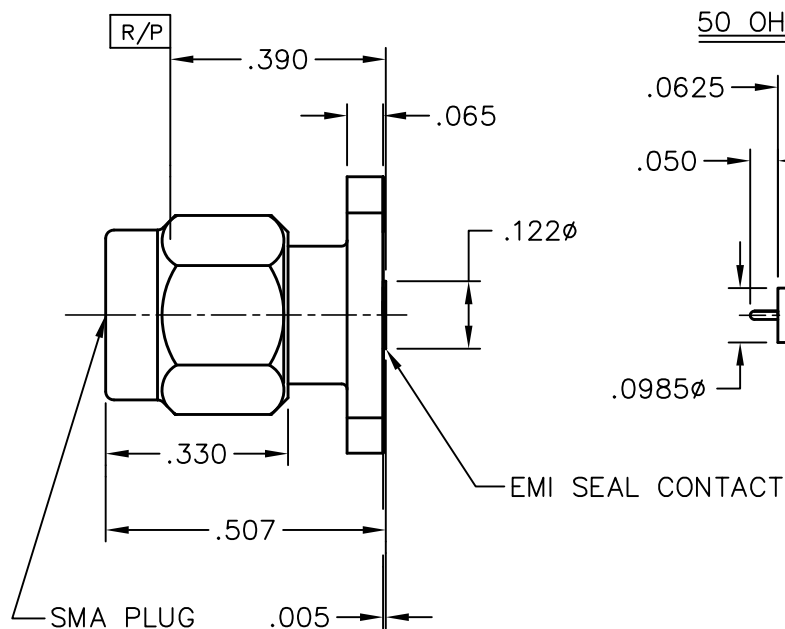
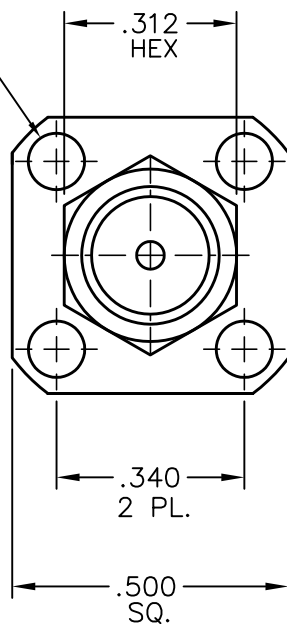



0211-502-3

MATERIAL AND FINISH

COUPLING NUT AND HOUSING:	CRES 303; PASSIVATE
CENTER CONTACT:	BeCu; GOLD PLATE 50-100 MICROINCHES OVER NICKEL PLATE 50 MICROINCHES MIN.
DIELECTRIC:	VIRGIN PTFE
RETAINING RING:	BERYLLIUM COPPER PER QQ-C-530
GASKET:	SILICONE RUBBER
SEAL:	50 OHM SEAL. GOLD PLATE
BUSHING:	BRASS; GOLD PLATE 50-100 MICROINCHES OVER NICKEL PLATE 50 MICROINCHES MIN.

RECOMMENDED
MOUNTING HOLE.102 ϕ THRU 4 PL.

50 OHM SEAL

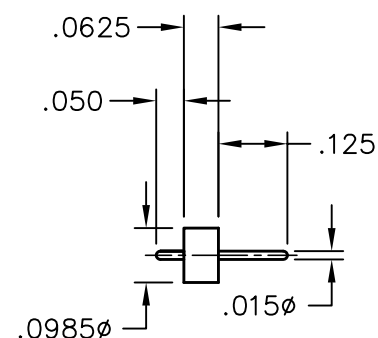

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

SMA PLUG 4 HOLE FLANGE MOUNT WITH
SEPARATE HERMETIC SEAL .015 CC LOW EMI
CAPTURE AND SEAL

IDENT CODE:

82316

REVISION: 01

Corning Gilbert Inc.

SOURCE FILE: —

DWG. NO.: OL-0211-502-3

ASSY. PROC.: —