


M402V Connectors

Male SMT Connectors

A range of 0.5mm pitch SMT male double row connectors with a wide range of board to board stacking heights.



- ❖ Supplied in Tape & Reel packaging.
- ❖ Locating pegs to ensure correct positioning onto board.
- ❖ SMT metal solder-down tabs for additional strain relief.

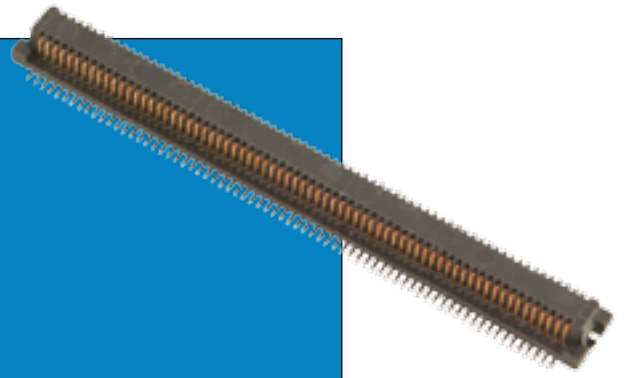

MALE

CALCULATION

A	$B + 3.00$
B	$0.25 \times (\text{Total no. of contacts} - 2)$
C	$B + 0.50$

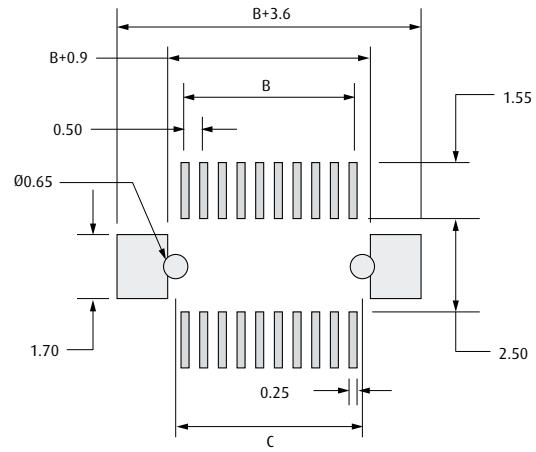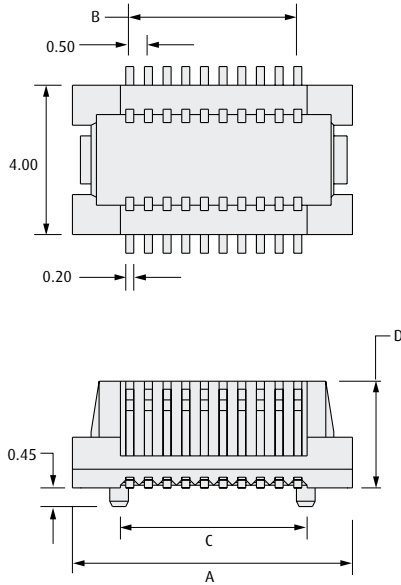

Recommended PC Board Pattern

HOW TO ORDER

M402VM-3- XXX - XXN R

SERIES CODE

TAPE & REEL

TOTAL NUMBER OF CONTACTS

010 to 100, 110, 120, 130, 140, 150, 160

Even numbers only

CONNECTOR HEIGHT

01N	D = 1.62mm	05N	D = 3.50mm
02N	D = 2.00mm	06N	D = 10.00mm
04N	D = 3.00mm	07N	D = 10.50mm

All dimensions in mm.

www.harwin.com

