



Digital Signal Cross-Connect - DS1


Patch Cords – Three-Conductor

Bantam patch cords are plastic jacketed, shielded cords with molded-on plugs with molded insulation between conductors. The patch cords are available with single and dual three-conductor plugs. A cord strain relief feature is included in the plug construction. Dual twisted pair patch cords are recommended for protection against crosstalk, especially during switch cutovers and when patch cords over 12 feet are used.


MSO Market Solutions

6 / 0 3 • 1 2 4 7 3 7 9

Ordering Information	
Length	Catalog Number*
Three-Conductor Single	
1' (.3 m)	PJ712
1.5' (.46 m)	PJ713
2' (.61 m)	PJ714
2.5' (.76 m)	PJ715
3' (.92 m)	PJ716
4' (1.22 m)	PJ718
5' (1.53 m)	PJ720
6' (1.83 m)	PJ722
8' (2.44 m)	PJ1208
10' (3.05 m)	PJ1210
12' (3.66 m)	PJ1212
15' (4.58 m)	PJ1415
20' (6.1 m)	PJ1420
25' (7.63 m)	PJ1425
30' (9.15 m)	PJ1430
50' (15.25 m)	PJ1450
Dual**	
1' (.3 m)	PJ762
2' (.61 m)	PJ764
2.5' (.76 m)	PJ765
3' (.92 m)	PJ766
4' (1.22 m)	PJ768
5' (1.53 m)	PJ770
6' (1.83 m)	PJ772
8' (2.44 m)	PJ1308
10' (3.05 m)	PJ1310
12' (2.66 m)	PJ1312
14' (4.27 m)	PJ1514
20' (6.1 m)	PJ1520
25' (7.63 m)	PJ1525
30' (9.15 m)	PJ1530
35' (10.68 m)	PJ1535
45' (13.73 m)	PJ1545
Dual (twisted pair)	
3' (.92 m)	PJ1303TP
15' (4.58 m)	PJ1315TP
20' (6.1 m)	PJ1320TP
25' (7.63 m)	PJ1325TP

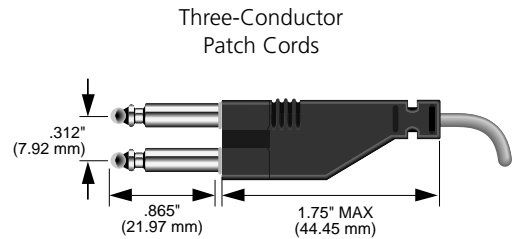

Dual

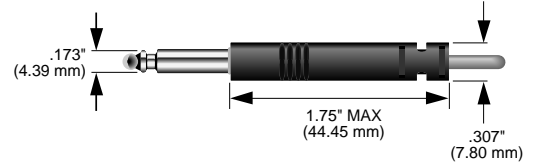

Single



*For nickel-plated patch cords, add the suffix "N".
For plenum-rated fire retardant patch cords, add the suffix "PL".

**Nickel-plated dual patch cords will exhibit loss of plating at 500 insertion/withdrawals.