




Coaxial Cable Assemblies and Breakouts

Pomona®



Cable length is measured from the inside edges of the connectors.
All dimensions are in inches unless otherwise noted.

Coaxial Cable Assemblies and Breakouts

BNC MALE TO TYPE 'N' MALE, 50 OHM CABLE



Pomona ACCESS	Part No.	Length	PRICE
90506	1366-C-24	24"	16.80
	1366-C-36	36"	16.80
	1366-C-48	48"	17.85

RATING: 500 VRMS Max., +80°C (+176°F) Max.
CABLE TYPE: 50Ω, RG58C/U, .195" O.D.
MATERIAL: BNC: See Model BNC-C (p. 34),
Type 'N': See Model 2256 (right)

TYPE 'N' MALE 50 OHM CABLE



Pomona ACCESS	Part No.	Cable Type	Length	PRICE
90135	2256-X-24	50Ω, RG142B/U, .100" O.D.	24"	40.00
	2256-X-36	Double Shield	36"	40.00
	2256-X-48	Rating +200°C Max.	48"	49.00
	2256-X-60		60"	49.00
	2256-C-24		24"	19.80
	2256-C-36	50Ω, RG58C/U, .195" O.D.	36"	19.80
	2256-C-48	Rating +80°C Max.	48"	21.15
	2256-C-60		60"	21.15

Type 'N': Body: White Bronze Plated Brass
Center Contact: Gold Plated Brass

TYPE 'N' MALE 50 OHM CABLE



Pomona ACCESS	Part No.	Length	PRICE
90124	1658-T-18	18"	40.00
	1658-T-24	24"	40.00
	1658-T-36	36"	40.00
	1658-T-48	48"	61.00
	1658-T-60	60"	61.00

RATING: 1000 VRMS Max., +80°C (+176°F) Max.
CABLE TYPE: 50Ω, RG 214/U, .425" O.D.,
Double Shield
Type 'N' Connector materials same as Model
2256 above right.

BNC MALE TO TNC MALE, 50 OHM CABLE



Pomona ACCESS	Part No.	Length	PRICE
90817	1948-C-12	12"	18.65
	1948-C-24	24"	18.65
	1948-C-36	36"	18.65
	1948-C-48	48"	19.95
	1948-C-60	60"	19.95

RATING: 500 VRMS Max., +80°C (+176°F) Max.
CABLE TYPE: 50Ω, RG58C/U, .195" O.D.
BNC/TNC: Body: Brass, Tarnish Resistant Plating
Contact: Gold Plated Brass


PHONO PLUG CABLE WITH MOLDED STRAIN RELIEF



Pomona ACCESS	Part No.	Length	PRICE
90820	5092-K-18	18"	16.55
	5092-K-24	24"	16.55
	5092-K-36	36"	16.55
	5092-K-48	48"	17.45

RATING: 500 VRMS, +50°C (+122°F) Max.
CABLE TYPE: 50Ω, RG174/U, .100" O.D.

PHONO PLUG TO BNC MALE WITH MOLDED STRAIN RELIEF

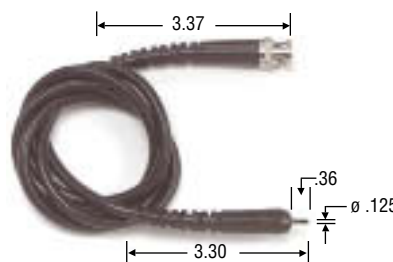

Pomona ACCESS	Part No.	Length	PRICE
90610	4963-E-24	24"	13.20
	4963-E-36	36"	13.80
	4963-E-48	48"	14.50
	4963-E-60	60"	15.15

RATING: 500 VRMS, +50°C (+122°F) Max.
CABLE TYPE: 75Ω, RG59B/U, .242" O.D.
BNC Connector and strain relief materials same as 2249-C (p. 33).


TRIAxIAL MALE CABLES



Pomona ACCESS	Part No.	Length	Cable Type	#Lugs	PRICE
90627	3581-CC-18	18"			53.00
	3581-CC-24	24"			53.00
	3581-CC-36	36"	Twinaxial	2	53.00
	3581-CC-48	48"			54.00
	3581-CC-60	60"			54.00
	5223-36	36"	Triaxial	2	74.00
	5223-60	60"			78.00
	5054-36	36"	Triaxial	3	74.00
	5054-60	60"			79.00

RATING: 500 VRMS, +80°C (+176°F) Max.
Triaxial: Body/Fittings: Brass, Tarnish Resistant Plating
Intermediate and Center Contacts:
Gold Plated Brass
Triaxial to BNC Adapters on page 55.

TRIAxIAL MALE TO THREE ALLIGATOR TEST CLIPS

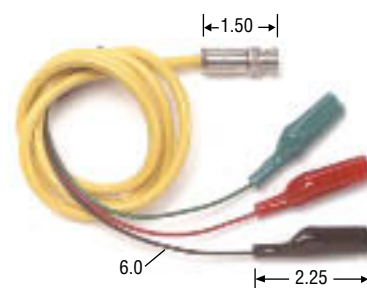

Pomona ACCESS	Model	Special Features	PRICE
90400	4725	2 Lug Triax.	72.00
	5342	3 Lug Triax.	81.00

RATING: 150 VRMS, +50°C (+122°F) Max.
Jaws open to 300" Max.
36" Cable
Triaxial: Body/Fittings: Brass, Tarnish Resistant Plating
Intermediate and Center Contacts:
Gold Plated Brass