





N Connectors

Unless noted, body and pin material is brass, contact is BeCu, insulator is PTFE, plating on components is BA.


N Connectors

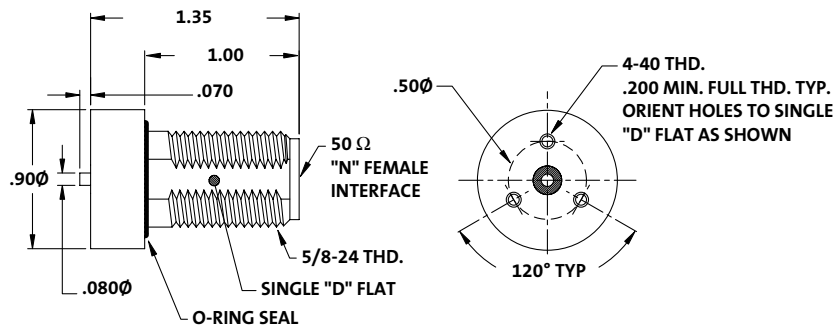

50 Ω N PCB
Three Hole Mount

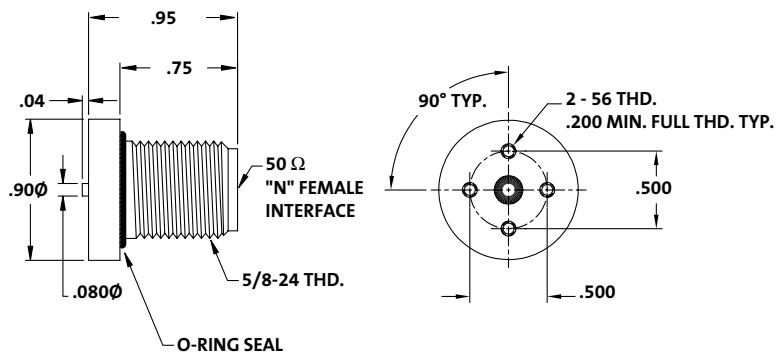


50 Ω N PCB
Four Hole Mount

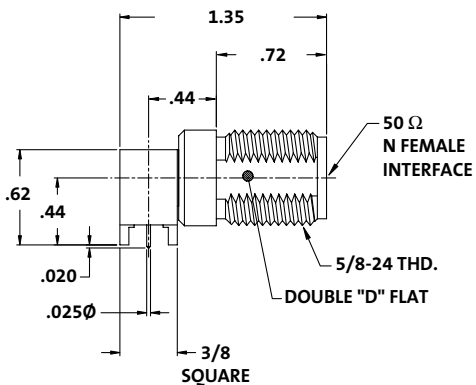

50 Ω Right Angle
N PCB Mount

Catalog Number


NS-5470-1

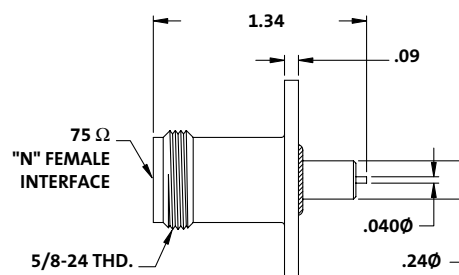

75 Ω Bulkhead
Mount N


Catalog Number

NS-7791-1

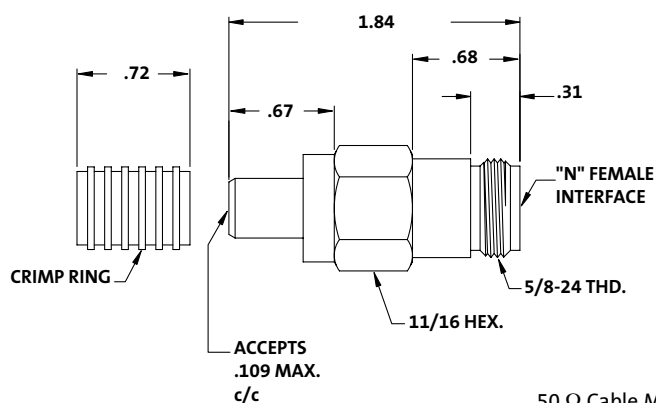


50 Ω Cable Mount
Female N

Catalog Number	Cable	Ω	Crimp Tool
GN-214-AHS/480	RG-214/U	50	G-CRT-480
GN-8-213-AHS/460	RG-8/U, RG-213/U	50	G-CRT-480
GN-8-AHS/480-LD	RG-8/U FOAM	50	G-CRT-480
GN-216-AHS/480	RG-216/U	75	G-CRT-211
GN-11-AHS/460	RG-11/U Up to 60%	75	G-CRT-211
GN-11-AHS/480	RG-11/U Over 60%	75	G-CRT-211
GN-375-CX	.375 Cable Flex	75	G-CRT-211
NS-3008-9	RG-11/U	50	G-CRT-480
NS-3008-23	Belden 8214	50	G-CRT-480
NS-3008-29	Belden 9913	50	G-CRT-480

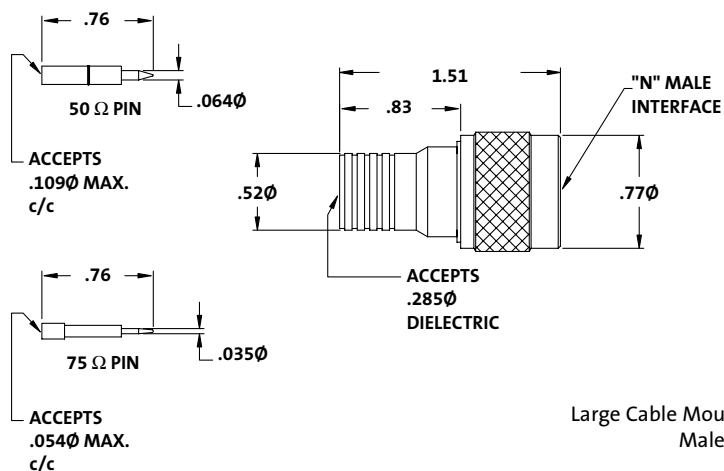

Large Cable Mount
Male N

N Connectors

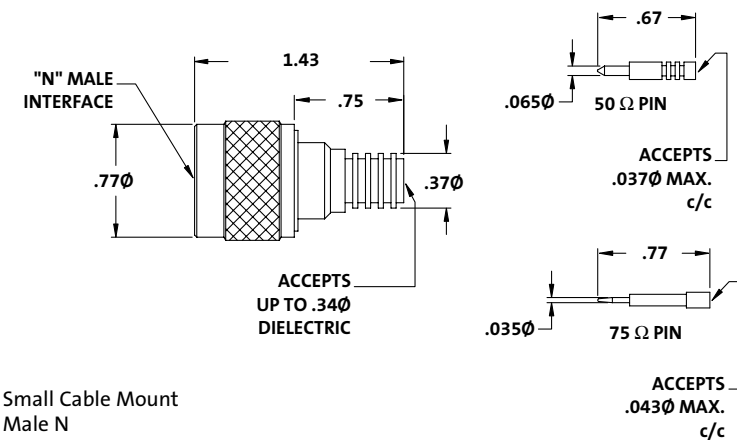

Small Cable Mount
Male N

Catalog Number	Cable	Ω	AØ
GN-58-B-AHS-250	RG-58/U	50	.250
GN-223-AHS-290	RG-223/U	50	.290
GN-59-AHS/290-L	Low density RG-59/U	75	.290
GN-59-AHS/290-H	High density RG-59/U	75	.290
GN-59-AHS/312-L	Low density RG-59/U	75	.312
GN-59-AHS/312-H	High density RG-59/U	75	.312
GN-59-AHP/284-L	Plenum RG-59/U	75	.284
GN-6-AHS/312-L	Low density RG-6/U	75	.312
GN-6-AHS/312-H	High density RG-6/U	75	.312
GN-6-AHS/342-L	Low density RG-6/U	75	.342
GN-6-AHS/342-H	High density RG-6/U	75	.342
GN-6-AHS/357-L	Low density RG-6/U	75	.357
GN-6-AHS/357-H	High density RG-6/U	75	.357
GN-6-AHP/312-L	Plenum RG-6/U	75	.312