

**SPECIFICATIONS**

**Friction Header Connector**

**Mechanical**

**Contact Retention Force:** 1.36KGF Min  
**Durability:** 500 Cycles


**HF01 Series**  
**Friction T/H Type**  
**2.54mm [.100"] Pitch**

**Electrical**


**Voltage Rating:** 600V  
**Current Rating:** 3.0A per pin min  
**Insulation Resistance:** 1000MW min

**Physical**

**Housing:** Thermoplastic, Glass Filled , UL94V-0 Rating  
**Contact:** Copper Alloy  
**Plating:** See "ORDERING INFORMATION"  
**Operating Temperature:** -40 to +125

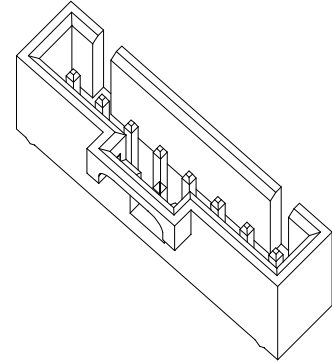

**DRAWING**

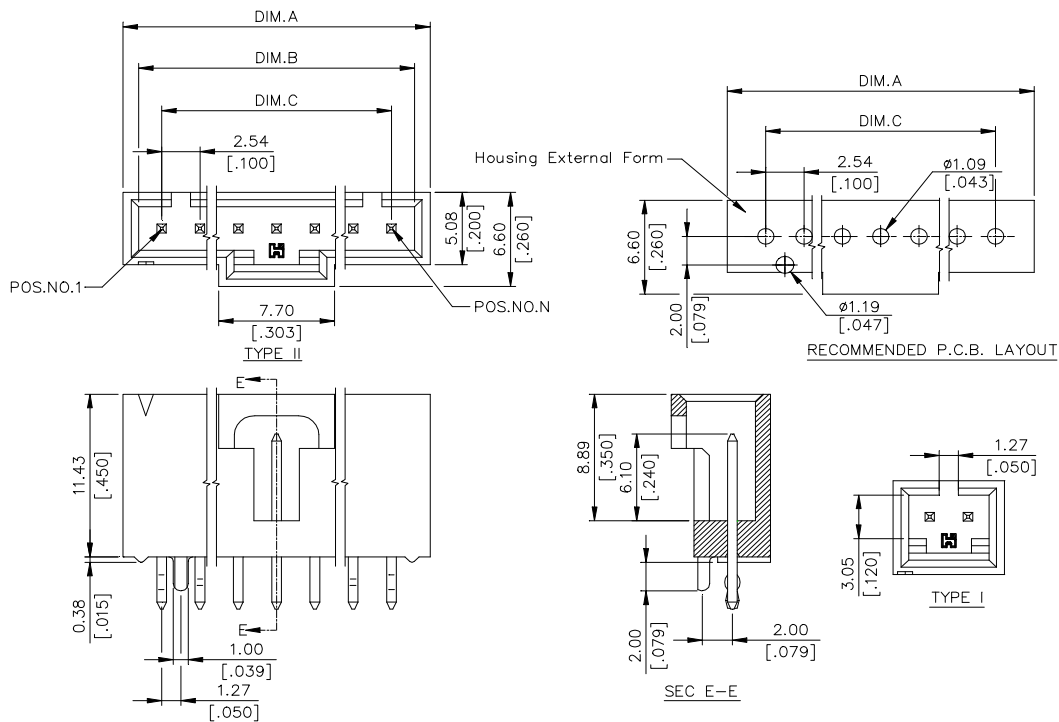

**ORDERING INFORMATION**

**PRODUCT NO.:** H F 01 \*\* \* - \*

Header Series ————  
 High Friction Header ————  
 Termination & Contact Type ————  
 No. of Pos. ————  
 02 = 02 Pos.  
 :  
 16 = 16 Pos.

**Modification Code**  
 None : Standard Product Molded Color Black  
 N : Standard Product Molded Color Ivory  
 G : Standard Product Molded Color Green  
 K : 2-4 Positions all Pins with Kink  
 5-16 Position the 1ST,2ND,N & N-1 Pieces of Terminals are Kinked

**Contact Area Plating**  
 0= Tin/Lead Plating over all  
 1= Gold Flash Plating over all  
 A = 15u" Gold Plated over all

HF0104*-*	4	12.75 [.502]	10.67 [.420]	7.62 [.300]	II
HF0102*-*	2	7.40 [.291]	5.33 [.210]	2.54 [.100]	I
P/N	POS.	DIM. A	DIM. B	DIM. C	TYPE