



16 Amp. Glass Passivated Ultrafast Recovery Rectifier

TO-220AC   Case Positive	<table> <tr> <td style="text-align: center;">Voltage 200 to 600 V</td><td style="text-align: center;">Current 16 A</td></tr> </table> • Glass Passivated Junction • High current capability • The plastic material carries U/L recognition 94 V-0 • Terminals: Leads solderable per MIL-STD202 • Low forward Voltage drop	Voltage 200 to 600 V	Current 16 A
Voltage 200 to 600 V	Current 16 A		

Absolute Maximum Ratings, according to IEC publication No. 134


		SFA1604G	SFA1606G	SFA1608G
V _{RRM}	Peak recurrent reverse voltage (V)	200	400	600
V _{RMS}	Maximum RMS voltage (V)	140	280	420
V _{DC}	Maximum DC blocking voltage (V)	200	400	600
I _{F (AV)}	Maximum average Forward current at T _C = 100 °C	16 A		
I _{FSM}	8.3 ms. peak forward surge current (Jedec Method)	200 A		
T _{RR}	Max. reverse recovery time from I _F = 0.5 A ; I _R = 1 A ; I _{RR} = 0.25 A	35 ns		
C _j	Typical Junction Capacitance at 1 MHz and reverse voltage of 4V _{DC}	130 pF	100 pF	
T _j	Operating temperature range	– 65 to + 150 °C		
T _{stg}	Storage temperature range	– 65 to + 150 °C		

Electrical Characteristics


		SFA1604G	SFA1606G	SFA1608G
V_F	Max. forward voltage drop at $I_F = 16\text{ A}$ $T_j = 25\text{ }^{\circ}\text{C}$	0.975 V	1.3 V	1.7 V
I_R	Max. Instantaneous reverse current at $V_R = V_{RRMax}$ $T_j = 25\text{ }^{\circ}\text{C}$	10 μA		
	$T_j = 100\text{ }^{\circ}\text{C}$	400 μA		
R_{thj-c}	Typical Thermal Resistance	1.0 $^{\circ}\text{C/W}$		

Rating And Characteristic Curves


TYPICAL FORWARD CHARACTERISTIC

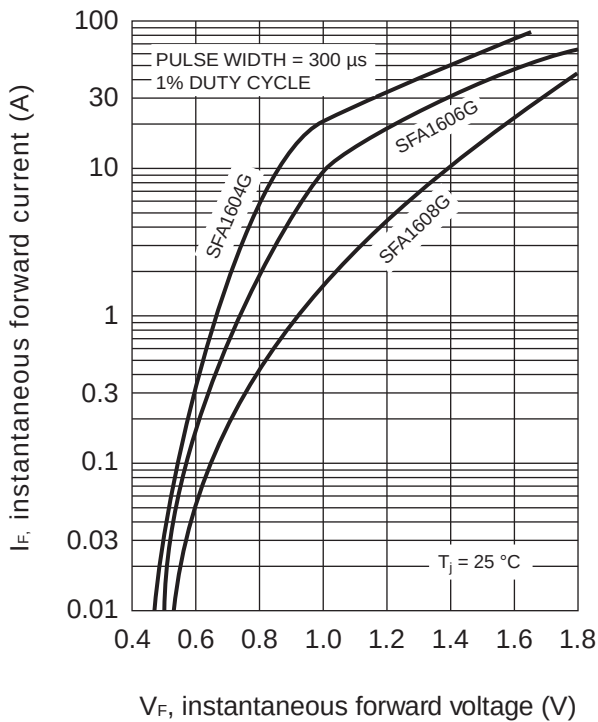


FORWARD CURRENT DERATING CURVE

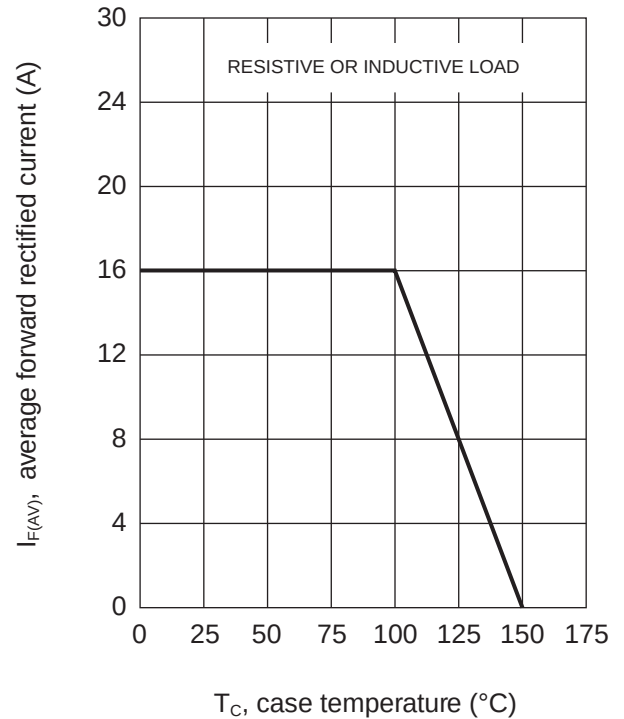

MAXIMUM NON-REPETITIVE
PEAK FORWARD SURGE CURRENT

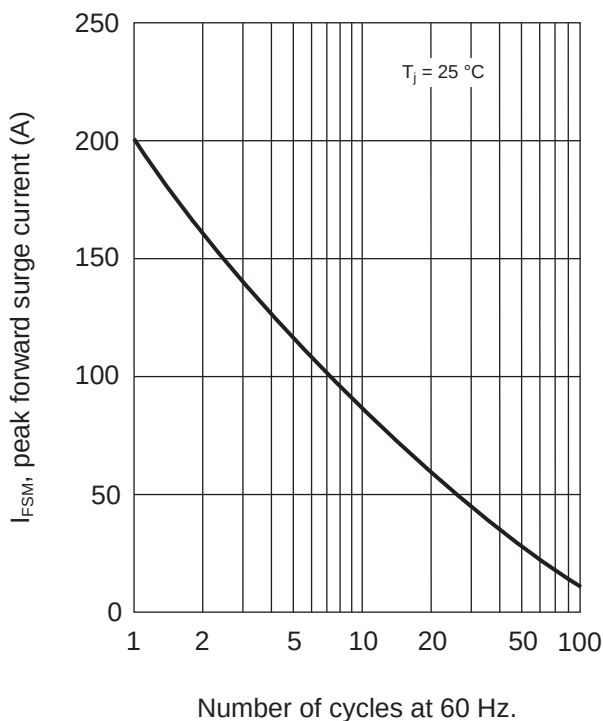


TYPICAL JUNCTION CAPACITANCE

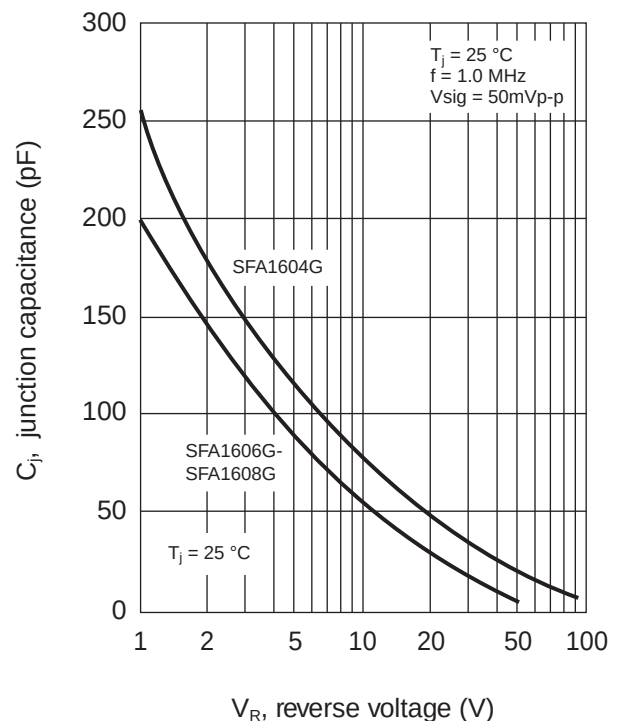

16 Amp. Glass Passivated Ultrafast Recovery Rectifier

PACKAGE MECHANICAL DATA

TO-220AC

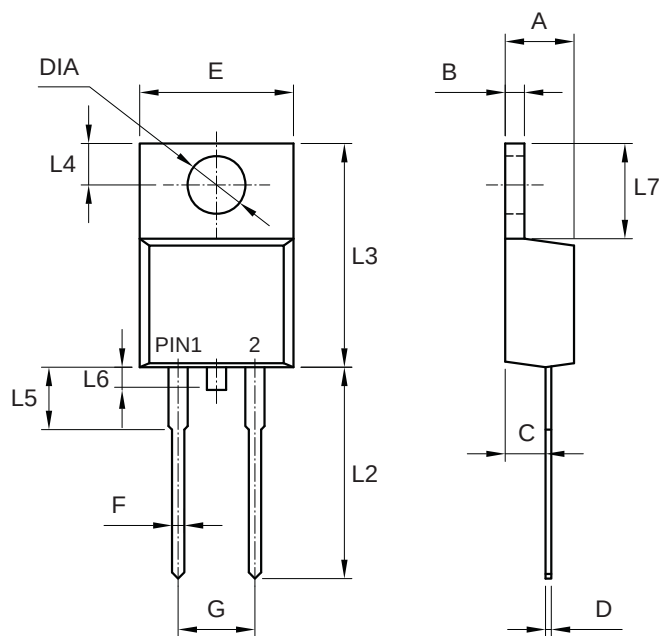

REF.	DIMENSIONS	
	Milimeters	
	Min.	Max.
A	4.44	4.70
B	1.14	1.40
C	2.54	2.79
D	0.35	0.64
E	-	10.50
F	0.68	0.94
G	4.95	5.20
L2	13.46	14.22
L3	14.9	15.10
L4	2.62	2.87
L5	3.56	4.06
L6	-	1.60
L7	5.84	6.86
DIA	3.74	3.91