



SFH610A/617A

5.3 kV TRIOS® Optocoupler

High Reliability

FEATURES

- Variety of Current Transfer Ratios at $I_F=10\text{ mA}$
 - SFH610A/617A-1, 40–80%
 - SFH610A/617A-2, 63–125%
 - SFH610A/617A-3, 100–200%
 - SFH610A/617A-4, 160–320%
- Low CTR Degradation
- Good CTR Linearity Depending on Forward Current
- Withstand Test Voltage, 5300 V_{RMS}
- High Collector-Emitter Voltage, $V_{CEO}=70\text{ V}$
- Low Saturation Voltage
- Fast Switching Times
- Field-Effect Stable by TRIOS
(TTransparent IOOn Shield)
- Temperature Stable
- Low Coupling Capacitance
- End-Stackable, .100" (2.54 mm) Spacing
- High Common-Mode Interference Immunity
(Unconnected Base)
- Underwriters Lab File #52744
- VDE 0884 Available with Option 1

DESCRIPTION

The SFH61XA features a high current transfer ratio, low coupling capacitance and high isolation voltage. These couplers have a GaAs infrared emitting diode emitter, which is optically coupled to a silicon planar phototransistor detector, and is incorporated in a plastic DIP-4 package.


The coupling devices are designed for signal transmission between two electrically separated circuits.

The couplers are end-stackable with 2.54 mm spacing.

Creepage and clearance distances of >8.0 mm are achieved with option 6. This version complies with IEC 950 (DIN VDE 0805) for reinforced insulation up to an operation voltage of 400 V_{RMS} or DC.

Specifications subject to change.

Dimensions in Inches (mm)

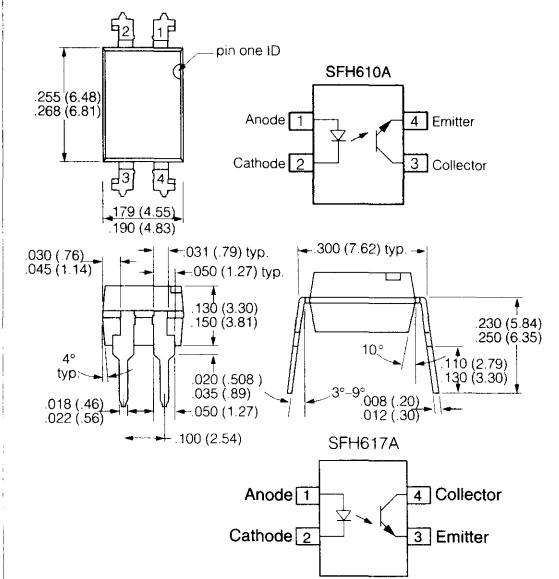

Maximum Ratings

Emitter

Reverse Voltage	6.0 V
DC Forward Current	60 mA
Surge Forward Current ($t_p \leq 10\text{ }\mu\text{s}$)	2.5 A
Total Power Dissipation	100 mW

Detector

Collector-Emitter Voltage	70 V
Emitter-Collector Voltage	7.0 V
Collector Current	50 mA
Collector Current ($t_p \leq 1.0\text{ ms}$)	100 mA
Total Power Dissipation	150 mW

Package

Isolation Test Voltage between Emitter and Detector,
refer to Climate DIN 40046, part 2, Nov. 74 5300 V _{RMS}
Creepage ≥7.0 mm
Clearance ≥7.0 mm
Insulation Thickness between Emitter and Detector ≥0.4 mm
Comparative Tracking Index
per DIN IEC 112/VDEO 303, part 1 ≥175
Isolation Resistance
$V_{IO}=500\text{ V}, T_A=25^\circ\text{C}$ $\geq 10^{12}\text{ }\Omega$
$V_{IO}=500\text{ V}, T_A=100^\circ\text{C}$ $\geq 10^{11}\text{ }\Omega$
Storage Temperature Range -55 to +150°C
Ambient Temperature Range -55 to +100°C
Junction Temperature 100°C
Soldering Temperature (max. 10 s. Dip Soldering
Distance to Seating Plane ≥1.5 mm) 260°C


Characteristics ($T_A=25^\circ\text{C}$)

Description	Symbol		Unit	Condition
Emitter (IR GaAs)				
Forward Voltage	V_F	1.25 (≤ 1.65)	V	$I_F=60 \text{ mA}$
Reverse Current	I_R	0.01 (≤ 10)	μA	$V_R=6.0 \text{ V}$
Capacitance	C_0	13	pF	$V_R=0 \text{ V}, f=1.0 \text{ MHz}$
Thermal Resistance	R_{thJA}	750	K/W	
Detector (Si Phototransistor)				
Capacitance	C_{CE}	5.2	pF	$V_{CE}=5 \text{ V}, f=1.0 \text{ MHz}$
Thermal Resistance	R_{thJA}	500	K/W	
Package				
Collector-Emitter Saturation Voltage	V_{CEsat}	0.25 (≤ 0.4)	V	$I_F=10 \text{ mA}, I_C=2.5 \text{ mA}$
Coupling Capacitance	C_C	0.4	pF	

Current Transfer Ratio (I_C/I_F at $V_{CE}=5.0 \text{ V}$) and Collector-Emitter Leakage Current by Dash Number

Description	-1	-2	-3	-4	
$I_C/I_F (I_F=10 \text{ mA})$	40–80	63–125	100–200	160–320	%
$I_C/I_F (I_F=1.0 \text{ mA})$	30 (>13)	45 (>22)	70 (>34)	90 (>56)	
Collector-Emitter Leakage Current, I_{CEO} $V_{CE}=10 \text{ V}$	2.0 (≤ 50)	2.0 (≤ 50)	5.0 (≤ 100)	5.0 (≤ 100)	nA


**Figure 1. Switching Times (Typical)
Linear Operation (without saturation)**

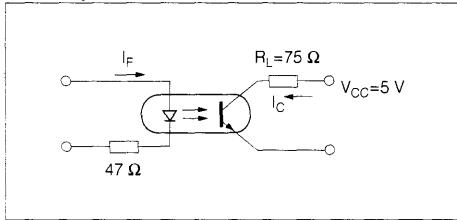

$I_F=10 \text{ mA}, V_{CC}=5.0 \text{ V}, T_A=25^\circ\text{C}$

Load Resistance	R_L	75	Ω
Turn-on Time	t_{ON}	3.0	μs
Rise Time	t_R	2.0	
Turn-off Time	t_{OFF}	2.3	
Fall Time	t_F	2.0	
Cut-off Frequency	F_{CO}	250	kHz

**Figure 2. Switching Operation
(with saturation)**

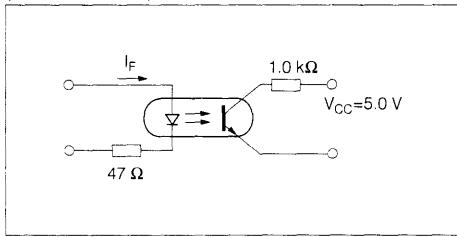

Parameter	Sym.	Dash No.			Unit
		-1 $I_F=20 \text{ mA}$	-2 and -3 $I_F=10 \text{ mA}$	-4 $I_F=5.0 \text{ mA}$	
Turn-on Time	t_{ON}	3.0	4.2	6.0	μs
Rise Time	t_R	2.0	3.0	4.6	
Turn-off Time	t_{OFF}	18	23	25	
Fall Time	t_F	11	14	15	

Figure 3. Current Transfer Ratio (typ.) vs. Temperature $I_F=10 \text{ mA}$, $V_{CC}=5.0 \text{ V}$

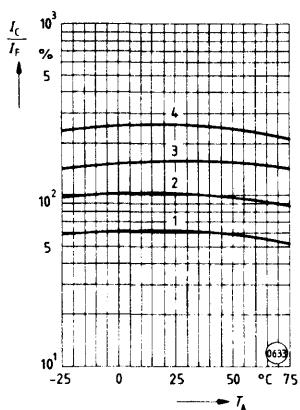


Figure 4. Output Characteristics (typ.) Collector Current vs. Collector-emitter Voltage $T_A=25^\circ\text{C}$

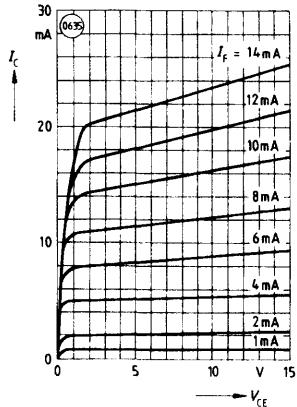


Figure 5. Diode Forward Voltage (typ.) vs. Forward Current

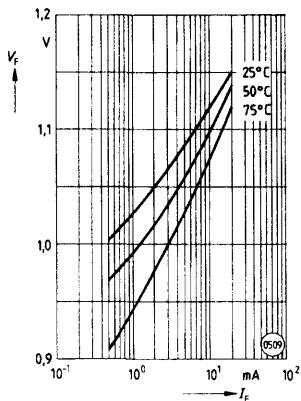


Figure 6. Transistor capacitance (typ.) vs. collector-emitter voltage $T_A=25^\circ\text{C}$, $f=1.0 \text{ MHz}$

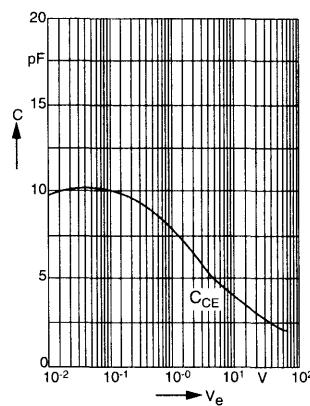


Figure 7. Permissible Pulse Handling Capability. Forward Current vs. Pulse Width Pulse cycle D=parameter, $T_A=25^\circ\text{C}$

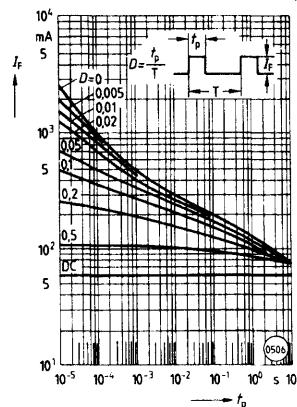


Figure 8. Permissible Power Dissipation vs. Ambient Temperature

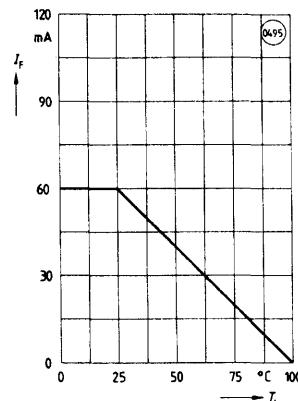


Figure 9. Permissible Diode Forward Current vs. Ambient Temperature

