

35 Watt DC-DC Converters

IMX 35 Series


Wide input voltage ranges up to 75 V DC
2...4 isolated outputs up to 60 V DC
1500 V DC I/O electric strength test voltage

- Immunity to IEC/EN 61000-4-2,-3,-4,-5 and -6
- Programmable input undervoltage lock-out
- Shut down input
- Output voltages adjustable with flexible load distribution
- Frequency synchronisation
- Outputs no-load, overload and short-circuit proof
- Operating ambient temperature up to $-40...85^{\circ}\text{C}$
- Thermal protection
- 3" \times 2,5" case with 10.5 mm profile or 8.9 mm profile open frame
- Supplementary insulation

Safety according to IEC/EN 60950, UL 1950



Approvals pending



Summary

The IMX 35 series of board mountable 35 Watt DC-DC converters has been designed according to the latest industry requirements and standards. The converters are particularly suitable for use in mobile or stationary applications in transport, railways, industry, or telecommunication where variable input voltages or high transient voltages are prevalent.

Covering a total input voltage range from 9 up to 75 V with 2 different types. The units are available with double, triple and quad outputs, electrically isolated, from 3.3 V up to 60 V externally adjustable and with flexible load distribution. A shut down input allows remote converter on/off. Features include consistently high efficiency over the entire input voltage range, high reliability and excellent dynamic response to load and line changes.

The converters are designed and built according to the international safety standards IEC/EN 60950, UL 1950, CAN/CSA C22.2 No.950-95. LGA, UL and cUL approvals are in progress. The IMX 35 types provide supplementary insula-

tion. Connected to a secondary circuit the 40 IMX 35 types feature SELV outputs even if the voltage at the converter input exceeds the SELV-limit of 60 V DC.

The circuit comprises of two planar magnetics devices and all components are automatically assembled and solidly soldered onto a single PCB without any wire connection. Magnetic feedback ensures maximum reliability and repeatability in the control loop over all operating conditions. Careful considerations of possible thermal stresses ensure the absence of hot spots providing long life in environments where temperature cycles are a reality. The thermal design without using any potting material allows operation up to an ambient temperature of $-40...85^{\circ}\text{C}$ in free air. For extremely high vibration environments the case has holes for screw mounting. Inhibit or open frame mounting provide a high level of application specific engineering and design-in flexibility.

Table of Contents

	Page		Page
Summary	1	Auxiliary Functions	11
Type Survey and Key Data	2	Electromagnetic Compatibility (EMC)	13
Type Key	3	Immunity to Environmental Conditions	14
Functional Description	4	Mechanical Data	15
Electrical Input Data	6	Safety and Installation Instructions	16
Electrical Output Data	8	Description of Option	18

Type Survey and Key Data

Table 1: Type survey

Output 1		Output 2		Output 3		Output 4		Input voltage	Eff.	Type designation	Trim ¹	Opt. ²
$U_{o,nom}$ [V DC]	$I_{o,nom}$ [A]	$U_{i,min...U_{i,max}}$ [V DC]	η_{typ} [%]									
5	2.7	5	2.7	-	-	-	-	9...36	84	20 IMX 35-05-05-8	primary	
5	2.8	5	2.8	-	-	-	-	18...75	84	40 IMX 35-05-05-8	primary	
12	1.3	12	1.3	-	-	-	-	9...36	87	20 IMX 35-12-12-8	primary	
12	1.4	12	1.4	-	-	-	-	18...75	87	40 IMX 35-12-12-8	primary	
15	1.1	15	1.1	-	-	-	-	9...36	87	20 IMX 35-15-15-8	primary	
15	1.2	15	1.2	-	-	-	-	18...75	87	40 IMX 35-15-15-8	primary	
3.3	3.5	5	1.3	5	1.3	-	-	9...36	81	20 IMX 35-03D05-8 ³	second.	i, Y
3.3	4.25	5	1.35	5	1.35	-	-	18...75	83	40 IMX 35-03D05-8 ³	second.	i, Z
3.3	3.5	12	0.65	12	0.65	-	-	9...36	84	20 IMX 35-03D12-8 ³	second.	i, Y
3.3	4.25	12	0.7	12	0.7	-	-	18...75	86	40 IMX 35-03D12-8 ³	second.	i, Z
3.3	3.5	15	0.55	15	0.55	-	-	9...36	84	20 IMX 35-03D15-8 ³	second.	i, Y
3.3	4.25	15	0.6	15	0.6	-	-	18...75	86	40 IMX 35-03D15-8 ³	second.	i, Z
5.1	2.9	5	1.35	5	1.35	-	-	9...36	81	20 IMX 35-05D05-8 ³	second.	i, Y
5.1	3.4	5	1.4	5	1.4	-	-	18...75	83	40 IMX 35-05D05-8 ³	second.	i, Z
5.1	2.9	12	0.65	12	0.65	-	-	9...36	84	20 IMX 35-05D12-8 ³	second.	i, Y
5.1	3.4	12	0.7	12	0.7	-	-	18...75	86	40 IMX 35-05D12-8 ³	second.	i, Z
5.1	2.9	15	0.55	15	0.55	-	-	9...36	84	20 IMX 35-05D15-8 ³	second.	i, Y
5.1	3.4	15	0.6	15	0.6	-	-	18...75	87	40 IMX 35-05D15-8 ³	second.	i, Z
5	1.35	5	1.35	5	1.35	5	1.35	9...36	86	20 IMX 35 D05D05-8	primary	
5	1.4	5	1.4	5	1.4	5	1.4	18...75	87	40 IMX 35 D05D05-8	primary	
5	1.35	12	0.65	12	0.65	5	1.35	9...36	86	20 IMX 35 D05D12-8	primary	
5	1.4	12	0.7	12	0.7	5	1.4	18...75	88	40 IMX 35 D05D12-8	primary	
5	1.35	15	0.55	15	0.55	5	1.35	9...36	87	20 IMX 35 D05D15-8	primary	
5	1.4	15	0.6	15	0.6	5	1.4	18...75	88	40 IMX 35 D05D15-8	primary	i, Z
12	0.65	12	0.65	12	0.65	12	0.65	9...36	87	20 IMX 35 D12D12-8	primary	
12	0.7	12	0.7	12	0.7	12	0.7	18...75	89	40 IMX 35 D12D12-8	primary	
15	0.55	15	0.55	15	0.55	15	0.55	9...36	88	20 IMX 35 D15D15-8	primary	
15	0.6	15	0.6	15	0.6	15	0.6	18...75	89	40 IMX 35 D15D15-8	primary	

¹ For the units IMX 35-05-05, IMX 35-12-12, IMX 35-15-15 and all the quad versions with equal output voltages, the Trim input (pin 5) is on the primary side and influences all outputs simultaneously while pin 18 is not connected. For the quad versions with unequal output voltages (e.g. 40 IMX 35 D05D12-8) the Trim input (pin 5) influences only the first power train i.e. V_{01} and V_{04} . For the triple versions the Trim input (pin 18) is on the secondary side and influences the first output (V_{01}) only.

² For minimum quantity contact Power-One.


³ For lead times contact Power-One.

Type Key

Double output units

Input voltage range U_i	
9...36 V DC	20
18...75 V DC	40
Series	IMX 35
Output 1 of double types (5, 12, 15 V)	05, 12, 15
Output 2 of double types (5, 12, 15 V)	05, 12, 15
Operating ambient temperature range T_A	
-40...85°C	-8


20 IMX 35 - 12 - 12 - 8

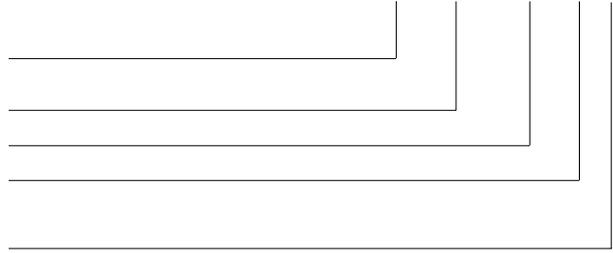

Triple output units

Input voltage range U_i	
9...36 V DC	20
18...75 V DC	40
Series	IMX 35
Output 1 of triple types (3.3, 5 V)	03, 05
Output 2/3 of triple types (3.3, 5 V)	D05, D12, D15
Operating ambient temperature range T_A	
-40...85°C	-8
Options:	
Inhibit	i
Base plated open frame	Y ¹
Open frame	Z ²


40 IMX 35 - 05 D05 - 8 i Z

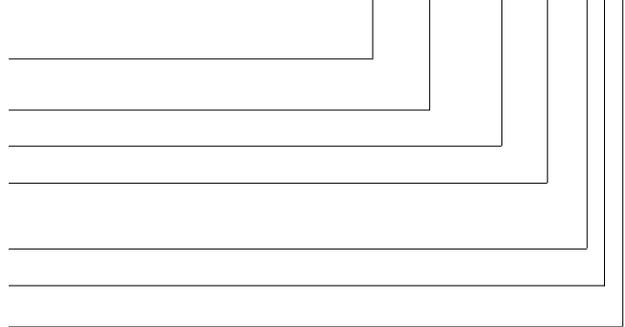

Quad output units

Input voltage range U_i	
9...36 V DC	20
18...75 V DC	40
Series	IMX 35
Output 1/4 of quad types (5, 12, 15 V)	D05, D12, D15
Output 2/3 of quad types (5, 12, 15 V)	D05, D12, D15
Operating ambient temperature range T_A	
-40...85°C	-8
Options:	
Inhibit	i
Open frame	Z ²

40 IMX 35 D05 D05 - 8 i Z

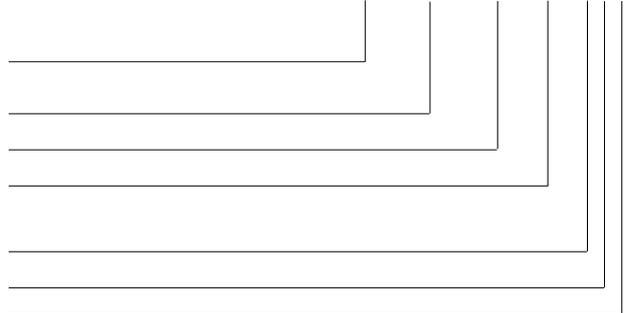

¹ 20 IMX 35 triple output types.

² All models except 20 IMX 35-triple output types.

Functional Description

The IMX 35 family of DC-DC converters consists of two feedback controlled interleaved switching flyback power trains using current mode PWM (pulse width modulation). Functionally the converters are of three main types. The double output types consist of two electrically isolated outputs Vo1, Vo2. Vo1 and Vo2 derive from two power trains and are electrically isolated. Voltage regulation for each output is achieved with passive transformer feedback from the main transformer of each power train. Adjustment of the outputs voltages in the range of 80...105% of $U_{o\text{ nom}}$ is possible by use of the Trim input on the primary side (See: *Block diagram, dual output types.*)

The triple output types consist of 3 outputs Vo1, Vo2 and Vo3. Vo1 (3.3 or 5.1 V) is generated by a power train using state of the art Schottky diode (20 IMX 35) or a synchronous rectifier technology (40 IMX 35) thus enabling high efficiency. Also there is active magnetic feedback on this output via a pulse transformer which results in very tight and reliable regulation of the output voltage. The other two outputs Vo2 and Vo3 are electrically isolated double outputs. Vo2, Vo3 are restricted to being of the same output voltage (i.e. D05, D12, etc.). Voltage regulation is achieved with a passive transformer feedback from the main transformer of that power train. Adjustment of the output 1 (U_{o1}) is provided by the Trim1 pin referenced to the secondary side and allows for programming of the voltage of output 1 in the range of approx. 80...105% of $U_{o\text{ nom}}$. (See: *Block diagram, triple output types*)

The quad output type consists of 4 outputs and two power trains. Vo1, Vo4 derive from the first power train and Vo2, Vo3 from the second one (thus each pair of outputs is independent from the other one). Voltage regulation for each pair of outputs is achieved with passive transformer feedback from the main transformer of each power train. Each pair of outputs are restricted to being of the same output voltage type (i.e. D05, D12, etc.). If both power trains have the same output voltage, all outputs may be adjusted by means of the Trim input. (In case of different output voltages, the Trim1/4 input influences only Vo1 and Vo4. See: *Block diagram, quad output types.*)

Current limitation is provided by the primary circuit for each power train and limits the possible output power for each pair of outputs. In the case of an overload on either of the power trains which causes the output voltage to drop below typically 60% of $U_{o\text{ nom}}$, the entire converter will shut down and automatically restart in short intervals.

Overtemperature protection is provided, which will shut down the converter in excessive overload conditions with automatic restart.

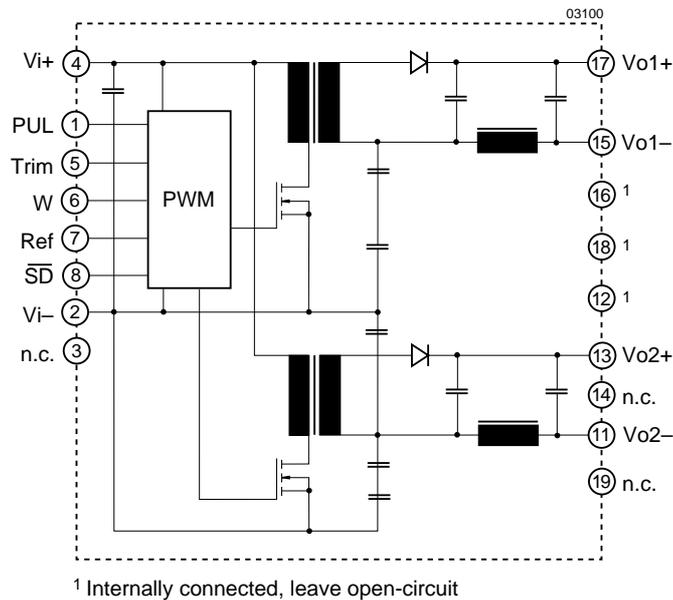


Fig. 1
Block diagram 1, double output types

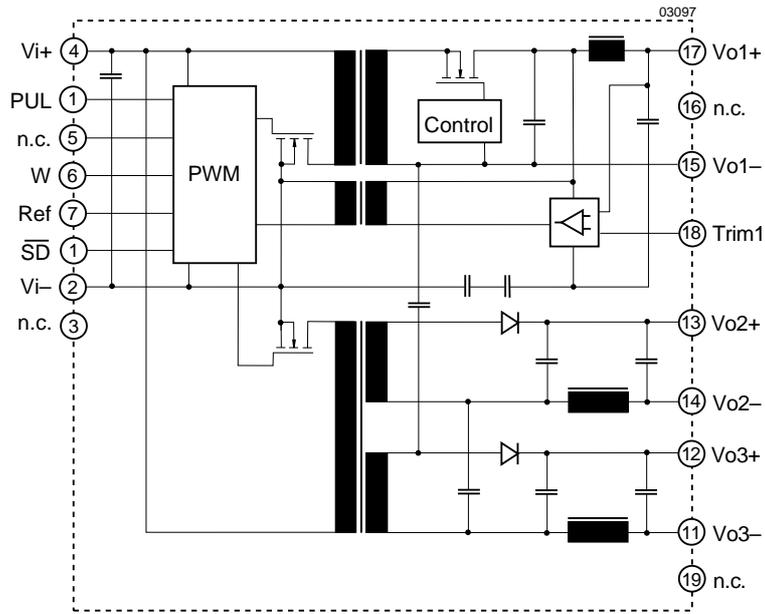


Fig. 2
Block diagram 2, triple output types

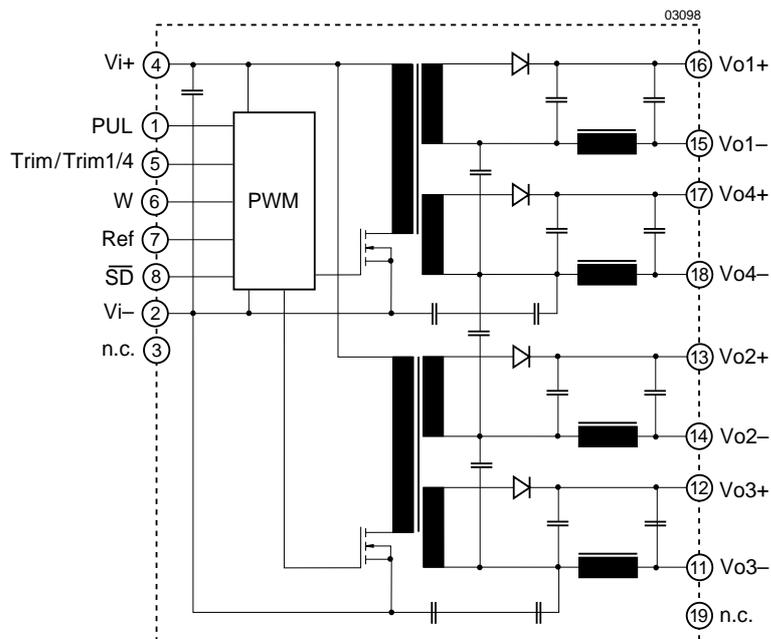


Fig. 3
Block diagram 3, quad output types

Electrical Input Data

General conditions:

- $T_A = 25^\circ\text{C}$, unless T_C is specified.
- Shut down pin left open circuit (not connected).
- Trim not connected.

Table 2: Input Data

Input		Conditions		20 IMX			40 IMX			Unit
Characteristics				min	typ	max	min	typ	max	
U_i	Input voltage range ¹	$T_A \text{ min...} T_A \text{ max}$		9 ²			18 ²			V DC
$U_{i \text{ nom}}$	Nominal input voltage	$I_o = 0...I_o \text{ nom}$		20			40			
$U_{i \text{ sur}}$	Repetitive surge voltage	Abs. max input (3 s)		40			100			
$t_{\text{start up}}$	Converter start-up time ²	Switch on	Worst case condition at $U_{i \text{ min}}$ and full load	0.25		0.5	0.25		0.5	s
		$\overline{\text{SD}}$ high				0.1	0.1			
t_{rise}	Rise time ³	$U_{i \text{ nom}}$	resist load	5		5				ms
		$I_o \text{ nom}$	capac. load	10	20	10	20			
$I_{i \text{ o}}$	No load input current	$I_o = 0, U_{i \text{ min}}...U_{i \text{ max}}$		70			50			mA
I_{rr}	Reflected ripple current	$I_o = 0...I_o \text{ nom}$		30			30			
$I_{\text{inr p}}$	Inrush peak current ⁴	$U_i = U_{i \text{ nom}}$		8			9			A
C_i	Input capacitance	for surge calculation		2			1.3			μF
$U_{\overline{\text{SD}}}$	Shut down voltage	Unit shut down		–10...0.7			–10...0.7			V DC
		Unit operating		open-circuit or 2...20			open-circuit or 2...20			
$R_{\overline{\text{SD}}}$	Shut down input resistance	For current calculations		approx. 10			approx. 10			k Ω
$I_{\overline{\text{SD}}}$	Input current if unit shut down	$U_{i \text{ min}}...U_{i \text{ max}}$		12			6			mA
f_s	Switching frequency	$U_{i \text{ min}}...U_{i \text{ max}}, I_o = 0...I_o \text{ nom}$		approx. 220			approx. 220			kHz
u_{RFI}	Input RFI level, conducted	EN 55022 ⁵		B ⁶			B ⁶			

¹ $U_{i \text{ min}}$ will not be as stated if U_o is increased above $U_o \text{ nom}$ by use of Trim input. If the output voltage is set to a higher value, $U_{i \text{ min}}$ will be proportionately increased.

² Input undervoltage lock-out at typ. 90% of $U_{i \text{ min}}$.

³ Measured with resistive and max. admissible capacitive load.

⁴ Source impedance according to prETS 300132-2, version 4.3.

⁵ Measured with a lead length of 0.1 m, leads twisted.

⁶ External capacitor required.

Inrush current

The inrush current has been kept as low as possible by choosing a very small input capacitance. A series resistor may be installed in the input line to further reduce this current.

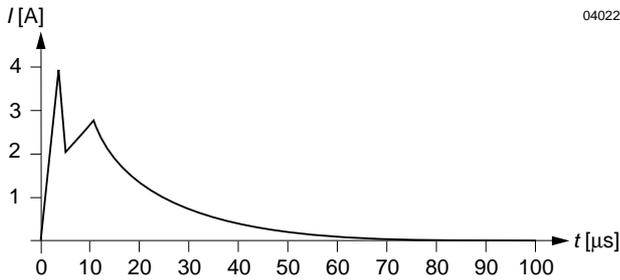


Fig. 4
Typical inrush current at $U_{i\text{ nom}}$, $P_{o\text{ nom}}$ versus time (40 IMX 35). Source impedance according to prETS 300132-2, version 4.3 at $U_{i\text{ nom}}$.

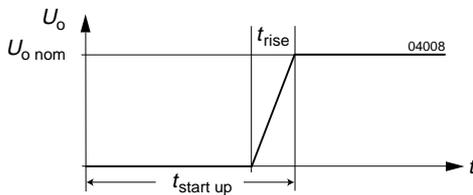


Fig. 5
Converter start-up and rise time

Reverse Polarity Protection

The built-in suppressor diode also provides for reverse polarity protection at the input by conducting current in the reverse direction. An external fuse is required to limit this current.

Table 3: Recommended external fuses

Converter type	Fuse type
20 IMX 35	F8.0A
40 IMX 35	F4.0A

Input Transient Voltage Protection

A built-in suppressor diode provides effective protection against input transients which may be caused for example by short-circuits across the input lines where the network inductance may cause high energy pulses.

Table 4: Built-in transient voltage suppressor

Type	Breakdown voltage $V_{Br\text{ nom}}$ [V]	Peak power at 1 ms P_p [W]	Peak pulse current I_{pp} [A]
20 IMX 35	50	1500	22
40 IMX 35	100	1500	9.7

For very high energy transients as for example to achieve IEC/EN 61000-4-5 or ETR 283 (19 Pf1) compliance (as per table: *Electromagnetic Immunity*) an external inductor and capacitor are required. The components should have similar characteristics as listed in table: *Components for external circuitry for IEC/EN 61000-4-5, level 2 or ETR 283 (19Pf1) compliance.*

Note: The suppressor diode D is only necessary for 20 IMX 35 types.

Table 5: Components for external circuitry for IEC/EN 61000-4-5, level 2 or ETR 283 (19Pf1) compliance.

Type	Inductor (L)	Capacitor (C)	Diode (D)
20 IMX 35	22 μ H/5A	470 μ F/40 V	1.5 k E47A
40 IMX 35	68 μ H/2.7 A	2 x 100 μ F/100 V	-

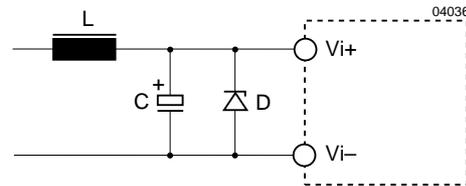


Fig. 6
Example for external circuitry to comply with IEC/EN 61000-4-5 or ETR 283 (19Pf1); the suppressor diode D is only necessary for 20 IMX 35 types.

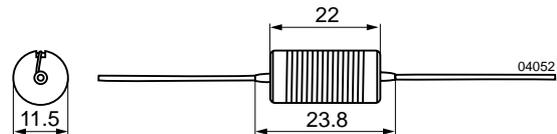


Fig. 7
Dimensions of inductor L for 20 IMX 35 and 40 IMX 35 types (e.g. Coil Craft, PCH-45 series).

Electrical Output Data

General conditions:

- $T_A = 25^\circ\text{C}$, unless T_C is specified
- Shutdown pin left open-circuit (not connected)
- Trim not connected

Table 6a: Output data for single (main) output.

Output			3.3 V			5.1 V			Unit
Characteristics	Conditions		min	typ	max	min	typ	max	
U_o	Output voltage	$U_{i \text{ nom}}, I_o = 0.5 I_{o \text{ nom}}$	3.28		3.32	5.07		5.13	V DC
$I_{o \text{ nom}}$	Output current	20 IMX	$U_{i \text{ min}} \dots U_{i \text{ max}}$			3.5			A
		40 IMX				4.25			
I_{o1L} I_{o2L}	Current limit ¹	20 IMX	$U_{i \text{ nom}}, T_C = 25^\circ\text{C}$ $U_{o1} = 93\% U_{o \text{ nom}}$			5.5			4.2
		40 IMX				6.1			
ΔU_{oU}	Line/load regulation	$U_{i \text{ min}} \dots U_{i \text{ max}}, I_o = (0.05 \dots 1) \cdot I_{o \text{ nom}}$	± 1			± 1			%
$u_{o1/2}$	Output voltage noise	$U_{i \text{ min}} \dots U_{i \text{ max}}$ $I_o = I_{o \text{ nom}}$	²			70			mV _{pp}
			³			40			
U_{oL}	Output overvoltage limit. ⁴		115		130	115		130	%
$C_{o \text{ ext}}$	Admissible capacitive load		4000			2700			μF
$u_{o \text{ d}}$	Dynamic load regulation	Voltage deviat.	$U_{i \text{ nom}}$			± 250			mV
t_d		Recovery time	$I_{o \text{ nom}} \leftrightarrow 1/2 I_{o \text{ nom}}$ IEC/EN 61204			1			ms
α_{Uo}	Temperature coefficient $\Delta U_o / \Delta T_C$	$U_{i \text{ min}} \dots U_{i \text{ max}}$ $I_o = 0.1 \dots 1 I_{o \text{ nom}}$	± 0.02			± 0.02			%/K

Table 6b: Output data for double output power trains.

Output			2 × 5 V			2 × 12 V			2 × 15 V			Unit
Characteristics	Conditions		min	typ	max	min	typ	max	min	typ	max	
U_{o1} U_{o2}	Output voltage	$U_{i \text{ nom}}$ $I_o = 0.5 I_{o \text{ nom}}$	4.95		5.05	11.88		12.12	14.85		15.15	V DC
$I_{o \text{ nom}}$	Output current	20 IMX	$U_{i \text{ min}} \dots U_{i \text{ max}}$			2 × 1.35			2 × 0.65			A
		40 IMX				2 × 1.4			2 × 0.70			
I_{oL}	Current limit ¹	20 IMX	$U_{i \text{ nom}}, T_C = 25^\circ\text{C}$ $U_o = 93\% U_{o \text{ nom}}$			3.5			1.8			1.5
		40 IMX				3.7			2.0			
ΔU_{oU}	Line regulation	$U_{i \text{ min}} \dots U_{i \text{ max}}, I_{o \text{ nom}}$	± 1			± 1			± 1			%
ΔU_{oI}	Load regulation	$U_{i \text{ nom}}$ $I_o = (0.1 \dots 1) I_{o \text{ nom}}$	± 3			± 3			± 3			
$u_{o1/2}$	Output voltage noise	$U_{i \text{ min}} \dots U_{i \text{ max}}$ $I_o = I_{o \text{ nom}}$	²			80			120			mV _{pp}
			³			40			60			
U_{oL}	Output overvoltage limit. ⁴	Min. load 1%	115		130	115		130	115		130	%
$C_{o \text{ ext}}$	Admissible capacitive load		4000			470			330			μF
$u_{o \text{ d}}$	Dynamic load regulation	Voltage deviat.	$U_{i \text{ nom}}$			± 250			± 400			mV
t_d		Recovery time	$I_{o \text{ nom}} \leftrightarrow 1/2 I_{o \text{ nom}}$			1			1			ms
α_{Uo}	Temperature coefficient $\Delta U_o / \Delta T_C$	$U_{i \text{ min}} \dots U_{i \text{ max}}$ $I_o = 0.1 \dots 1 I_{o \text{ nom}}$	± 0.02			± 0.02			± 0.02			%/K

¹ The current limit is primary side controlled. In the event of a sustained overload condition the thermal protection may cause the unit to shutdown (restart on cool-down).

² BW = 20 MHz

³ Measured with a probe according to EN 61204

⁴ The overvoltage protection is via a primary side second regulation loop, not tracking with Trim control.

Thermal Considerations

If a converter, mounted on a PCB, is located in free, quasi-stationary air (convection cooling) at the indicated maximum ambient temperature $T_{A \max}$ (see table: *Temperature specifications*) and is operated at its nominal input voltage and output power, the case temperature T_C measured at the *Measuring point of case temperature T_C* (see: *Mechanical Data*) will approach the indicated value $T_{C \max}$ after the warm-up phase. However, the relationship between T_A and T_C depends heavily on the conditions of operation and integration into a system. The thermal conditions are influenced by input voltage, output current, airflow, temperature of surrounding components and the surfaces and properties of the printed circuit board. $T_{A \max}$ is therefore only an indicative value and under practical operating conditions, the ambient temperature T_A may be higher or lower than this value.

Caution: The case temperature T_C measured at the: *Measuring point of case temperature T_C* (see: *Mechanical Data*) may under no circumstances exceed the specified maximum value. The installer must ensure that under all operating conditions T_C remains within the limits stated in the table: *Temperature specifications*.

Temperature Range

Full output power from $-40 \dots 71^\circ\text{C}$. Above 71°C the output power derating below should be observed. The modules will provide the specified output power with free air convection cooling.

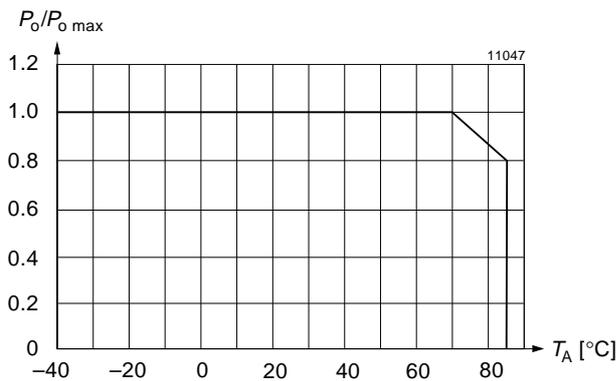


Fig. 8
Maximum allowed output power versus ambient temperature.

Short Circuit Behaviour

The current limit characteristic shuts down the converter whenever a short circuit is applied to an output. It acts self-protecting and automatically recovers after removal of the overload condition (hiccup mode).

Overtemperature Protection

The converter is protected against possible overheating by means of an internal temperature monitoring circuit. It shuts down the unit above the internal temperature limit and attempts to automatically restart. This feature prevents from excessive internal temperature which could occur under heavy overload conditions.

Connection in Series

The outputs of one or several single or double output power trains may be connected in series without any precautions.

Connection in Parallel

Several outputs of the same converter with equal output voltage (e.g. 5V / 5V) can be put in parallel and will share their output currents almost equally.

Parallel operation of double outputs of several converters with the same output voltage may cause start-up problems at initial start-up. This is only advisable in applications where one converter is able to deliver the full load current as e.g. required in true redundant systems.

The first outputs (5.1V or 3.3 V) of triple output units should not be paralleled, except in true redundant systems using decoupling diodes

Output Overvoltage Protection

The outputs of the converter are protected against overvoltages by a second control loop. In the event of an overvoltage on one of the outputs the unit will shut down and attempt to restart in short intervals. The main purpose of this feature is to protect against possible overvoltages which could occur due to a failure in the feedback control circuit. The overvoltage protection is not designed to withstand externally applied overvoltages.

Typical Performance Curves

General conditions:

- $T_A = 25^\circ\text{C}$, unless T_C is specified.
- Shut down pin left open circuit.
- Trim input not connected.

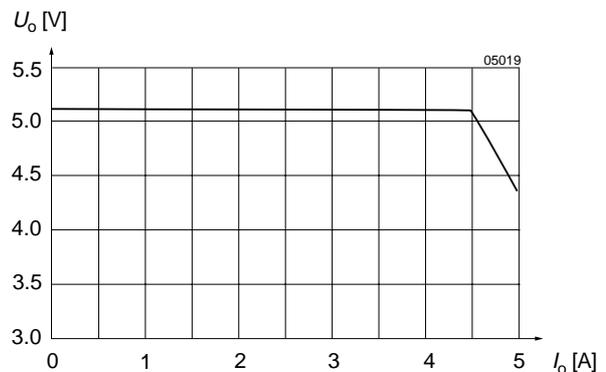


Fig. 9 a
 U_o versus I_o (typ) of units with $U_o = 5.1 \text{ V}$.
(40 IMX 35-05D12-8).

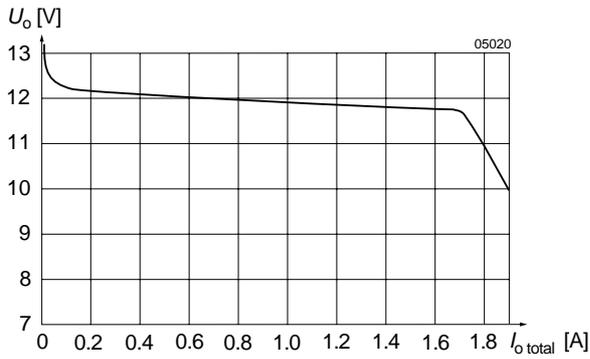


Fig. 9 b
 $U_{o1/2}$ versus $I_{o1/2}$ of double output power trains (i.e. 2×12 V). See: Block diagram 1

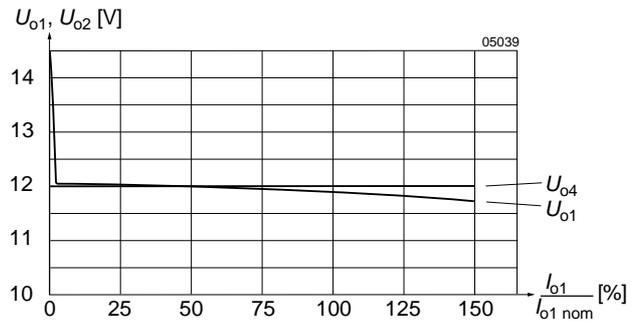


Fig. 11
 Flexible load distribution on power train 1 of 40 IMX 35 D12D12-8 (4×12 V) with load variation from 0...150% of $P_{o\ nom}$ on output V_{o1} with V_{o4} loaded with 50% of $P_{o4\ nom}$.

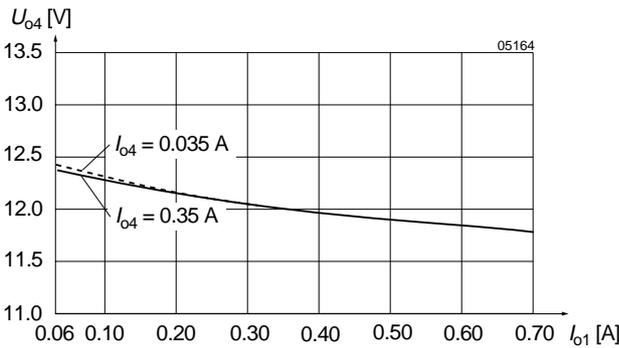


Fig. 10
 Cross load regulation U_{o4} versus I_{o1} (typ) for various I_{o4} for V_{o1} , V_{o4} on power train 1. See: Block diagram double output types. (20 IMX 35 D12D12-8)

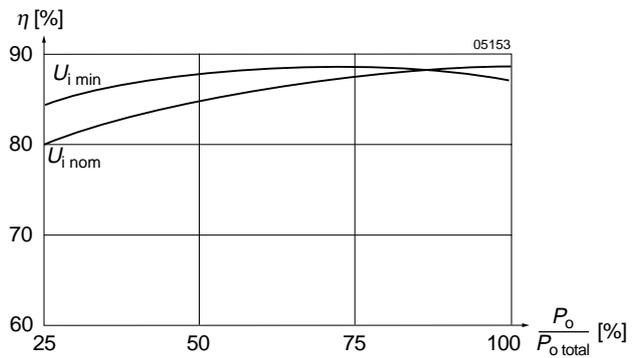


Fig. 13
 Efficiency versus input voltage and load. Typical values 20 IMX 35 D12D12-8

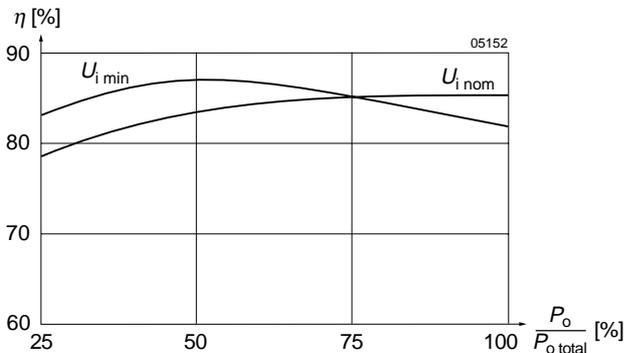


Fig. 12
 Efficiency versus input voltage and load. Typical values 40 IMX 35 D12D12-8

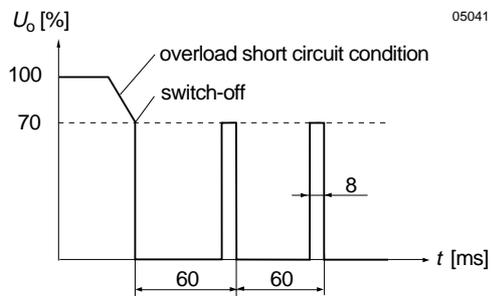


Fig. 14
 Overload switch off (hiccup mode), approximate values.

Auxiliary Functions

Adjustable Output Voltage

As a standard feature, the IMX 35 offer adjustable output voltages in the range 80...105% of $U_{o\ nom}$ by use of a control pin. The Trim control is offered either on primary or secondary side of the converter depending on type.

The double output units IMX 35-05-05, IMX 35-12-12 and IMX 35-15-15 have a Trim input connected to pin 5. This input influences both outputs simultaneously. Both power trains have passive transformer feedback and the Trim input (pin 5) is referenced to the primary side. Fig. 16 shows the circuit topology. Adjustment of the output voltage is possible by means of either an external resistor R_{ext} in the range of 100...105% of $U_{o\ nom}$ (table 10) or in the range of 80...105% of $U_{o\ nom}$ by means of an external voltage source (table 11).

The IMX 35 triple output units feature a first power train with magnetic feedback. The simplified circuit is shown in Fig. 15. The Trim1 (pin 18) is secondary referenced and influences only the first power train. Adjustment of the output voltage is possible by means of an external resistor R_{ext} between the Trim1 and either Vo1+ or Vo1-. If the Trim1 input is left open-circuit, the output voltage is set to $U_{o1\ nom}$. Table 9 states typical values required to program the output

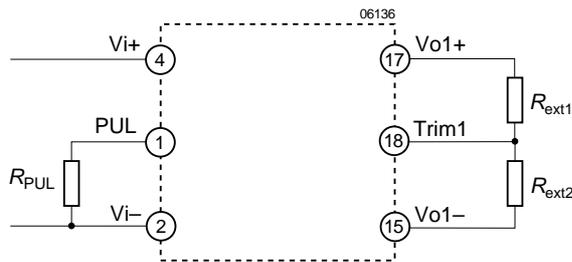


Fig. 15 Input undervoltage lockout adjustment (PUL) and output voltage adjustment by use of the Trim1 input referenced to the secondary side (triple output units).

Table 9: U_{o1} versus R_{ext} for $U_{o1} = 80...105\% U_{o\ nom}$; typical values ($U_{i\ nom}, I_{o1/2} = 0.5 I_{o1/2\ nom}$); triple output units

$U_{o\ nom}$ [V]	R_{ext1}		R_{ext2}	
	U_{o1} [V]	[k Ω]	U_{o1} [V]	[k Ω]
3.3	2.8	0.75	3.3	∞
	2.97	1.8	3.4	5.6
	3.135	4.7	3.46	3.3
5.1	5.0	33	5.1	∞
	4.84	9.1	5.36	3
	4.59	2.2	5.25	8.5

voltage U_{o1} to approximately the values as indicated.

The quad output units are shown in block diagram 3. All types with equal output voltage have the Trim function connected to pin 5 referenced to the primary side which influences all outputs simultaneously. The schematics are shown in fig. 16, the values of the adjust resistor R_{ext} in Table 10 and the external voltage source in Table 11.

The quad output unit with unequal output voltages have the Trim1 input (pin 5) referenced to the primary side influencing only the output of the first power train (U_{o1}, U_{o4}).

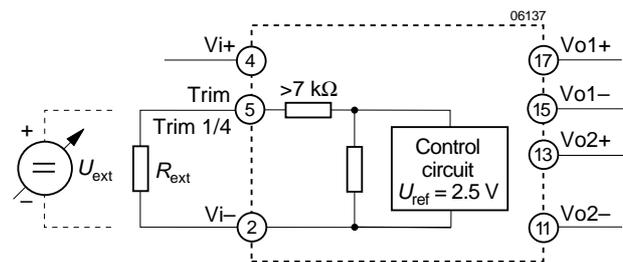


Fig. 16 Output voltage control for double and quad output units by means of the Trim input on the primary side.

a) Adjustment by means of an external resistor R_{ext} :

Adjustment of the output voltage by means of an external resistor R_{ext} is possible within the range of 100...105% of $U_{o\ nom}$. R_{ext} should be connected between the Trim pin 5 and Vi-. Connection of R_{ext} to Vi+ may damage the converter. Table 10 indicates suitable resistor values for typical output voltages under nominal conditions ($U_{i\ nom}, I_o = 0.5 I_{o\ nom}$).

Table 10: R_{ext1} for $U_o > U_{o\ nom}$; approximate values ($U_{i\ nom}, I_o = 0.5 I_{o\ nom}$)

U_o [% $U_{o\ nom}$]	R_{ext}	
	Trim [k Ω]	Trim1/ 4 [k Ω]
105...108 (107 typically)	0	0
105	2.0	4.3
104	4.2	9.0
103	8.2	18
102	16	33
101	47	91
100	∞	∞

b) Adjustment by means of an external voltage source U_{ext} (Fig. 16):

For external output voltage adjustment in the range 80...105% of $U_{o\ nom}$ a (0...15 V) source U_{ext} is required, connected to the Trim pin 5 and Vi-. Table 11 below indicates typical U_o versus U_{ext} values. Applying a control voltage greater 15 V will set the converter into a hiccup mode. Direct paralleling of the Trim pins of units of the same type connected in parallel is feasible. (Input resistor of the Trim input is $>7\ k\Omega$)

Table 11: U_o versus U_{ext} for $U_o = 80...105\% U_{o\ nom}$; typical values ($U_{i\ nom}, I_o = 0.5 I_{o\ nom}$)

U_o [% $U_{o\ nom}$]	U_{ext}	
	Trim [V]	Trim1/ 4 [V]
≥ 105	0	0
102	1.6	1.5
100	2.5	2.5
95	4.25	4.25
85	8.45	8.25
80	10.5	10.2

Shut Down Function

The outputs of the converters may be enabled or disabled by means of a logic signal (TTL, CMOS, etc.) applied to the shut down pin. If the shut down function is not required then it should be left open-circuit.

Converter operating: 2.0...20 V

Converter shut down: -10...0.7 V

Programmable Input Undervoltage Lockout PUL

A special feature of these units is the accurate undervoltage lockout function which protects the units (and the system) from large currents caused by operation at low voltages. This ensures easier start-up in distributed power systems.

Table 7: Turn on and turn off voltage

Type	Trigger level	Hysteresis	Units
20 IMX 35	7...8	≤0.5	V
40 IMX 35	14...15.5	≤1	

See: *Electrical input data* for a description of the turn on turn off voltage levels of the various types.

The under voltage lockout levels may be programmed by use of an external resistor to pull up the preset level as indicated in table 8. (see: *Fig. 15*).

Table 8: Typical values for R_{ext} and the respective lockout voltage for input voltage.

20 IMX 35		40 IMX 35	
R_{PUL} [kΩ]	$U_{i min}$ [V]	R_{PUL} [kΩ]	$U_{i min}$ [V]
∞	≤8	∞	≤15.5
39	10	43	22
19	12	16	26
13	14	10	28
9.1	16	0	32

Synchronisation (W)

This logic input can be used to synchronise the oscillator to an external frequency source. The input is edge triggered with TTL thresholds, and requires a source frequency of 490...520 kHz (duty cycle 10...90%). The external source frequency is internally divided by 2 to define the switching frequency of the converter. If unused, this pin can be connected to V1- (pin 2) or left open-circuit.

Reference (Ref)

The signal output provides a stable 5 V (± 0.1 V) reference signal on pin Ref. It is protected by a 1 kΩ resistor. This signal may be used also in conjunction with the Trim input pin 5 (primary side) as a limited external voltage reference. Then we recommend to connect a filter capacitor (0.1 μF) between Ref and Vi-.

Electromagnetic Compatibility (EMC)

A suppressor diode together with an input filter form an effective protection against high input transient voltages

which typically occur in many installations, but especially in battery driven mobile applications.

Electromagnetic Immunity

Table 12: Immunity type tests

Phenomenon	Standard ¹	Class Level	Coupling mode ²	Value applied	Waveform	Source Imped.	Test procedure	In oper.	Per- ³ form.
Electrostatic discharge to case	IEC/EN 61000-4-2	2	contact discharge (R pin open)	4000 V _p	1/50 ns	330 Ω	10 positive and 10 negative discharges	yes	B
		3	air discharge (R pin open)	8000 V _p					
Electromagnetic field	IEC/EN 61000-4-3	3	antenna	10 V/m	AM 80% 1 kHz		26...1000 MHz	yes	A
	ENV 50204				PM, 50% duty cycle, 200 Hz resp. frequ.		900 MHz		
Electrical fast transient/burst	IEC/EN 61000-4-4	4	direct +i/-i	4000 V _p	bursts of 5/50 ns 5 kHz rep. rate transients with 15 ms burst duration and a 300 ms period	50 Ω	1 min positive 1 min negative transients per coupling mode	yes	B
Surge	IEC/EN 61000-4-5 ⁵	3	+i/-i	2000 V _p	1.2/50 μs	2 Ω	5 pos. and 5 neg. impulses per coupling mode	yes	B
				EN 50155	D		1800 V		
				8400 V	0.05/01 μs			yes	B
Conducted disturbances	IEC/EN 61000-4-6	3	+i/-i	10 V _{rms} (140 dBμV)	AM modulated 80%, 1 kHz	50 Ω	0.15...80 MHz 150 Ω	yes	A

¹ Related and previous standards are referenced in: *Technical Information: Standards*.

² i = input, o = output.

³ A = normal operation, no deviation from specification, B = temporary deviation from specs. possible.

⁴ For 40 IMX 35 types (additional external components required). Not applicable for 20 IMX 35 types.

⁵ External components required.

Electromagnetic Emission

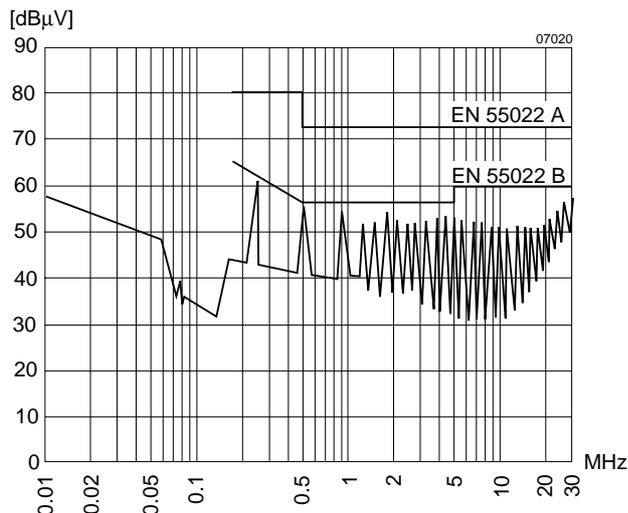


Fig. 17

Typical disturbance voltage (quasi-peak) at the input according to CISPR 11/EN 55011 and CISPR 22/EN 55022, measured at $U_{i\text{ nom}}$ and $I_{o\text{ nom}}$. Output leads 0.1 m, twisted. (40 IMX 35-D12D12-9)

CISPR 22/EN 55022, Level B Radiated

Electromagnetic emission requirements according to EN 55022, class B (radiated) can be achieved by adding an external common mode choke and (for 20 IMX 35 types) an additional capacitor, see: *Input Data*. The filter components should be placed as close as possible to the input of the converter.

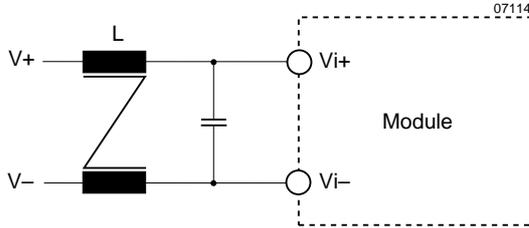


Fig. 18
Example for external circuitry to comply with CISPR22/EN 55022, level B, radiated

Table 13: Input filter components for EN 55022, level B, radiated.

Type	Current compensated choke
20 IMX 35	Murata PLH 10A 7003R6P02
40 IMX 35	Murata PLH 10A 1112R6P02

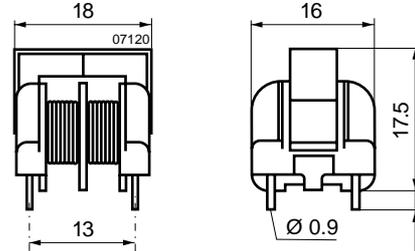


Fig. 19
Choke dimensions

Immunity to Environmental Conditions

Table 14: Temperature specifications, valid for air pressure of 800...1200 hPa (800...1200 mbar)

Temperature		-8 ³		Unit
Characteristics	Conditions	min	max	
T _A	Ambient temperature ¹	Operational ²	-40	°C
T _C	Case temperature		-40	
T _S	Storage temperature ¹	Non operational	-55	

¹ MIL-STD-810D section 501.2 and 502.2

² See: *Thermal Considerations*

³ Start up at -55°C

Table 15: MTBF and device hours

MTBF	Ground Benign	Ground Fixed		Ground Mobile
MTBF acc. to MIL-HDBK-217F	T _C = 40°C	T _C = 40°C	T _C = 70°C	T _C = 50°C
40 IMX 35-05D12-8	336'000 h	141'000 h	86'000 h	110'000 h

Table 16: Environmental testing

Test Method		Standard	Test Conditions	Status
Ca	Damp heat steady state	IEC/DIN IEC 60068-2-3 MIL-STD-810D section 507.2	Temperature: 40 ±2 °C Relative humidity: 93 +2/-3 % Duration: 56 days	Unit not operating
Ea	Shock (half-sinusoidal)	IEC/EN/DIN EN 60068-2-27 MIL-STD-810D section 516.3	Acceleration amplitude: 100 g _n = 981 m/s ² Bump duration: 6 ms Number of bumps: 18 (3 each direction)	Unit operating
Eb	Bump (half-sinusoidal)	IEC/EN/DIN EN 60068-2-29 MIL-STD-810D section 516.3	Acceleration amplitude: 40 g _n = 392 m/s ² Bump duration: 6 ms Number of bumps: 6000 (1000 each direction)	Unit operating
Fc	Vibration (sinusoidal)	IEC/EN/DIN EN 60068-2-6	Acceleration amplitude: 0.35 mm (10...60 Hz) 5 g _n = 49 m/s ² (60...2000 Hz) Frequency (1 Oct/min): 10...2000 Hz Test duration: 7.5 h (2.5 h each axis)	Unit operating
Fh	Vibration broad-band random (digital control)	IEC/EN 60068-2-64 MIL-STD-810D section 514.3	Acceleration spectral density: 0.05 g _n ² /Hz Frequency band: 20...500 Hz Acceleration magnitude: 4.9 g _{n rms} Test duration: 3 h (1 h each axis)	Unit operating
Kb	Salt mist, cyclic (sodium chloride NaCl solution)	IEC/EN/DIN IEC 60068-2-52	Concentration: 5% (30°C) Duration: 2 h per cycle Storage: 40°C, 93% rel. humidity Storage duration: 22 h per cycle Number of cycles: 3	Unit not operating

Mechanical Data

Dimensions in mm. Tolerances ± 0.3 mm unless otherwise indicated.

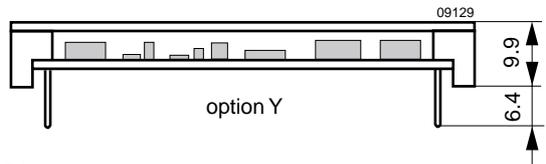
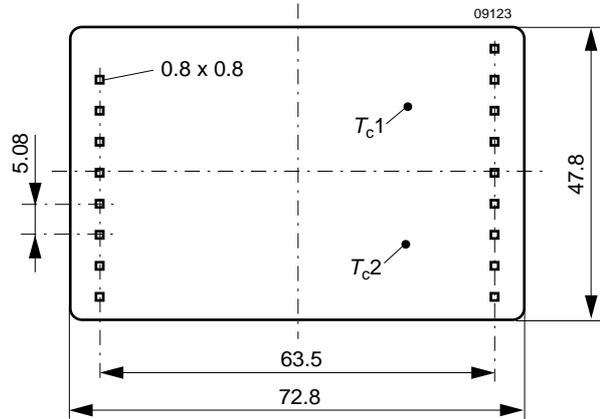
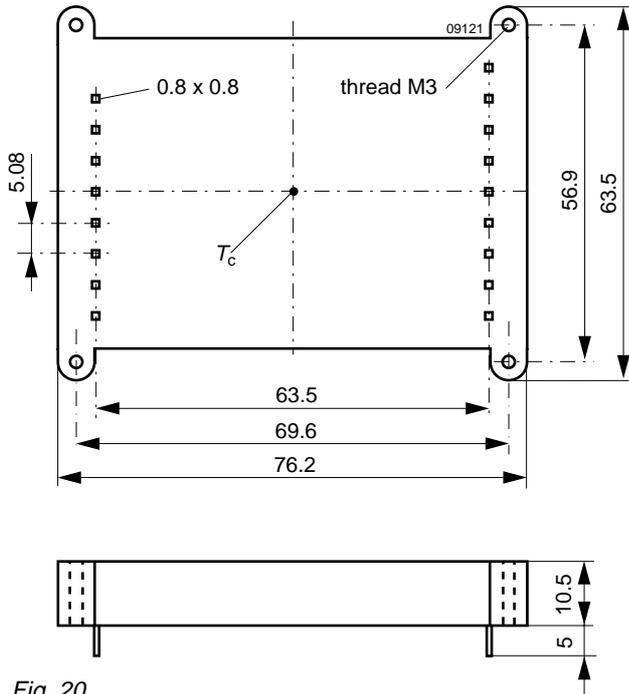


Fig. 20
Case IMX 35 (Standard)
Weight: approx. 70 g

Fig. 21
IMX 35 open frame (option Z) and 20 IMX 35 triple output, open frame with base plate (option Y)

Safety and Installation Instructions

Installation Instructions

Installation of the DC-DC converters must strictly follow the national safety regulations in compliance with the enclosure, mounting, creepage, clearance, casualty, markings and segregation requirements of the end-use application.

Connection to the system shall be made via a printed circuit board with hole diameters of 1.5 mm for the pins.

The units should be connected to a secondary circuit.

Check for hazardous voltages before altering any connections.

Do not open the module.

Ensure that a unit failure (e.g. by an internal short-circuit) does not result in a hazardous condition. See also: *Safety of operator accessible output circuit*.

Input Fuse

To prevent excessive current flowing through the input supply line in case of a short-circuit across the converter input an external fuse should be installed in a non earthed input supply line. We recommend a fast acting fuse F8.0A for 20 IMX 35 types, F4.8 A for 40 IMX 35 types.

Standards and approvals

All DC-DC converters are pending to be UL recognized according to UL 69950, UL recognized for Canada to CAN/CSA C22.2 No. 950-95 and IEC/EN 60950 standards.

The units have been evaluated for:

- Building in
- Supplementary insulation input to output, based on their maximum input voltage
- The use in a pollution degree 2 environment
- Connecting the input to a secondary circuit which is subject to a maximum transient rating of 1500 V.

After approvals the DC-DC converters are subject to manufacturing surveillance in accordance with the above mentioned UL, CSA, EN and with ISO 9001 standards.

Isolation

The electric strength test is performed as factory test in accordance with IEC/EN 60950 and UL 1950 and should not be repeated in the field. Power-One will not honour any guarantee claims resulting from electric strength field tests.

Table 17: Electric strength test voltages

Characteristic	Input to output IMX 35	Output to output	Unit
Electric strength test voltage 1 s	1.2	-	kV _{rms}
	1.5	0.2	kV DC
Insulation resistance at 500 V DC	>100	-	MΩ
Partial discharge extinction voltage	Consult factory	-	kV

Table 18: Pin allocation

Pin No.	Double output	Triple output	Quad output
1	PUL	PUL	PUL
2	Vi-	Vi-	Vi-
3	n.c.	n.c.	n.c.
4	Vi+	Vi+	Vi+
5	Trim	n.c.	Trim or Trim1/4
6	W	W	W
7	Ref	Ref	Ref
8	\overline{SD} or i	\overline{SD} or i	\overline{SD} or i
11	Vo2-	Vo3-	Vo3-
12	n.c.	Vo3+	Vo3+
13	Vo2+	Vo2+	Vo2+
14	n.c.	Vo2-	Vo2-
15	Vo1-	Vo1-	Vo1-
16	n.c.	n.c.	Vo1+
17	Vo1+	Vo1+	Vo4+
18	n.c.	Trim1	Vo4-
19	n.c.	n.c.	n.c.

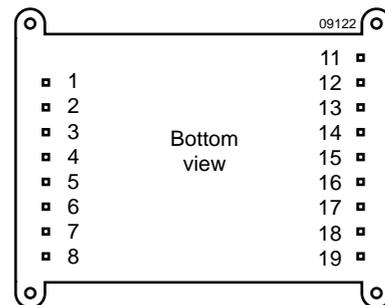


Fig. 22
Pin allocation

Protection Degree

The protection degree of the DC-DC converters is IP 30 (not for option Z).

Cleaning Agents

In order to avoid possible damage, any penetration of cleaning fluids should be prevented, since the power supplies are not hermetically sealed.

Notwithstanding this, units with opt. Z leaving the factory unlacquered may be cleaned and lacquered by the customer.

Safety of operator accessible output circuit

If the output circuit of a DC-DC converter is operator accessible, it shall be an SELV circuit according to the IEC/EN 60950 related safety standards

The following table shows some possible installation configurations, compliance with which causes the output circuit of the DC-DC converter to be an SELV circuit according to

IEC/EN 60950 up to a configured output voltage (sum of nominal voltages if in series or +/- configuration) of 42 V.

However, it is the sole responsibility of the installer to ensure the compliance with the relevant and applicable safety regulations. More information is given in: *Technical Information: Safety*.

Table 19: Insulation concept leading to an SELV output circuit

Conditions	Front end			DC-DC converter		Result
	Minimum required grade of isolation, to be provided by the AC-DC front end, including mains supplied battery charger	Maximum DC output voltage from the front end ¹	Minimum required safety status of the front end output circuit	Type	Measures to achieve the specified safety status of the output circuit	
Mains ≤250 V AC	Basic	≤60 V	Earthed SELV circuit ²	IMX 35	Operational insulation (provided by the DC-DC converter)	SELV circuit
		≤75 V	Hazardous voltage secondary circuit	IMX 35	Input fuse ³ output suppressor diodes ⁴ , and earthed output circuit ²	Earthed SELV circuit
	Double or reinforced	≤60 V	SELV circuit	IMX 35	Operational insulation (provided by the DC-DC converter)	
		≤75 V	Double or reinforced insulated unearthed hazardous voltage secondary circuit ⁵	IMX 35	Supplementary insulation based on the maximum rated output voltage from the front end (provided by the DC-DC converter)	

¹ The front end output voltage should match the specified input voltage range of the DC-DC converter.

² The earth connection has to be provided by the installer according to the relevant safety standard, e.g. IEC/EN 60950.

³ The installer shall provide an approved fuse (type with the lowest rating suitable for the application) in a non-earthed input conductor directly at the input of the DC-DC converter (see fig.: *Schematic safety concept*). For UL's purpose, the fuse needs to be UL-listed. See also: *Input Fuse*.

⁴ Each suppressor diode should be dimensioned in such a way, that in the case of an insulation fault the diode is able to limit the output voltage to SELV (<60 V) until the input fuse blows (see fig.: *Schematic safety concept*).

⁵ Has to be insulated from earth by at least basic insulation according to the relevant safety standard, based on the maximum output voltage from the front end.

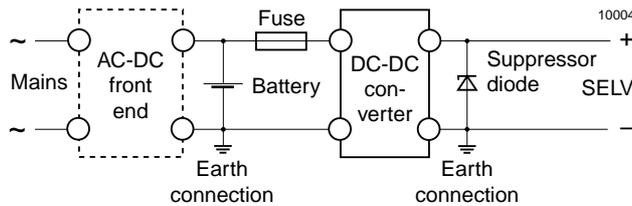


Fig. 23
Schematic safety concept. Use fuse, suppressor diode and earth connection as per table: Safety concept leading to an SELV output circuit.

Description of Options

Table 20: Survey of options

Option	Function of option	Types
Y	Base-plated open frame	20 IMX 35 triple output types only
Z	Open frame	All models except 20 IMX 35 triple output types
i	Inhibit	-

Option i

Inhibit

The output of the converter may be enabled or disabled by means of a logic signal (TTL, CMOS, etc.) applied to the inhibit pin. No output voltage overshoot will occur when the unit is turned on. If the inhibit function is not required the inhibit (pin 8) should be connected to V_{i-} to enable the output (active low logic, fail safe).

Converter operating: $-10\text{ V} \dots 0.8\text{ V}$

Converter inhibited

or inhibit pin left open circuit: $2.4\text{ V} \dots U_{i\text{ max}}$

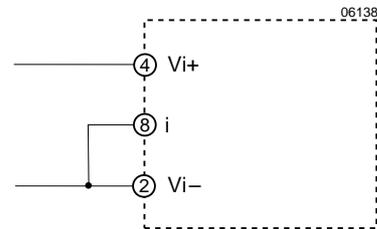


Fig. 25

If the inhibit is not used, the inhibit pin should be connected to V_{i-}