



Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire.
Propriete de ©BERG ELECTRONICS. Droits de reproduction BERG ELECTRONICS INC.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of ©BERG ELECTRONICS Copyright BERG ELECTRONICS INC.

PCMCIA COMPONENTS:
DOUBLE DECK ASSEMBLY
EXTENDED TRAVEL (8mm CARD EJECT) MECHANISM

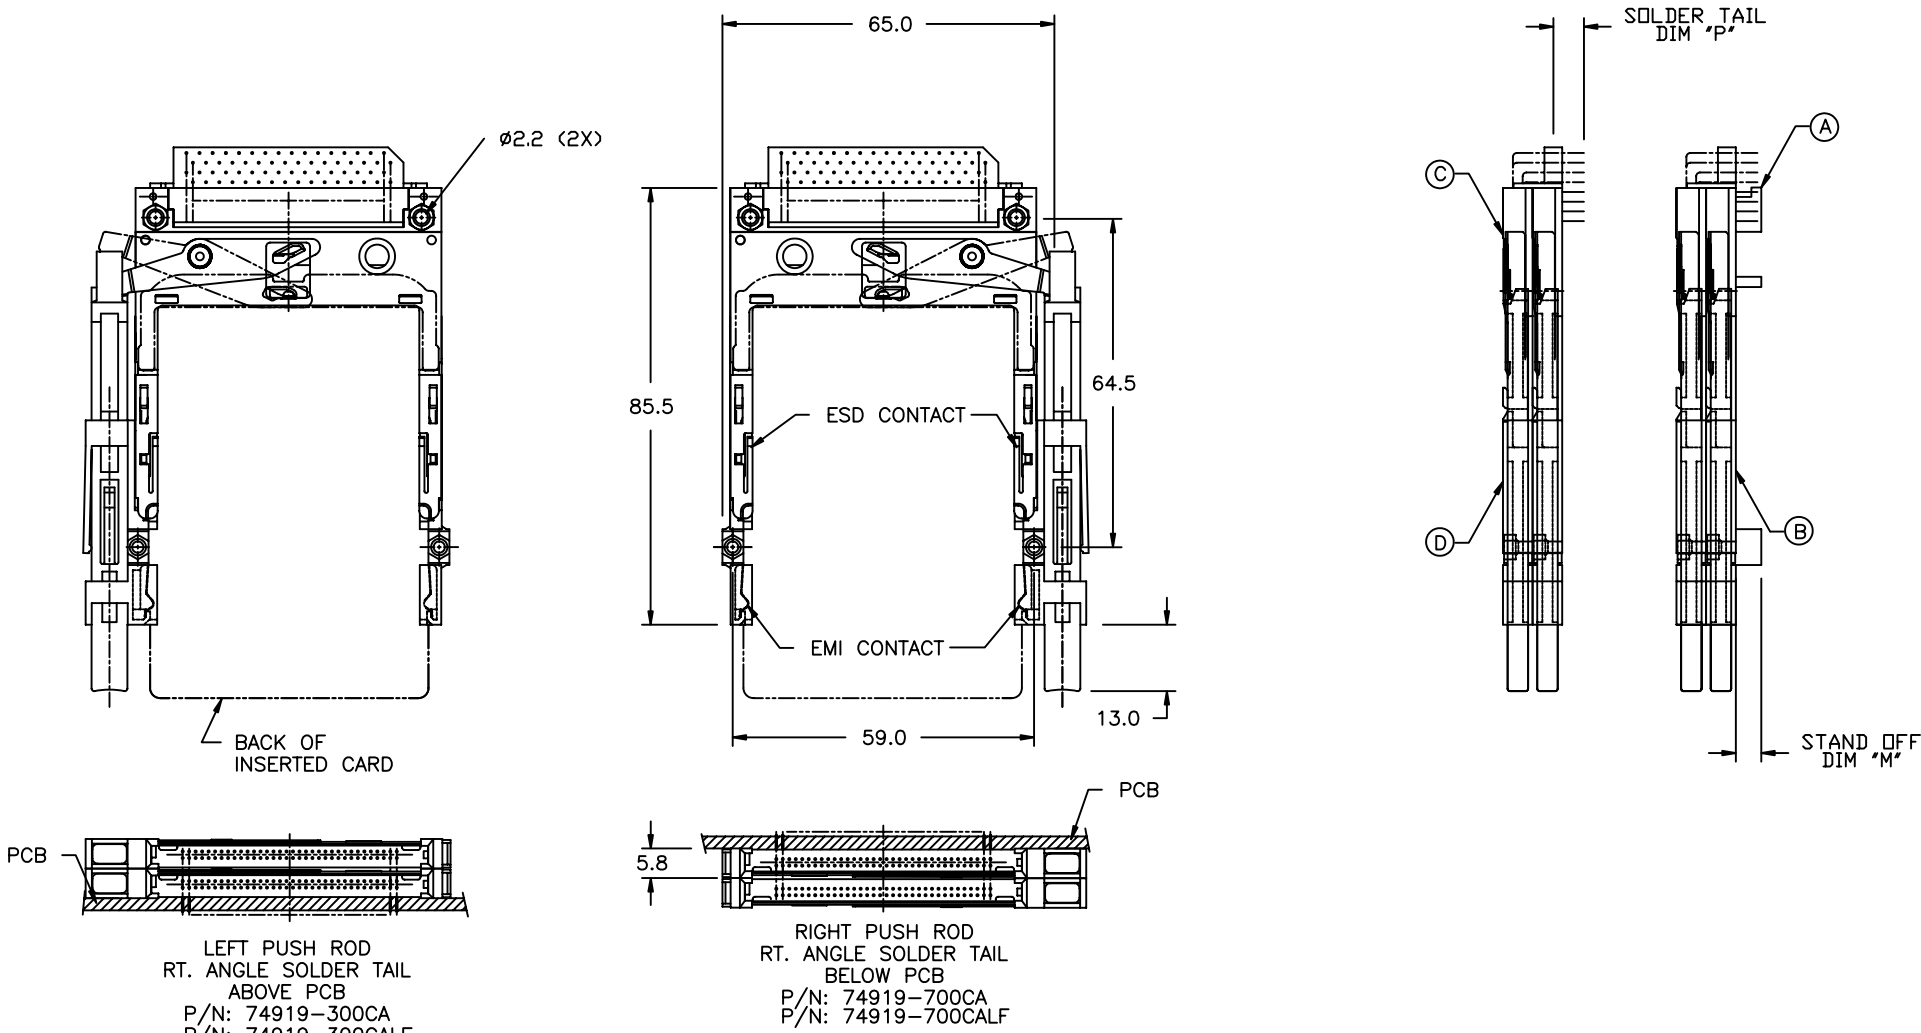

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com			
ltr	ecn no	dr	date	linear	.X ±.3			projection 	title 68 POS EJECT HEADER ASSY			
A	V80794	RHG	7/28/98		.XX ±.13							
B	V81799	CGC	10/27/98		.XXX ±.051							
C	N05-0198	WB	07/05/05	angles	0° ±2°				product family MCS size dwg no A4 74919			
				dr	R.GRAPE	7/28/98	scale 1/1					code -
				enrg	D.BRANN	7/28/98						
				chr	D.BRANN	7/28/98						
				appd	D.BRANN	7/28/98			sheet 1 of 3			
sheet index	revision sheet	C 1	C 2	C 3								



DESCRIPTION: ABOVE AND BELOW P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEW BY USER.

PRODUCT NO. 74919-XXXX	STAND OFF DIM "M" (mm)	UPPER DECK			LOWER DECK			DIM "P" (mm)	HDR COLOR	MOUNTING STYLE TO PCB & PUSH ROD SIDE
		ASSEMBLY 74443- XXXX	MECHANISM 94613- XXXX ④	HEADER 92140- XXX ③	ASSEMBLY 74443- XXXX	MECHANISM 94613- XXXX ⑥	HEADER 92140- XXX ⑤			
000CA	0	005CA	00CA	005	100CA	10CA	000	2.8	BLACK	
020CA	2	025CA	00CA	045	120CA	12CA	040	2.5	BLACK	
100CA	0	105CA	10CA	005	000CA	00CA	000	2.8	BLACK	
120CA	2	125CA	10CA	045	020CA	02CA	040	2.5	BLACK	
200CA	0	005CA	00CA	005	000CA	00CA	000	2.8	BLACK	
220CA	2	025CA	00CA	045	020CA	02CA	040	2.5	BLACK	
300CA	0	105CA	10CA	005	100CA	10CA	000	2.8	BLACK	
320CA	2	125CA	10CA	045	120CA	12CA	040	2.5	BLACK	
500CA	0	605CA	00CA	505	500CA	10CA	500	2.8	NATURAL	
520CA	2	625CA	00CA	545	520CA	12CA	540	2.5	NATURAL	
600CA	0	505CA	10CA	505	600CA	00CA	500	2.8	NATURAL	
620CA	2	525CA	10CA	545	620CA	02CA	540	2.5	NATURAL	
700CA	0	505CA	10CA	505	500CA	10CA	500	2.8	NATURAL	
720CA	2	525CA	10CA	545	520CA	12CA	540	2.5	NATURAL	
800CA	0	605CA	00CA	505	600CA	00CA	500	2.8	NATURAL	
820CA	2	625CA	00CA	545	620CA	02CA	540	2.5	NATURAL	

NOTES:

1. REFER TO HEADER DRAWING 92140 AND EJECT MECHANISM 94613 FOR ADDITIONAL DIMENSIONS, MATERIAL, AND PLATING INFORMATION.
2. REFER TO TA-946 FOR PCB LAYOUT AND PCB KEEP-OUT AREA.
3. RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs).
RECOMMENDED HOLD-DOWN: 2mm SCREWS AND NUTS.
SEE DRAWINGS 95121 AND 92869.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ±.3		projection 	title 68 POS EJECT HEADER ASSY
c					.XX ±.13			
					.XXX ±.051			
				angles	0° ±2°		mm ←→ scale 1/1	product family size A4 MCS 74919 code - sheet 2 of
				dr	R.GRAPE	7/28/98		
				engr	D.BRANN	7/28/98		
				chr	D.BRANN	7/28/98		
				appd	D.BRANN	7/28/98		
sheet index	revision sheet							



DESCRIPTION: ABOVE AND BELOW P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEW BY USER.

PRODUCT NO. 74919-XXXX	STAND OFF DIM "M" (mm)	UPPER DECK			LOWER DECK			DIM "P" (mm)	HDR COLOR	MOUNTING STYLE TO PCB & PUSH ROD SIDE
		ASSEMBLY 74443- XXXX	MECHANISM 94613- XXXX ④	HEADER 92140- XXX ③	ASSEMBLY 74443- XXXX	MECHANISM 94613- XXXX ⑥	HEADER 92140- XXX ⑤			
000CALF	0	005CALF	00CA	005LF	100CALF	10CA	000LF	2.8	BLACK	
020CALF	2	025CALF	00CA	045LF	120CALF	12CA	040LF	2.5	BLACK	
100CALF	0	105CALF	10CA	005LF	000CALF	00CA	000LF	2.8	BLACK	
120CALF	2	125CALF	10CA	045LF	020CALF	02CA	040LF	2.5	BLACK	
200CALF	0	005CALF	00CA	005LF	000CALF	00CA	000LF	2.8	BLACK	
220CALF	2	025CALF	00CA	045LF	020CALF	02CA	040LF	2.5	BLACK	
300CALF	0	105CALF	10CA	005LF	100CALF	10CA	000LF	2.8	BLACK	
320CALF	2	125CALF	10CA	045LF	120CALF	12CA	040LF	2.5	BLACK	
500CALF	0	605CALF	00CA	505LF	500CALF	10CA	500LF	2.8	NATURAL	
520CALF	2	625CALF	00CA	545LF	520CALF	12CA	540LF	2.5	NATURAL	
600CALF	0	505CALF	10CA	505LF	600CALF	00CA	500LF	2.8	NATURAL	
620CALF	2	525CALF	10CA	545LF	620CALF	02CA	540LF	2.5	NATURAL	
700CALF	0	505CALF	10CA	505LF	500CALF	10CA	500LF	2.8	NATURAL	
720CALF	2	525CALF	10CA	545LF	520CALF	12CA	540LF	2.5	NATURAL	
800CALF	0	605CALF	00CA	505LF	600CALF	00CA	500LF	2.8	NATURAL	
820CALF	2	625CALF	00CA	545LF	620CALF	02CA	540LF	2.5	NATURAL	

NOTES:

1. REFER TO HEADER DRAWING 92140 AND EJECT MECHANISM 94613 FOR ADDITIONAL DIMENSIONS, MATERIAL, AND PLATING INFORMATION.
2. REFER TO TA-946 FOR PCB LAYOUT AND PCB KEEP-OUT AREA.
3. RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs). RECOMMENDED HOLD-DOWN: 2mm SCREWS AND NUTS. SEE DRAWINGS 95121 AND 92869.
4. IF LEAD FREE P/N.THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
5. IF LEAD FREE P/N.THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
6. LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		www.fciconnect.com			
ltr	ecn no	dr	date	linear	.X ±.3			projection		title			
c					.XX ±.13					68 POS EJECT HEADER ASSY			
					.XXX ±.051								
				angles	0° ±2°			mm		product family MCS		code	
				dr	R.GRAPE	7/28/98	size			dwg no		-	
				enrg	D.BRANN	7/28/98	A4			74919		sheet	
				chr	D.BRANN	7/28/98	1/1					3 of	
				apdd	D.BRANN	7/28/98							
sheet index	revision sheet												