


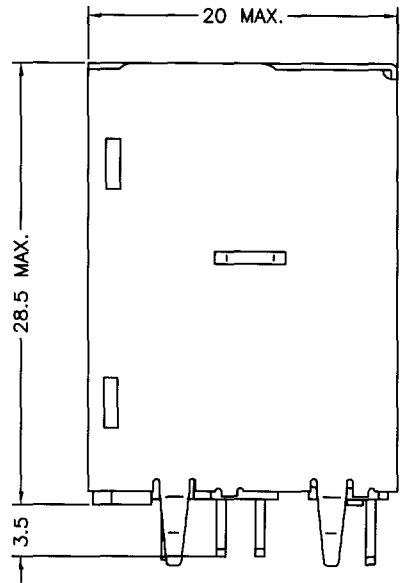


MINI DIN CONNECTORS (Dual Type)

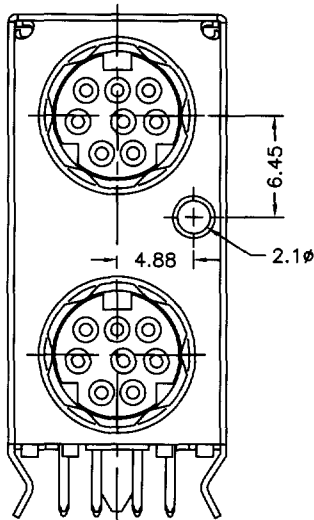

Rating: 1A 100V AC
3A 12V DC
Insulation Resistance: 50MΩ MIN.
Dielectric strength: 250V AC/1 minute
Contact Resistance: 30mΩ MAX.

2MJ-2526U110 SERIES

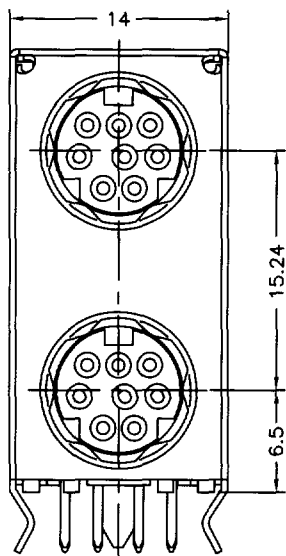

W/ SCREW HOLD

ARRANGEMENT OF CONTACTS							
NO OF CONTACTS		3	4	5	6	7	8
MODEL NO	W/O SCREW HOLE		2MJ-2522U110	2MJ-2523U110	2MJ-2524U110		2MJ-2526U110
	W/I SCREW HOLE		2MJ-2522U119	2MJ-2523U119	2MJ-2524U119		2MJ-2526U119
PCB LAYOUT (BOTTOM VIEW)							
		□: PLEASE CONSULT US FOR AVAILABILITY OR OEM.					