

LD200-0CW-20D-LL

Cool White

5mm, Domed, 8.6mm Height

17° viewing angle

62 lumens per Watt

($I_f = 20\text{mA}$, $T_a = 25^\circ\text{C}$)

DWG BY:
LL / GP
08-02-07

CHK BY:
PL
11-29-07

QA:

__-__-__

MFG:

__-__-__


REVISION: -

11-28-07

Features:

- High intensity
- Standard 5mm diameter package
- Tinned leads
- Pb-free

Package Dimensions:

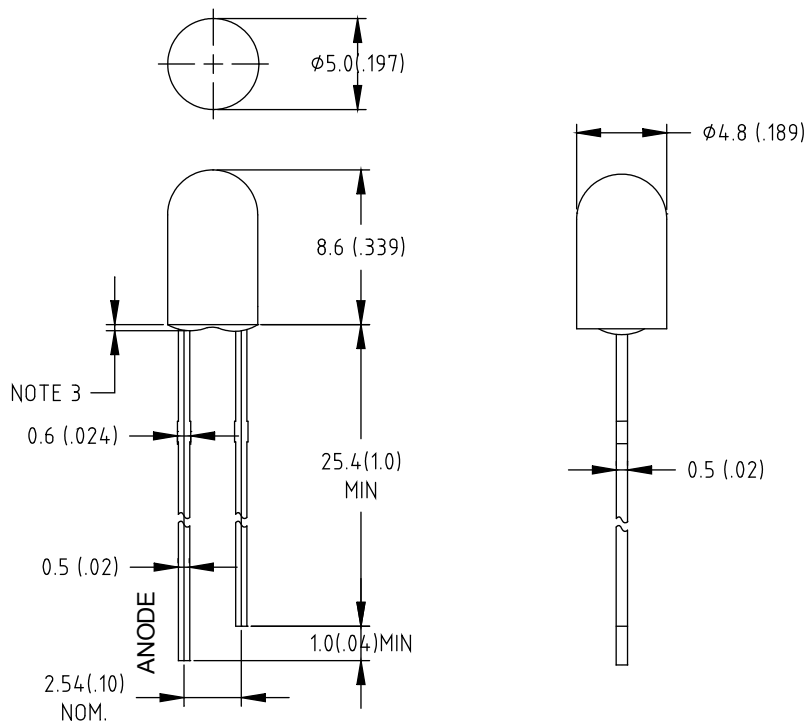

Part No.	Chip Material	Lens Color	Emission Color
LD200-0CW-20D-LL	InGaN	Water Clear	White

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. Protruded resin under flange is 1.0mm (.04") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.
6. Precautions for ESD: Static electricity and surge can damage the LED. It is recommended to use a wristband or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

**Absolute Maximum Ratings at Ta=25°C**

Parameter	MAX.	Unit
Power Dissipation	80	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	20	mA
Derating Linear From 50°C	0.4	mA/!C
Reverse Voltage	5	V
Electrostatic Discharge (ESD)	150	V
Operating Temperature Range	-20°C to +80°C	
Storage Temperature Range	-30°C to +100°C	
Lead Soldering Temperature [4mm (.157") From Body]	260°C for 5 Seconds	

Electrical Optical Characteristics at Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _V	11,000	16,000	---	mcd	I _F =20mA (Note 1)
Viewing Angle	2θ _{1/2}	13	17	19	Deg	(Note 2)
Forward Voltage	V _F	---	3.2	4.0	V	I _F =20mA
Reverse Current	I _R	---	---	50	μA	V _R =5V
SCP	---	---	0.30	---	cd	---
Lumens	---	---	4.0	---	lm	---
Radiant Intensity	---	---	55	---	mW/sr	---
Color Rendering Index	CRI	79	---	83	---	---


Color Rank	x	y	x	y	x	y	x	y
LTC & LTD	0.270	0.285	0.288	0.250	0.305	0.275	0.295	0.325

Notes:


1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. θ_{1/2} is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. Forward voltage measurement allowance is ±0.1V
4. Luminous Intensity Measurement Allowance is ±10%.

Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)


CIE 1931 Chromaticity Diagram

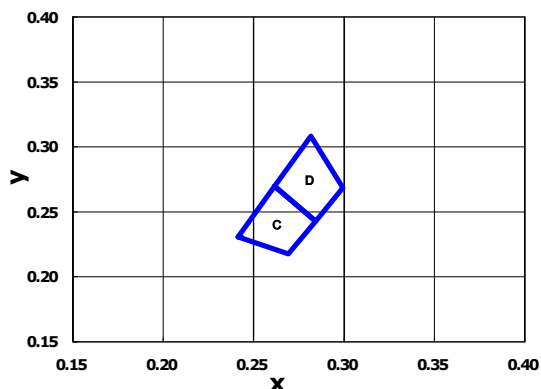


Spectral Radiance

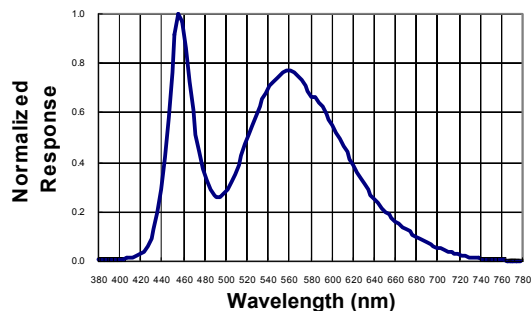


**Relative Intensity
vs Forward Current**

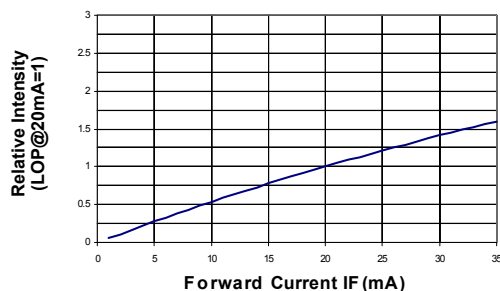


**Forward Current
vs Forward Voltage**

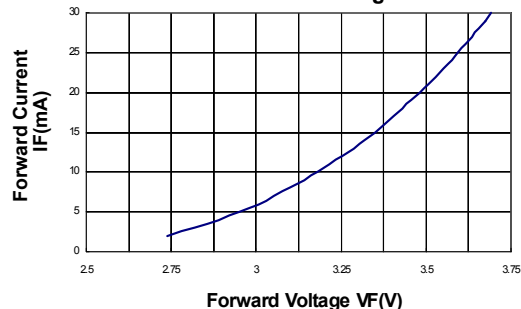

**Forward Current vs.
Chromaticity coordinate**

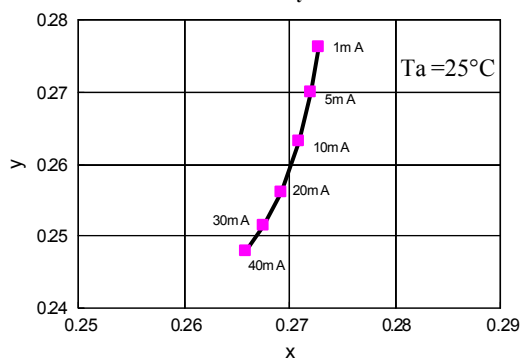

**Forward Current
Derating Curve**

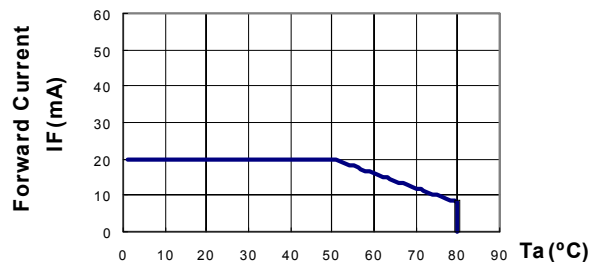

Beam Pattern

