

NARROWBAND SP4T SWITCH REFLECTIVE AND ABSORPTIVE 0.02-18 GHz

GENERAL INFORMATION:

Series TF-4 and TN-4-A narrowband switches are medium power devices that operate over commonly used frequency ranges. Carefully selected diodes placed in either series, series-shunt, or shunt configurations produce excellent electrical performance from UHF through KU bands.

GENERAL SPECIFICATIONS:

Frequency Coverage:	0.02 to 18.0 GHz.
RF Impedance:	50 OHMS.
RF Power:	+20 dBm operational. Consult factory for high power options.
DC Requirements:	For switches without drivers, each path requires +60 mA for the "off" condition and -60 mA for the "on" condition. Switches with drivers require +5 volts at +240 mA and -5 volts at -100 mA supplies. Logic is TTL "0" when "on" and "1" when "off". Different supply voltages and logic available if specified at time of order.
Temperature Information:	Operating temperature from -55°C to +85°C.
Switching Speed:	10% to 90% or 90% to 10% of RF. There is an additional 30 nanosec of driver delay.
Environment:	MIL-E-5400, MIL-STD-202, MIL-E-16400 MIL-STD-883 (Special request only).
Connectors:	RF connectors are SMA. Other connectors available (when specified at time of order) include types N, TNC, and BNC. Mating connector supplied for all units with multipin connector; ITT Cannon MDB1-9SSL or equiv.

NOTES:

1. All switches, with drivers, are available with either solder pins, or a multi-pin connector for the drive connection, when specified at time of order. (See "outlines with driver".)
2. When ordering, add suffix for configuration desired to the model number. ('S' for rectangular, 'R' for seven sided.) i.e. TF-411R.
3. If driver is required, add 'D' to the model number when ordering, i.e. Model TN-411AR, with driver, becomes TN-411ARD.
4. When ordering, the complete model number should be given. The model number consists of the model number for a standard switch plus the dash number for any options, i.e. Model TF-420RD-1 is a seven sided SP4T reflective switch with driver whose frequency range is 0.7 to 0.8 GHz and a switching speed of 100 nanosec.
5. Any unit listed can be supplied with pins instead of RF connectors. (Consult factory.)

MECHANICAL OUTLINES

Outline	A Inches cm.	B Inches cm.
1	0.71 1.80	1.350 3.429
2	1.00 2.54	2.000 5.080


Inches/Centimeters
xx ± 0.3 xxx ± .010/ xx ± .08 xxx ± .025

TYPICAL MODEL NO.


TF or TN	XXX or XXXX	S or R	D	X
Model Series	Freq Code	Pkg Style	Driver Option	Speed Option
		(Note 2)	(Note 3)	(Note 4)

Hermetic Seal
and Mil STD 883
Screening Available


SERIES TF-4/TN-4-A

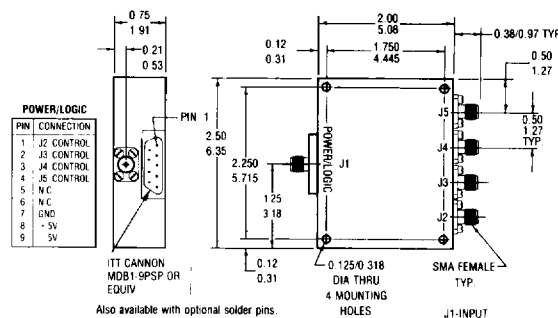


CONFIGURATION S
OUTLINE WITH DRIVER

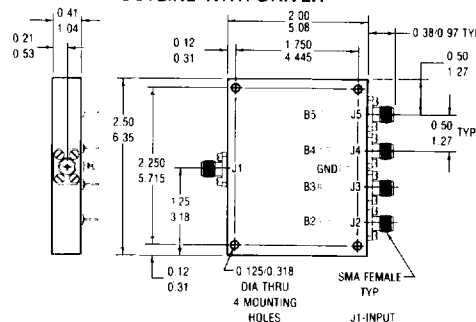

CONFIGURATION S
OUTLINE WITHOUT DRIVER

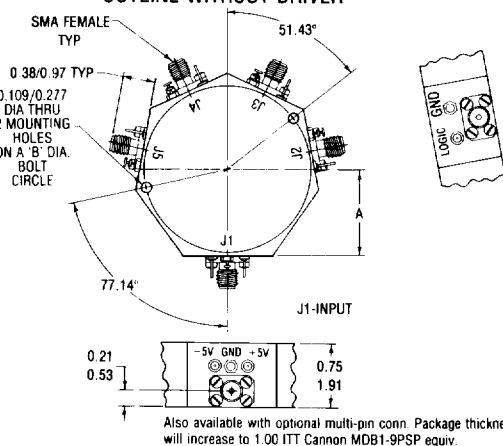

CONFIGURATION R
OUTLINE WITH DRIVER

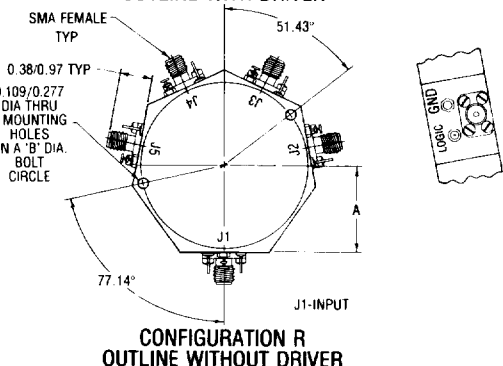

CONFIGURATION R
OUTLINE WITHOUT DRIVER

**KDI/triangle
ELECTRONICS**

31 Farinella Drive • East Hanover, NJ 07936 • Phone: (201) 884-1423
TWX: (710) 986-8202 • FAX: (201) 884-0445

NARROWBAND

SP4T SWITCH

REFLECTIVE AND ABSORPTIVE 0.02-18 GHz

SERIES TF-4/TN-4-A

ELECTRICAL PERFORMANCE

Power: 1 watt average, 10 watts peak, survival


STANDARD SWITCH						HIGH SPEED OPTION			
Isolation: 30 dB minimum Speed: 2 microsec. maximum						MODEL-1		MODEL-2	
Reflective Model No.	Absorptive Model No.	Frequency Range GHz	Insertion Loss Max. dB Ref. / Abs.	VSWR† Max.	Outline Config. R Only Ref. / Abs.	Speed Nanosec.	Insertion Loss Max. dB Ref. / Abs.	Speed Nanosec.	Insertion Loss Max. dB Ref. / Abs.
TF-411	TN-411-A	0.02-0.07	0.50 / 0.60	1.40	2 / 2	500	0.55 / 0.64	N/A	N/A
TF-414	TN-414-A	0.2-0.25	0.50 / 0.60	1.40	2 / 2	500	0.55 / 0.65	N/A	N/A
TF-417	TN-417-A	0.4-0.45	0.60 / 0.70	1.40	2 / 2	200	0.65 / 0.75	N/A	N/A
TF-420	TN-420-A	0.7-0.8	0.70 / 0.80	1.40	1 / 2	100	0.80 / 0.90	20	0.90 / 1.00
TF-423	TN-423-A	0.95-1.22	0.80 / 0.90	1.40	1 / 2	100	0.90 / 1.00	20	1.00 / 1.10
TF-426	TN-426-A	1.02-1.10	0.80 / 0.90	1.40	1 / 2	100	0.90 / 1.00	20	1.00 / 1.10
TF-429	TN-429-A	1.2-1.4	0.80 / 0.90	1.40	1 / 2	100	0.90 / 1.00	20	1.00 / 1.10
TF-432	TN-432-A	1.5-1.6	0.80 / 0.90	1.40	1 / 2	100	0.90 / 1.00	20	1.00 / 1.10
TF-435	TN-435-A	1.7-2.4	0.90 / 1.00	1.40	1 / 2	100	1.00 / 1.10	20	1.10 / 1.20
TF-438	TN-438-A	2.2-2.3	0.90 / 1.00	1.40	1 / 2	100	1.00 / 1.10	20	1.10 / 1.20
TF-441	TN-441-A	2.9-3.1	0.90 / 1.00	1.40	1 / 2	100	1.00 / 1.10	20	1.10 / 1.20
TF-444	TN-444-A	3.1-3.5	0.90 / 1.00	1.40	1 / 2	100	1.00 / 1.10	20	1.10 / 1.20
TF-447	TN-447-A	3.3-3.7	0.90 / 1.00	1.40	1 / 2	100	1.00 / 1.10	20	1.10 / 1.20
TF-450	TN-450-A	3.7-4.2	0.90 / 1.00	1.40	1 / 2	100	1.00 / 1.10	20	1.10 / 1.20
TF-453	TN-453-A	4.2-4.4	1.00 / 1.10	1.40	1 / 2	100	1.10 / 1.20	20	1.20 / 1.30
TF-456	TN-456-A	4.4-5.0	1.10 / 1.20	1.40	1 / 2	100	1.20 / 1.30	20	1.30 / 1.40
TF-459	TN-459-A	5.0-5.25	1.10 / 1.20	1.50	1 / 2	100	1.20 / 1.30	20	1.30 / 1.40
TF-462	TN-462-A	5.4-5.9	1.10 / 1.20	1.50	1 / 2	100	1.20 / 1.30	20	1.30 / 1.40
TF-465	TN-465-A	5.9-6.4	1.10 / 1.20	1.50	1 / 2	100	1.20 / 1.30	20	1.30 / 1.40
TF-468	TN-468-A	6.7-7.4	1.25 / 1.35	1.50	1 / 2	100	1.40 / 1.50	20	1.50 / 1.60
TF-471	TN-471-A	7.1-7.7	1.25 / 1.35	1.50	1 / 2	100	1.40 / 1.50	20	1.50 / 1.60
TF-474	TN-474-A	8.5-9.6	1.40 / 1.50	1.50	1 / 2	100	1.50 / 1.60	20	1.60 / 1.70
TF-477	TN-477-A	9.0-9.2	1.40 / 1.50	1.50	1 / 2	100	1.50 / 1.60	20	1.60 / 1.70
TF-480	TN-480-A	9.3-9.7	1.40 / 1.50	1.50	1 / 2	100	1.50 / 1.60	20	1.60 / 1.70
TF-483	TN-483-A	9.8-10.4	1.60 / 1.70	1.60	1 / 2	100	1.70 / 1.80	20	1.80 / 1.90
TF-486	TN-486-A	10.0-10.5	1.60 / 1.70	1.60	1 / 2	100	1.70 / 1.80	20	1.80 / 1.90
TF-489	TN-489-A	12.0-12.4	1.70 / 1.80	1.60	1 / 2	100	1.80 / 1.90	20	1.90 / 2.00
TF-492	TN-491-A	13.1-13.5	1.80 / 1.90	1.60	1 / 2	100	1.90 / 2.00	20	2.00 / 2.10
TF-495	TN-494-A	14.5-15.5	1.80 / 1.90	1.60	1 / 2	100	1.90 / 2.00	20	2.00 / 2.10
TF-496	TN-496-A	15.0-17.0	1.80 / 1.90	1.60	1 / 2	100	1.90 / 2.00	20	2.00 / 2.10
TF-499	TN-499-A	16.0-18.0	1.80 / 1.90	1.60	1 / 2	100	1.95 / 2.05	20	2.10 / 2.20

If improvement of any of the electrical specifications listed above is required, consult factory.

† Reflective Switch: VSWR measured in the 'ON' input and 'ON' Output Position.

Absorptive Switch: VSWR measured in the 'ON' Input and 'ON' Output and 'OFF' Output Position.

Insertion Loss measured with input power less than 100 mW.

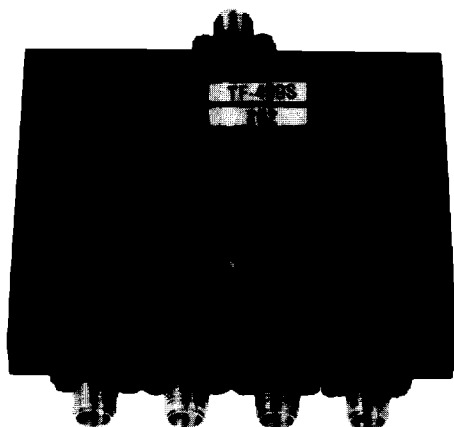

**KDI/triangle
ELECTRONICS**

31 Farinella Drive • East Hanover, NJ 07936 • Phone: (201) 884-1423
TWX: (710) 986-8202 • FAX: (201) 884-0445