
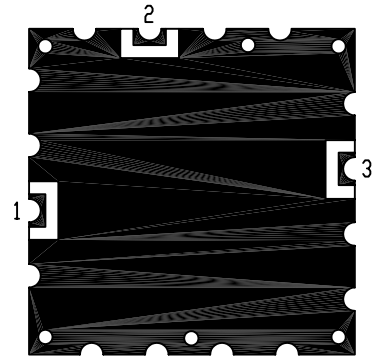



CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +100 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

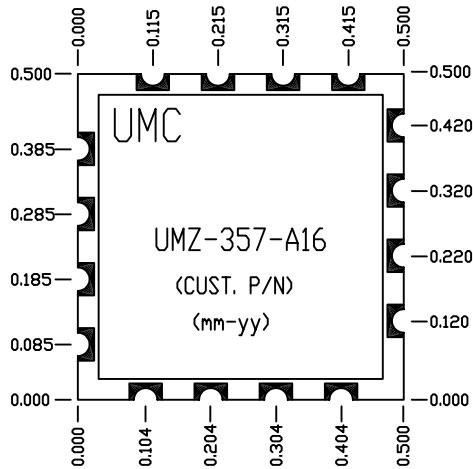

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified,
dimensions are in inches

Universal Microwave Corporation
Proprietary Document

Prepared by: M.BANKS 12/24/03

Engineer:

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMZ-357-A16

SIZE
A

FSCM NO.

DWG NO.

UP-357

REV
A

SCALE: N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz	2400		2500
Power Output, dBm	-2.5	0	+2.5
Harmonics, dBc	--	-20	-15
SSB Phase Noise, dBc/Hz			
@ Offset = 1kHz	--	-79	-74
@ Offset = 10kHz	--	-105	-100
@ Offset = 100kHz	--	-125	-120
@ Offset = 1MHz	--	-145	-140
@ Offset = 10MHz	--	-164	-159
Pushing, MHz/V	--	1	2
Pulling, MHz p-p, @12dBr, all phases	--	1	2
Tuning Voltage, Vdc	+0.5		+4.5
Tuning Sensitivity, MHz/V	--	40	--
Frequency drift with temperature			
@ -40 degrees C, MHz	--	6	10
@ +85 degrees C, MHz	--	6	10
Supply Voltage, Vdc	--	+5.0	--
Supply Current, mAdc	--	27	--
Output Power @ Vtune = 0 and 4.5V	-3.0	--	--
Tuning Port Capacitance, pF	--	47	--
3dB Modulation Bandwidth, kHz	--	100	--

TABLE 1.0, ELECTRICAL SPECIFICATIONS

Unless otherwise specified,
dimensions are in inches

Universal Microwave Corporation
Proprietary Document

Prepared by: M.BANKS 12/24/03

Universal Microwave Corporation
2339 Destiny Way
Ddessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMZ-357-A16

SIZE
A

FSCM NO.

DWG NO.

UP-357

REV
A

SCALE: N/A

SHEET 1 OF 2