

[Molex.com](#)

English
日本語
한국어
简体中文

[Register | Login](#)
[My Parts \(0 items \)](#)

Search site: Search: [Go](#)

- Product Name
- Cross-Ref
- Catalog
- Literature
- Industries
- Standards
- Contact Us
- About Us
- Investors
- Careers

- Connectors
- Sockets
- I/O Connectors
- Cable Assemblies
- Fiber Optics
- Printed Circuit Products
- Industrial Products
- Lighting Products

Switch Language

- [Home](#)
- [PCB Headers](#)
- [Datasheet](#)

Need Assistance?

- Contact Us
- Find a Distributor
- Order Samples
- Tech Library
- Ecocare
- Electrical Models

[Printer-friendly page](#)

[Email this page](#)

Part Number:

0878322621

Status:

Active

Overview:

Milli-Grid™

Description:

2.00mm (.079") Pitch Milli-Grid™ Header, Surface Mount, Vertical, Shrouded, Lead-free, 26 Circuits, 0.76µm (30µ") Gold (Au) Plating, with Locking Windows and Center Polarization Slot, PCB Locator, Tube

Documents: *Note - Please disable browser pop-up blockers for documents on www.molex.com*

[Drawing \(PDF\)](#)

[Product Specification PS-87831-027 \(PDF\)](#)

[3D Model](#)


EU RoHS
ELV and RoHS
Compliant

China RoHS



REACH SVHC
Contains SVHC: No

Halogen-Free
Status
Not Halogen-Free

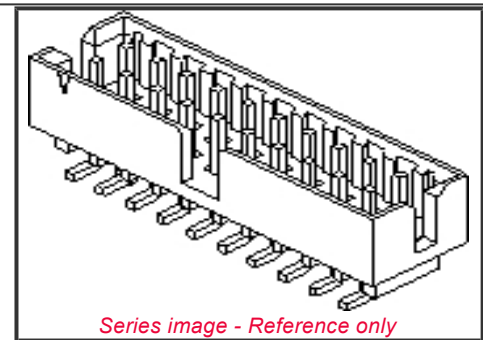

Series image - Reference only

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[87832Series](#)

Mates With

[50394](#) Wire-to-Board Terminals
Link:51110 Wire-to-Board Crimp Housing

Link:87568 Wire-to-Board IDT Housings

Link:79107 Board-to-Board Top Entry Through Hole Receptacle

Link:79108 Board-to-Board FFC/FPC Top Entry Through Hole Receptacle

L

Order Products:

Part Detail: [\(show all\)](#)

[General](#)[Physical](#)[Electrical](#)[Agency Certification](#)[Solder Process Data](#)[Material Info](#)[Reference - Drawing Numbers](#)

General

Product Family	PCB Headers
Series	<u>87832</u>
Application	Wire-to-Board
Comments	Without Cap; Contact Molex for application in automotive industry
Overview	<u>Milli-Grid™</u>
Product Name	Milli-Grid™

Physical

Breakaway	No
Circuits (Loaded)	26
Circuits (maximum)	26
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	75
Plating min: Termination (µm)	1.88
Polarized to Mating Part	Side Slots (2)
Polarized to PCB	No
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-55°C to +105°C

Termination Interface: Style	Surface Mount
------------------------------	---------------

Electrical(Please review the Product Specification for specific details.)

Current - Maximum per Contact	2A
Voltage - Maximum	125V

Agency Certification

CSA	LR19980
UL	E29179

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Product Specification	PS-87831-027
Sales Drawing	SD-87832-007