

SPECIFICATIONS

DDR II Connector

Mechanical

Contact Retention Force: 0.75Lbs (0.34kgf) min. per Contact
Durability: 25 Cycles
Dram Board Insertion Force: 3 oz max. per Contact

AT240 Series


Vertical Type, T/H Type
1.00mm [.039"] Pitch
240 Pos.

Electrical


Voltage Raging: 250V AC
Current Rating: 1.0A max., 30 max., in Temperature Rise
Insulation Resistance: 1000MW min. initial
Dielectric Withstanding Voltage: 500V AC at Sea Level
Low Level Contact Resistance: 30mW max. initial

Physical

Housing: Thermoplastic, UL 94V-0 rated in Blue Color
Contact: Copper alloy
Ejector: Thermoplastic, UL 94V-0 rated in Ivory or Natural Color
Metal Hold Down: Copper alloy
Operating Temperature: -55 to +105

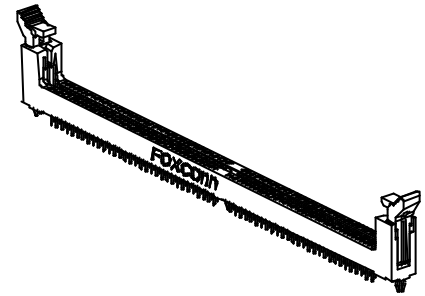


DRAWING

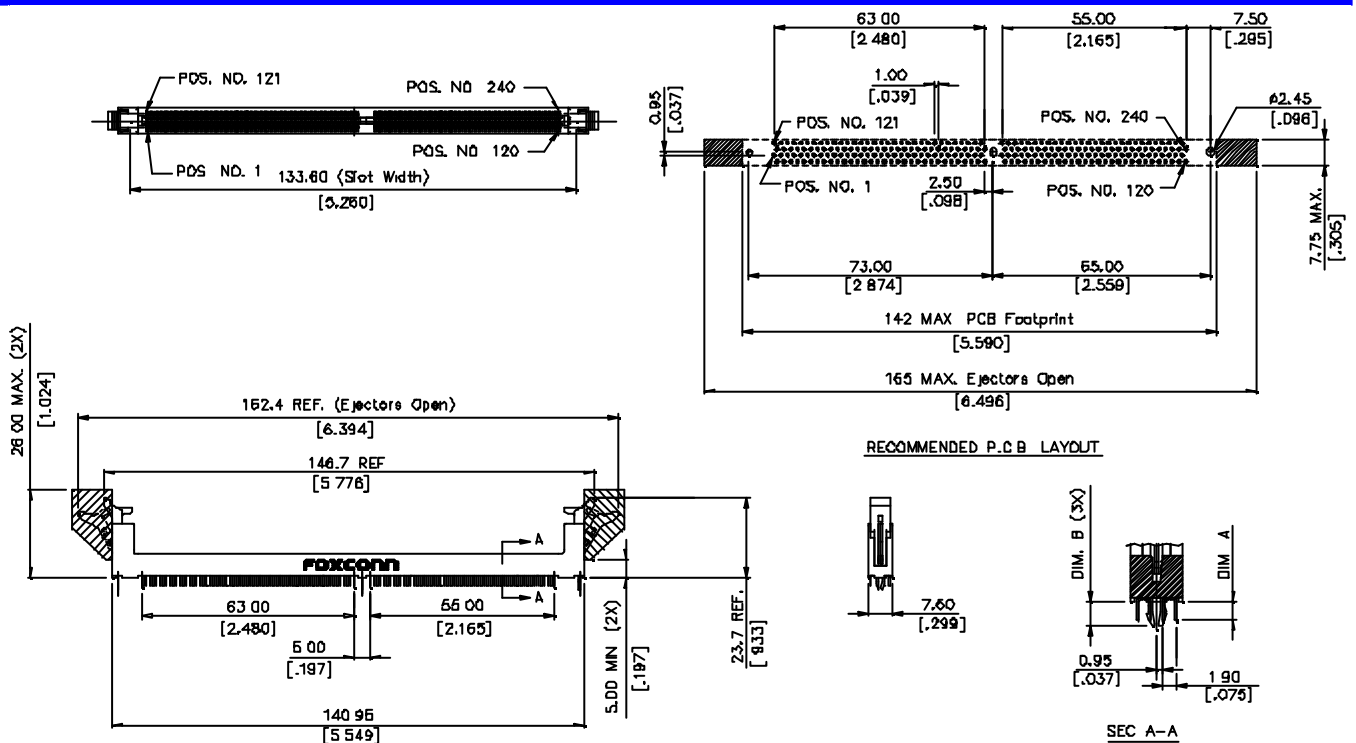

ORDERING INFORMATION

PRODUCT NO.: A T 2 4 0 * * - H 3 L

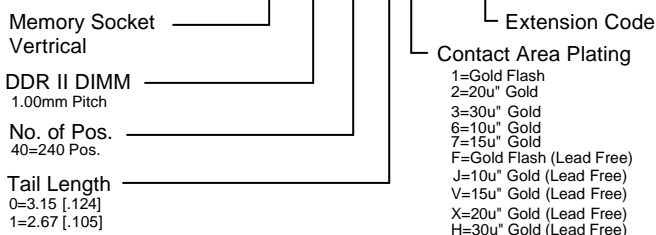

AT240*-H3L	240	1.8V	3.15 [.124]	3.78 [.149]
AT240*-H3L		1.8V	2.67 [.105]	4.57 [.180]
P/N	POS.	VOLTAGE MARKING	DIM. A	DIM. B