




mm to inch

1 inch = 25.4 mm
1 mm = .040 inches

Note

! We have changed the SPRINGCON type names. complete cross reference see page EA-6.

RIA ELECTRONIC CONNECTORS

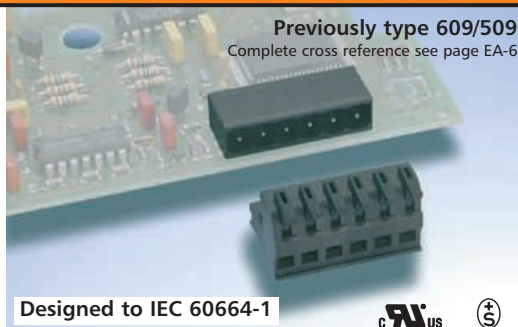

ASP 04 long eccentric lever

ASP 03 short eccentric lever

Additional Centerline

Type ASP04
Type ASP03

Headers that mate with

Type ASP04 and Type ASP03

Type 319 Page H-15
 Type 320 Page H-17
 Type 329 Page H-19
 Type 330 Page H-21
 Type 270 Page H-22
 Type 274 Page H-22
 Type 276 Page H-24
 Type 278 Page H-23
 Type 280 Page H-24

Accessories

for Type ASP04 and Type ASP03
(only with headers PLUGCON Type 319 to 330)
Coding set 720254-01-6
Coding set 720254-02-5
Page J-10

Optional colors

green
Please order green, if you use the mated headers type 270, 274 and 276.

Suffixes for color

suffix	color
01	brown (standard)
06	green

Electrical Data


Voltage 300 V - centerline 5 mm
600 V - centerline 10 mm
Current 10 A
Wire Range 16 - 28 AWG
Wire strip length 4 mm

Mechanical Data

Housing UL 94V-0 -40 °F to 189 °F
(-40 °C to 105 °C)
Eccentric lever UL 94HB -40 °F to 230 °F
(-40 °C to 110 °C)
Spring clamp stainless chrome
molybdenum steel
Contact pin copper alloy, tin plated
Colors brown (optional colors see margin)
Pole sizes 2 to 24 - centerline 5 mm
2 to 12 - centerline 10 mm

Additional material data - pages EA-3 to EA-5

Dimensions (mm)

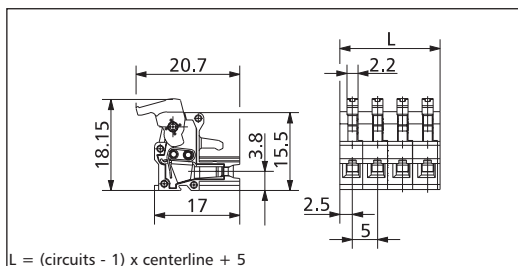

Part Numbers (other circuits please consult factory)

Complete the part number by adding the pole size.

ASP04 centerline 5 mm

Part No. ASP04 5

XX

02030405060708

0910111213141516

1718192021222324

ASP04 centerline 10 mm

Part No. ASP04 9

XX

02030405060708

09101112

ASP03 centerline 5 mm

Part No. ASP03 5

XX

02030405060708

0910111213141516

1718192021222324

ASP03 centerline 10 mm

Part No. ASP03 9

XX

02030405060708

09101112

XX = color suffix - Please replace "XX" by the requested color suffix (see margin).