


**GPP TRANSIENT VOLTAGE SUPPRESSOR
400 WATT PEAK POWER 1.0 WATT STEADY STATE**

FEATURES

- * Plastic package has underwriters laboratory
- * Glass passivated chip construction
- * 400 watt surge capability at 1ms
- * Excellent clamping capability
- * Low zener impedance
- * Fast response time

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load,
For capacitive load, derate current by 20%.

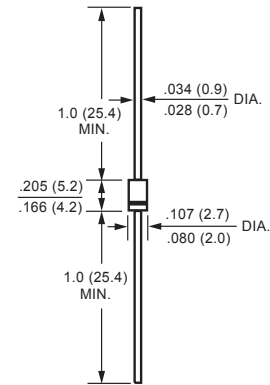

Dimensions in inches and (millimeters)

DEVICES FOR BIPOLAR APPLICATIONS

For Bidirectional use C or CA suffix for types P4KE6.8 thru P4KE440

Electrical characteristics apply in both direction

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

| RATINGS | SYMBOL | VALUE | UNITS |
|---|----------|--------------|-------|
| Peak Power Dissipation at TA = 25°C, TP = 1mS (Note 1) | PPPM | Minimum 400 | Watts |
| Steady State Power Dissipation at TL = 75°C lead lengths, .375" (9.5 mm) (Note 2) | PM(AV) | 1.0 | Watts |
| Peak Forward Surge Current, 8.3ms single half sine wave-superimposed on rated load(JEDEC METHOD) (Note 2) | IFSM | 40 | Amps |
| Maximum Instantaneous Forward Current at 25A for unidirectional only (Note 3) | VF | 3.5/6.5 | Volts |
| Operating and Storage Temperature Range | TJ, TSTG | -55 to + 150 | °C |

- NOTES : 1. Non-repetitive current pulse, per Fig.3 and derated above TA = 25°C per Fig.2.
2. Mounted on 1.6 X 1.6" (40 X 40mm) per Fig. 5
3. VF = 3.5V max. for devices of V(BR) ≤ 220V and VF = 6.5 Volts max. for devices of V(BR) > 220V.
4. "Fully ROHS compliant", "100% Sn plating (Pb-free)".

RATING AND CHARACTERISTIC CURVES (P4KE6.8 THRU P4KE440CA)

FIG. 1 - PEAK PULSE POWER RATING CURVE

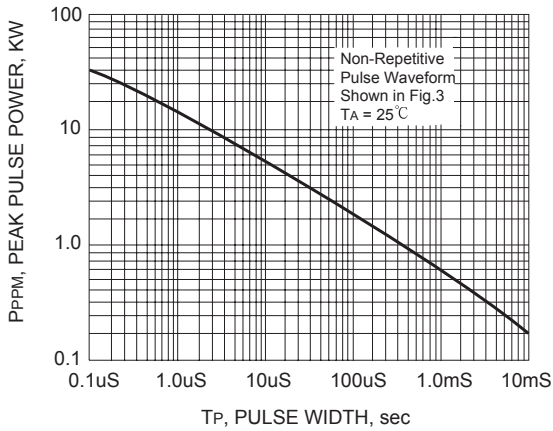


FIG. 2 - PULSE DERATING CURVE

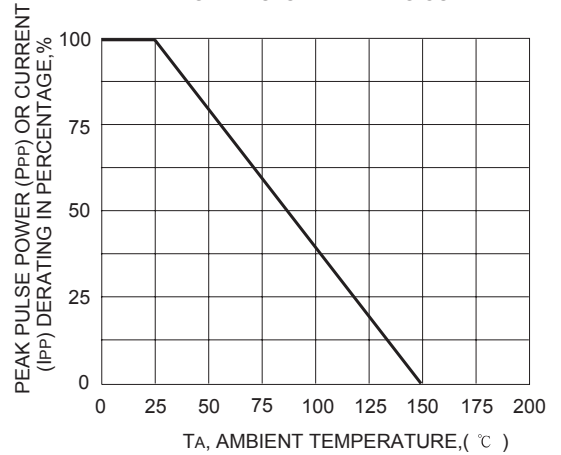


FIG. 3 - PULSE WAVEFORM


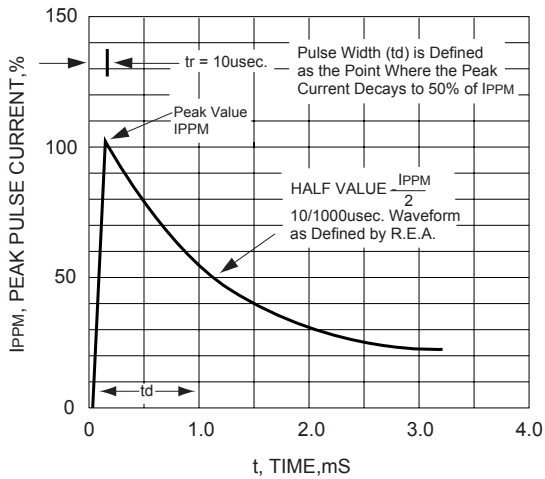


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

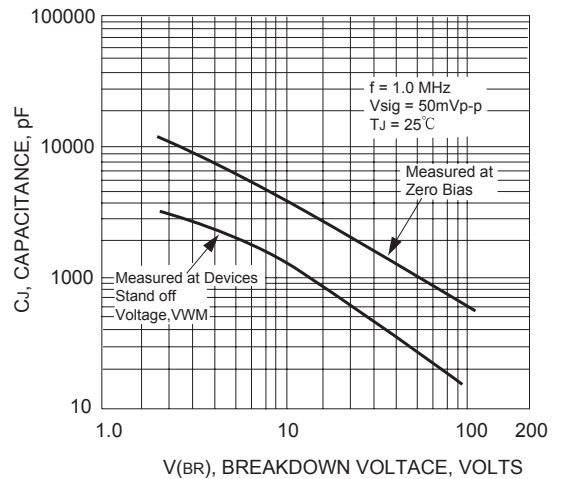

RATING AND CHARACTERISTIC CURVES(P4KE6.8 THRU P4KE440CA)

FIG. 5 - STEADY STATE POWER DERATING CURVE

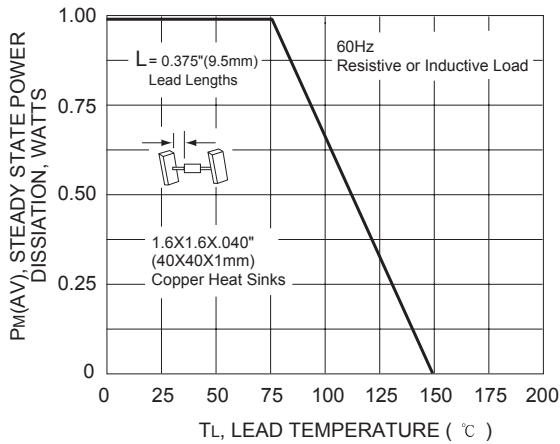


FIG. 6 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT UNIDIRECTIONAL


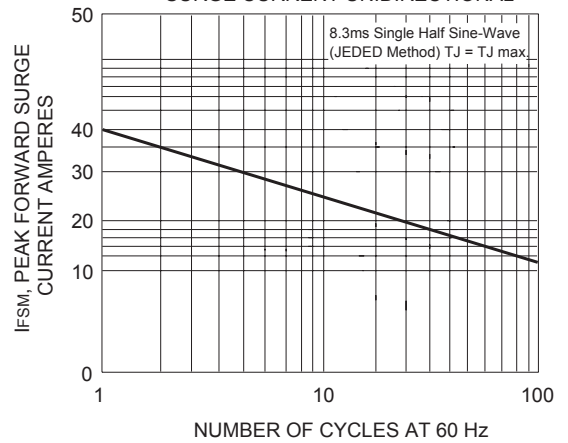


FIG. 7 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

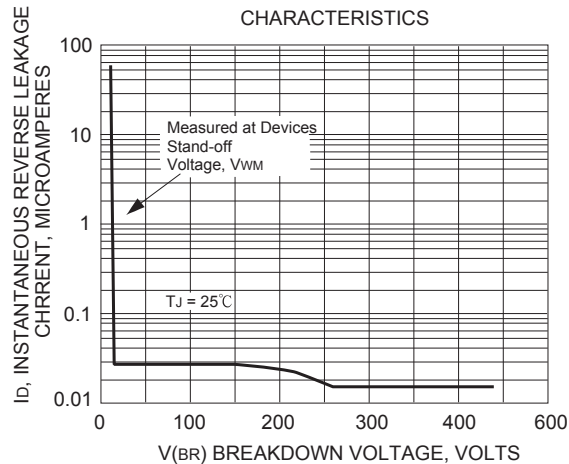

TRANSIENT VOLTAGE SUPPRESSORS

400W SERIES TVS DIODES / DO-41 (CASE 7) 400W

| TYPE | Breakdown Voltage | | | Reverse Stand off Voltage V_{WM} (Volts) | Maximum Reverse Leakage at V_{WM} I_D (μ A) | Maximum Peak Pulse Current I_{PPM} (Amps) | Maximum Clamping Voltage at I_{PPM} V_C (Volts) |
|----------|-------------------|------|--------------|--|--|---|---|
| | V_{BR} (Volts) | | @ I_T (mA) | | | | |
| | MIN. | MAX. | | | | | |
| P4KE6.8 | 6.12 | 7.48 | 10 | 5.50 | 1000 | 37 | 10.8 |
| P4KE6.8A | 6.45 | 7.14 | 10 | 5.80 | 1000 | 38.1 | 10.5 |
| P4KE7.5 | 6.75 | 8.25 | 10 | 6.05 | 500 | 34.2 | 11.7 |
| P4KE7.5A | 7.13 | 7.88 | 10 | 6.40 | 500 | 35.4 | 11.3 |
| P4KE8.2 | 7.38 | 9.02 | 10 | 6.63 | 200 | 32 | 12.5 |
| P4KE8.2A | 7.79 | 8.61 | 10 | 7.02 | 200 | 33.1 | 12.1 |
| P4KE9.1 | 8.19 | 10.0 | 1.0 | 7.37 | 50 | 29 | 13.8 |
| P4KE9.1A | 8.65 | 9.55 | 1.0 | 7.78 | 50 | 29.9 | 13.4 |
| P4KE10 | 9.00 | 11.0 | 1.0 | 8.10 | 10 | 26.7 | 15.0 |
| P4KE10A | 9.50 | 10.5 | 1.0 | 8.55 | 10 | 27.6 | 14.5 |
| P4KE11 | 9.90 | 12.1 | 1.0 | 8.92 | 5.0 | 24.7 | 16.2 |
| P4KE11A | 10.5 | 11.6 | 1.0 | 9.40 | 5.0 | 25.6 | 15.6 |
| P4KE12 | 10.8 | 13.2 | 1.0 | 9.72 | 5.0 | 23.1 | 17.3 |
| P4KE12A | 11.4 | 12.6 | 1.0 | 10.2 | 5.0 | 24 | 16.7 |
| P4KE13 | 11.7 | 14.3 | 1.0 | 10.5 | 5.0 | 21.1 | 19.0 |
| P4KE13A | 12.4 | 13.7 | 1.0 | 11.1 | 5.0 | 22 | 18.2 |
| P4KE15 | 13.5 | 16.5 | 1.0 | 12.1 | 5.0 | 18.2 | 22.0 |
| P4KE15A | 14.3 | 15.8 | 1.0 | 12.8 | 5.0 | 18.9 | 21.2 |
| P4KE16 | 14.4 | 17.6 | 1.0 | 12.9 | 5.0 | 17 | 23.5 |
| P4KE16A | 15.2 | 16.8 | 1.0 | 13.6 | 5.0 | 17.8 | 22.5 |
| P4KE18 | 16.2 | 19.8 | 1.0 | 14.5 | 5.0 | 15.1 | 26.5 |
| P4KE18A | 17.1 | 18.9 | 1.0 | 15.3 | 5.0 | 15.9 | 25.2 |
| P4KE20 | 18.0 | 22.0 | 1.0 | 16.2 | 5.0 | 13.7 | 29.1 |
| P4KE20A | 19.0 | 21.0 | 1.0 | 17.1 | 5.0 | 14.4 | 27.7 |
| P4KE22 | 19.8 | 24.2 | 1.0 | 17.8 | 5.0 | 12.5 | 31.9 |
| P4KE22A | 20.9 | 23.1 | 1.0 | 18.8 | 5.0 | 13.1 | 30.6 |
| P4KE24 | 21.6 | 26.4 | 1.0 | 19.4 | 5.0 | 11.5 | 34.7 |
| P4KE24A | 22.8 | 25.2 | 1.0 | 20.5 | 5.0 | 12 | 33.2 |
| P4KE27 | 24.3 | 29.7 | 1.0 | 21.8 | 5.0 | 10.2 | 39.1 |
| P4KE27A | 25.7 | 28.4 | 1.0 | 23.1 | 5.0 | 10.7 | 37.5 |
| P4KE30 | 27.0 | 33.0 | 1.0 | 24.3 | 5.0 | 9.2 | 43.5 |
| P4KE30A | 28.5 | 31.5 | 1.0 | 25.6 | 5.0 | 9.7 | 41.4 |
| P4KE33 | 29.7 | 36.3 | 1.0 | 26.8 | 5.0 | 8.4 | 47.7 |
| P4KE33A | 31.4 | 34.7 | 1.0 | 28.2 | 5.0 | 8.8 | 45.7 |
| P4KE36 | 32.4 | 39.6 | 1.0 | 29.1 | 5.0 | 7.7 | 52.0 |
| P4KE36A | 34.2 | 37.8 | 1.0 | 30.8 | 5.0 | 8.0 | 49.9 |
| P4KE39 | 35.1 | 42.9 | 1.0 | 31.6 | 5.0 | 7.1 | 56.4 |
| P4KE39A | 37.1 | 41.0 | 1.0 | 33.3 | 5.0 | 7.4 | 53.9 |
| P4KE43 | 38.7 | 47.3 | 1.0 | 34.8 | 5.0 | 6.5 | 61.9 |
| P4KE43A | 40.9 | 45.2 | 1.0 | 36.8 | 5.0 | 6.7 | 59.3 |
| P4KE47 | 42.3 | 51.7 | 1.0 | 38.1 | 5.0 | 5.9 | 67.8 |
| P4KE47A | 44.7 | 49.4 | 1.0 | 40.2 | 5.0 | 6.2 | 64.8 |
| P4KE51 | 45.9 | 56.1 | 1.0 | 41.3 | 5.0 | 5.4 | 73.5 |
| P4KE51A | 48.5 | 53.6 | 1.0 | 43.6 | 5.0 | 5.7 | 70.1 |
| P4KE56 | 50.4 | 61.6 | 1.0 | 45.4 | 5.0 | 5.0 | 80.5 |
| P4KE56A | 53.2 | 58.8 | 1.0 | 47.8 | 5.0 | 5.2 | 77.0 |

TRANSIENT VOLTAGE SUPPRESSORS

400W SERIES TVS DIODES / DO-41 (CASE 7) 400W

| TYPE | Breakdown Voltage | | @I _T (mA) | Reverse Stand off Voltage V _{WM} (Volts) | Maximum Reverse Leakage at V _{WM} I _D (uA) | Maximum Peak Pulse Current I _{PPM} (Amps) | Maximum Clamping Voltage at I _{PPM} V _C (Volts) |
|----------|----------------------------|------|-------------------------|---|---|--|--|
| | V _{BR} (Volts) | | | | | | |
| | MIN. | MAX. | | | | | |
| P4KE62 | 55.8 | 68.2 | 1.0 | 50.2 | 5.0 | 4.5 | 89.0 |
| P4KE62A | 58.9 | 65.1 | 1.0 | 53.0 | 5.0 | 4.7 | 85.0 |
| P4KE68 | 61.2 | 74.8 | 1.0 | 55.1 | 5.0 | 4.1 | 98.0 |
| P4KE68A | 64.6 | 71.4 | 1.0 | 58.1 | 5.0 | 4.3 | 92.0 |
| P4KE75 | 67.5 | 82.5 | 1.0 | 60.7 | 5.0 | 3.7 | 108 |
| P4KE75A | 71.3 | 78.8 | 1.0 | 64.1 | 5.0 | 3.9 | 103 |
| P4KE82 | 73.8 | 90.2 | 1.0 | 66.4 | 5.0 | 3.4 | 118 |
| P4KE82A | 77.9 | 86.1 | 1.0 | 70.1 | 5.0 | 3.5 | 113 |
| P4KE91 | 81.9 | 100 | 1.0 | 73.7 | 5.0 | 3.1 | 131 |
| P4KE91A | 86.5 | 95.5 | 1.0 | 77.8 | 5.0 | 3.2 | 125 |
| P4KE100 | 90.0 | 110 | 1.0 | 81.0 | 5.0 | 2.8 | 144 |
| P4KE100A | 95.0 | 105 | 1.0 | 85.5 | 5.0 | 2.9 | 137 |
| P4KE110 | 99.0 | 121 | 1.0 | 89.2 | 5.0 | 2.5 | 158 |
| P4KE110A | 105 | 116 | 1.0 | 94.0 | 5.0 | 2.6 | 152 |
| P4KE120 | 108 | 132 | 1.0 | 97.2 | 5.0 | 2.3 | 173 |
| P4KE120A | 114 | 126 | 1.0 | 102 | 5.0 | 2.4 | 165 |
| P4KE130 | 117 | 143 | 1.0 | 105 | 5.0 | 2.1 | 187 |
| P4KE130A | 124 | 137 | 1.0 | 111 | 5.0 | 2.2 | 179 |
| P4KE150 | 135 | 165 | 1.0 | 121 | 5.0 | 1.9 | 215 |
| P4KE150A | 143 | 158 | 1.0 | 128 | 5.0 | 1.9 | 207 |
| P4KE160 | 144 | 176 | 1.0 | 130 | 5.0 | 1.7 | 230 |
| P4KE160A | 152 | 168 | 1.0 | 136 | 5.0 | 1.8 | 219 |
| P4KE170 | 153 | 187 | 1.0 | 138 | 5.0 | 1.6 | 244 |
| P4KE170A | 162 | 179 | 1.0 | 145 | 5.0 | 1.7 | 234 |
| P4KE180 | 162 | 198 | 1.0 | 146 | 5.0 | 1.6 | 258 |
| P4KE180A | 171 | 189 | 1.0 | 154 | 5.0 | 1.6 | 246 |
| P4KE200 | 180 | 220 | 1.0 | 162 | 5.0 | 1.4 | 287 |
| P4KE200A | 190 | 210 | 1.0 | 171 | 5.0 | 1.5 | 274 |
| P4KE220 | 198 | 242 | 1.0 | 175 | 5.0 | 1.2 | 344 |
| P4KE220A | 209 | 231 | 1.0 | 185 | 5.0 | 1.2 | 328 |
| P4KE250 | 225 | 275 | 1.0 | 202 | 5.0 | 1.1 | 360 |
| P4KE250A | 237 | 263 | 1.0 | 214 | 5.0 | 1.2 | 344 |
| P4KE300 | 270 | 330 | 1.0 | 243 | 5.0 | 0.93 | 430 |
| P4KE300A | 285 | 315 | 1.0 | 256 | 5.0 | 1.00 | 414 |
| P4KE350 | 315 | 385 | 1.0 | 284 | 5.0 | 0.79 | 504 |
| P4KE350A | 333 | 368 | 1.0 | 300 | 5.0 | 0.83 | 482 |
| P4KE400 | 360 | 440 | 1.0 | 324 | 5.0 | 0.70 | 574 |
| P4KE400A | 380 | 420 | 1.0 | 342 | 5.0 | 0.73 | 548 |
| P4KE440 | 396 | 484 | 1.0 | 356 | 5.0 | 0.63 | 631 |
| P4KE440A | 418 | 462 | 1.0 | 376 | 5.0 | 0.66 | 602 |

- Notes :
1. V_{BR} measured after I_T applied for 300ms. I_T = square pulse or equivalent.
 2. For bidirectional use C or CA suffixs for all types (ex. P4KE6.8C,P4KE440CA) electrical characteristics apply in both directions.
 3. For bidirectional types having V_{WM} of 10 volts and less, the I_D limit is doubled.

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.