


## Peel-A-Way® Side by Side & End to End ZIP Strips

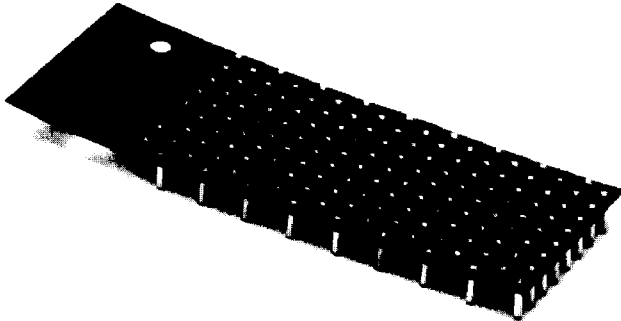

### Features:

- Peel away terminal carrier after soldering.
- Complete soldering visibility on both sides of PCB.
- Maximum air flow. Better flux rinse.
- Available in solder tail configurations with mounted heights from .015" (.38mm) to .165" (4.19mm) above PCB.
- Low insertion force contact.
- All terminals are closed end, screw machine construction for 100% anti-wicking of solder.
- ZIP socket configurations supplied in a Peel-A-Way® sheet of sockets to maximize socket loading rates and minimize your labor cost.

### Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16

Contact: Beryllium Copper - Copper Alloy 172, ASTM-B-194

### Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel

Contact: Gold over Nickel or Tin-Lead over Nickel

Gold per MIL-G-45204

Tin-Lead per MIL-P-81728


Nickel per QQ-N-290

### Side by Side DIP Strips

**SKZ** - Insulator Material:

Polyimide Film

Temperature range -269°C to 400°C (-452°F to 752°F)

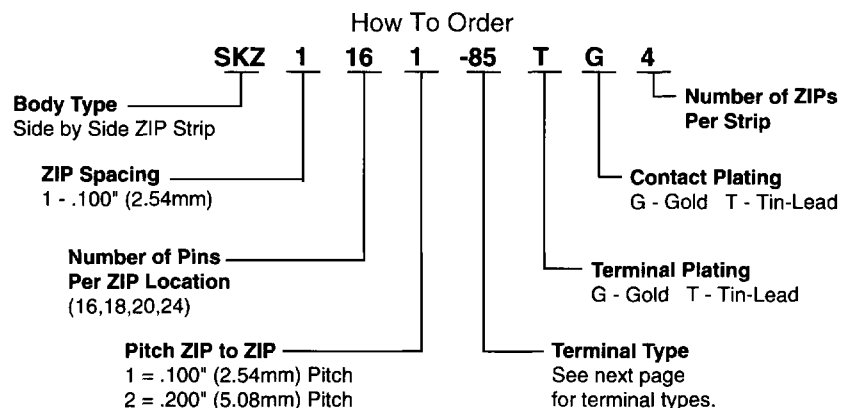



### End to End DIP Strips

**EKZ** - Insulator Material:

Polyimide Film

Temperature range -269°C to 400°C (-452°F to 752°F)

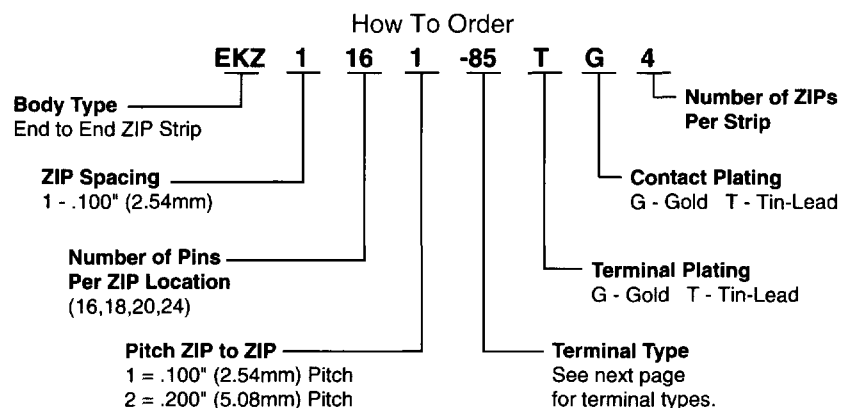






## Peel-A-Way® Side by Side & End to End ZIP Strips

Dual In-Line

### SKZ - Side by Side ZIP Strip

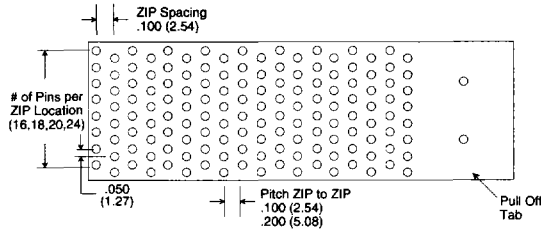


### EKZ - End to End ZIP Strip

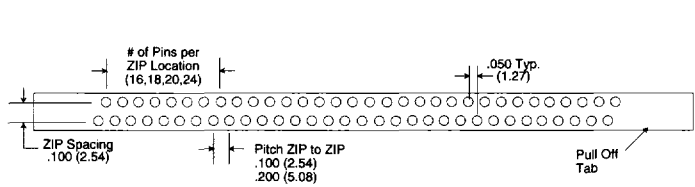

Side View - Terminal Type -85 Shown

### Terminal Information

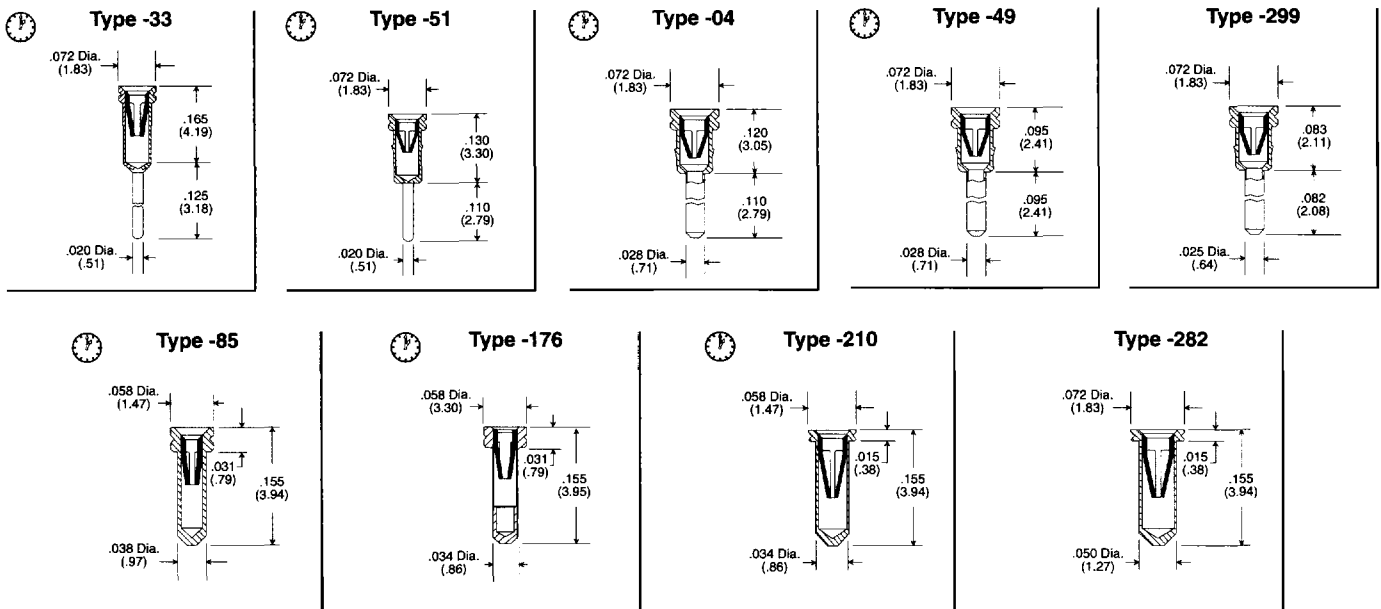


Quick turn delivery available on standard terminal types.

Additional terminal types available. See terminal section for detailed terminal information.


### Socket Options



RTV Sealed - Pg. 36



Tape Sealed - Pg. 37



Solder Preform - Pg. 35

See designated pages for how to order information on these socket options.