


**Baureihe SP-E 16/5
(Funkentstördrossel)**

**Series SP-E 16/5
(RFI suppression choke)**

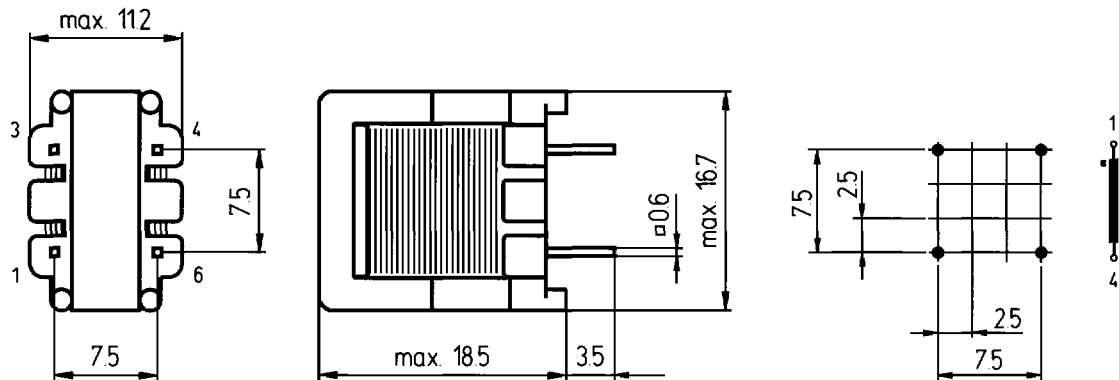

527

Technische Daten / Technical data

- Typischer Kern / Typical core: E 16/5
- Induktivität / Inductance: 0.39 - 3.9 mH ($\pm 10\%$)
- Strom / Current: 0.55 - 1.6 A
- Meßbedingungen / Measuring conditions: 10 kHz/50 mV/25°C
- Betriebstemperatur / Operating temperature: -30°C bis/up to +125°C
- Umgebungstemperatur / Ambient temperature: $\leq 60^\circ\text{C}$
- Isolierstoffklasse / Insulation class: B

L ₀ mH	I _N A	I _S (0.9 x L ₀) A	R _{CU} Ω	Bestellnummer Order no.
0.39	1.6	0.75	0.27	063.500
0.56	1.3	0.65	0.39	063.501
0.82	1.2	0.6	0.45	063.502
1.0	1.1	0.45	0.55	063.503
1.2	0.96	0.4	0.75	063.504
1.8	0.8	0.35	1.12	063.505
2.0	0.76	0.35	1.2	063.506
2.2	0.73	0.35	1.3	063.507
2.7	0.7	0.3	1.45	063.508
3.0	0.61	0.25	1.85	063.509
3.3	0.6	0.25	1.95	063.510
3.9	0.55	0.2	2.15	063.511