


- Special lock-down feature prevents floating of socket during soldering.
- Open insulator with ladder construction.
- Sockets are XY stackable.
- Socket pins feature closed end construction eliminating any solder wicking problems.

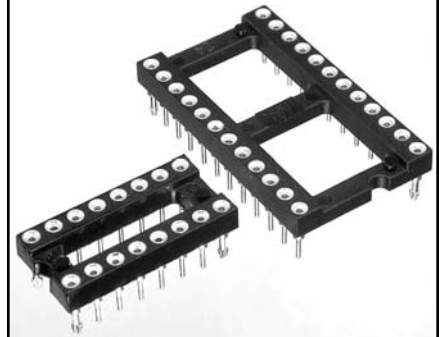

| Total number of pins | Pin Spacing |   |   | Quantity per tube | Ordering Information |
|----------------------|-------------|---|---|-------------------|----------------------|
|                      | A           | B | C |                   |                      |

| Total number of pins | A   | B   | C   | Quantity per tube |
|----------------------|-----|-----|-----|-------------------|
| 6                    | 0.3 | 0.3 | 0.4 | 67                |
| 8                    | 0.4 | 0.3 | 0.4 | 50                |
| 14                   | 0.7 | 0.3 | 0.4 | 28                |
| 16                   | 0.8 | 0.3 | 0.4 | 25                |
| 18                   | 0.9 | 0.3 | 0.4 | 22                |
| 20                   | 1.0 | 0.3 | 0.4 | 20                |
| 24                   | 1.2 | 0.3 | 0.4 | 16                |
| 28                   | 1.4 | 0.3 | 0.4 | 14                |
| 22                   | 1.1 | 0.4 | 0.5 | 18                |
| 24                   | 1.2 | 0.6 | 0.7 | 16                |
| 28                   | 1.4 | 0.6 | 0.7 | 14                |
| 32                   | 1.6 | 0.6 | 0.7 | 12                |
| 40                   | 2.0 | 0.6 | 0.7 | 10                |
| 48                   | 2.4 | 0.6 | 0.7 | 8                 |
| 64                   | 3.2 | 0.9 | 1.0 | 6                 |

**XX= Plating Code**  
**See Below**

**For RoHS compliance, select  $\diamond$  plating code. For the all gold option (XX=13) also change part number from 101-XX-XXX-41-56X000 to 101-13-XXX-41-56X100**



- 101-XX-306-41-56X000
- 101-XX-308-41-56X000
- 101-XX-314-41-56X000
- 101-XX-316-41-56X000
- 101-XX-318-41-56X000
- 101-XX-320-41-56X000
- 101-XX-324-41-56X000
- 101-XX-328-41-56X000
- 101-XX-422-41-56X000
- 101-XX-624-41-56X000
- 101-XX-628-41-56X000
- 101-XX-632-41-56X000
- 101-XX-640-41-56X000
- 101-XX-648-41-56X000
- 101-XX-964-41-56X000

Clinch Pins:  
 Two Opposite Corner Pins **X = 0**  
 Four Corner Pins **X = 8**

| SPECIFY PLATING CODE XX= | 13 $\diamond$ | 93                | 43 $\diamond$  |
|--------------------------|---------------|-------------------|----------------|
| Sleeve (Pin)             | 10 $\mu$ " Au | 200 $\mu$ " Sn/Pb | 200 $\mu$ " Sn |
| Contact (Clip)           | 30 $\mu$ " Au | 30 $\mu$ " Au     | 30 $\mu$ " Au  |