


THIS DRAWING IS THE PROPERTY OF FCI. IT IS TO BE USED FOR THE MANUFACTURE OF THE PRODUCT SPECIFIED HEREIN ONLY. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF FCI.



FCI is a registered trademark of FCI. FCI is not responsible for any errors or omissions in this drawing. FCI is not responsible for any damage or loss of data resulting from the use of this drawing.

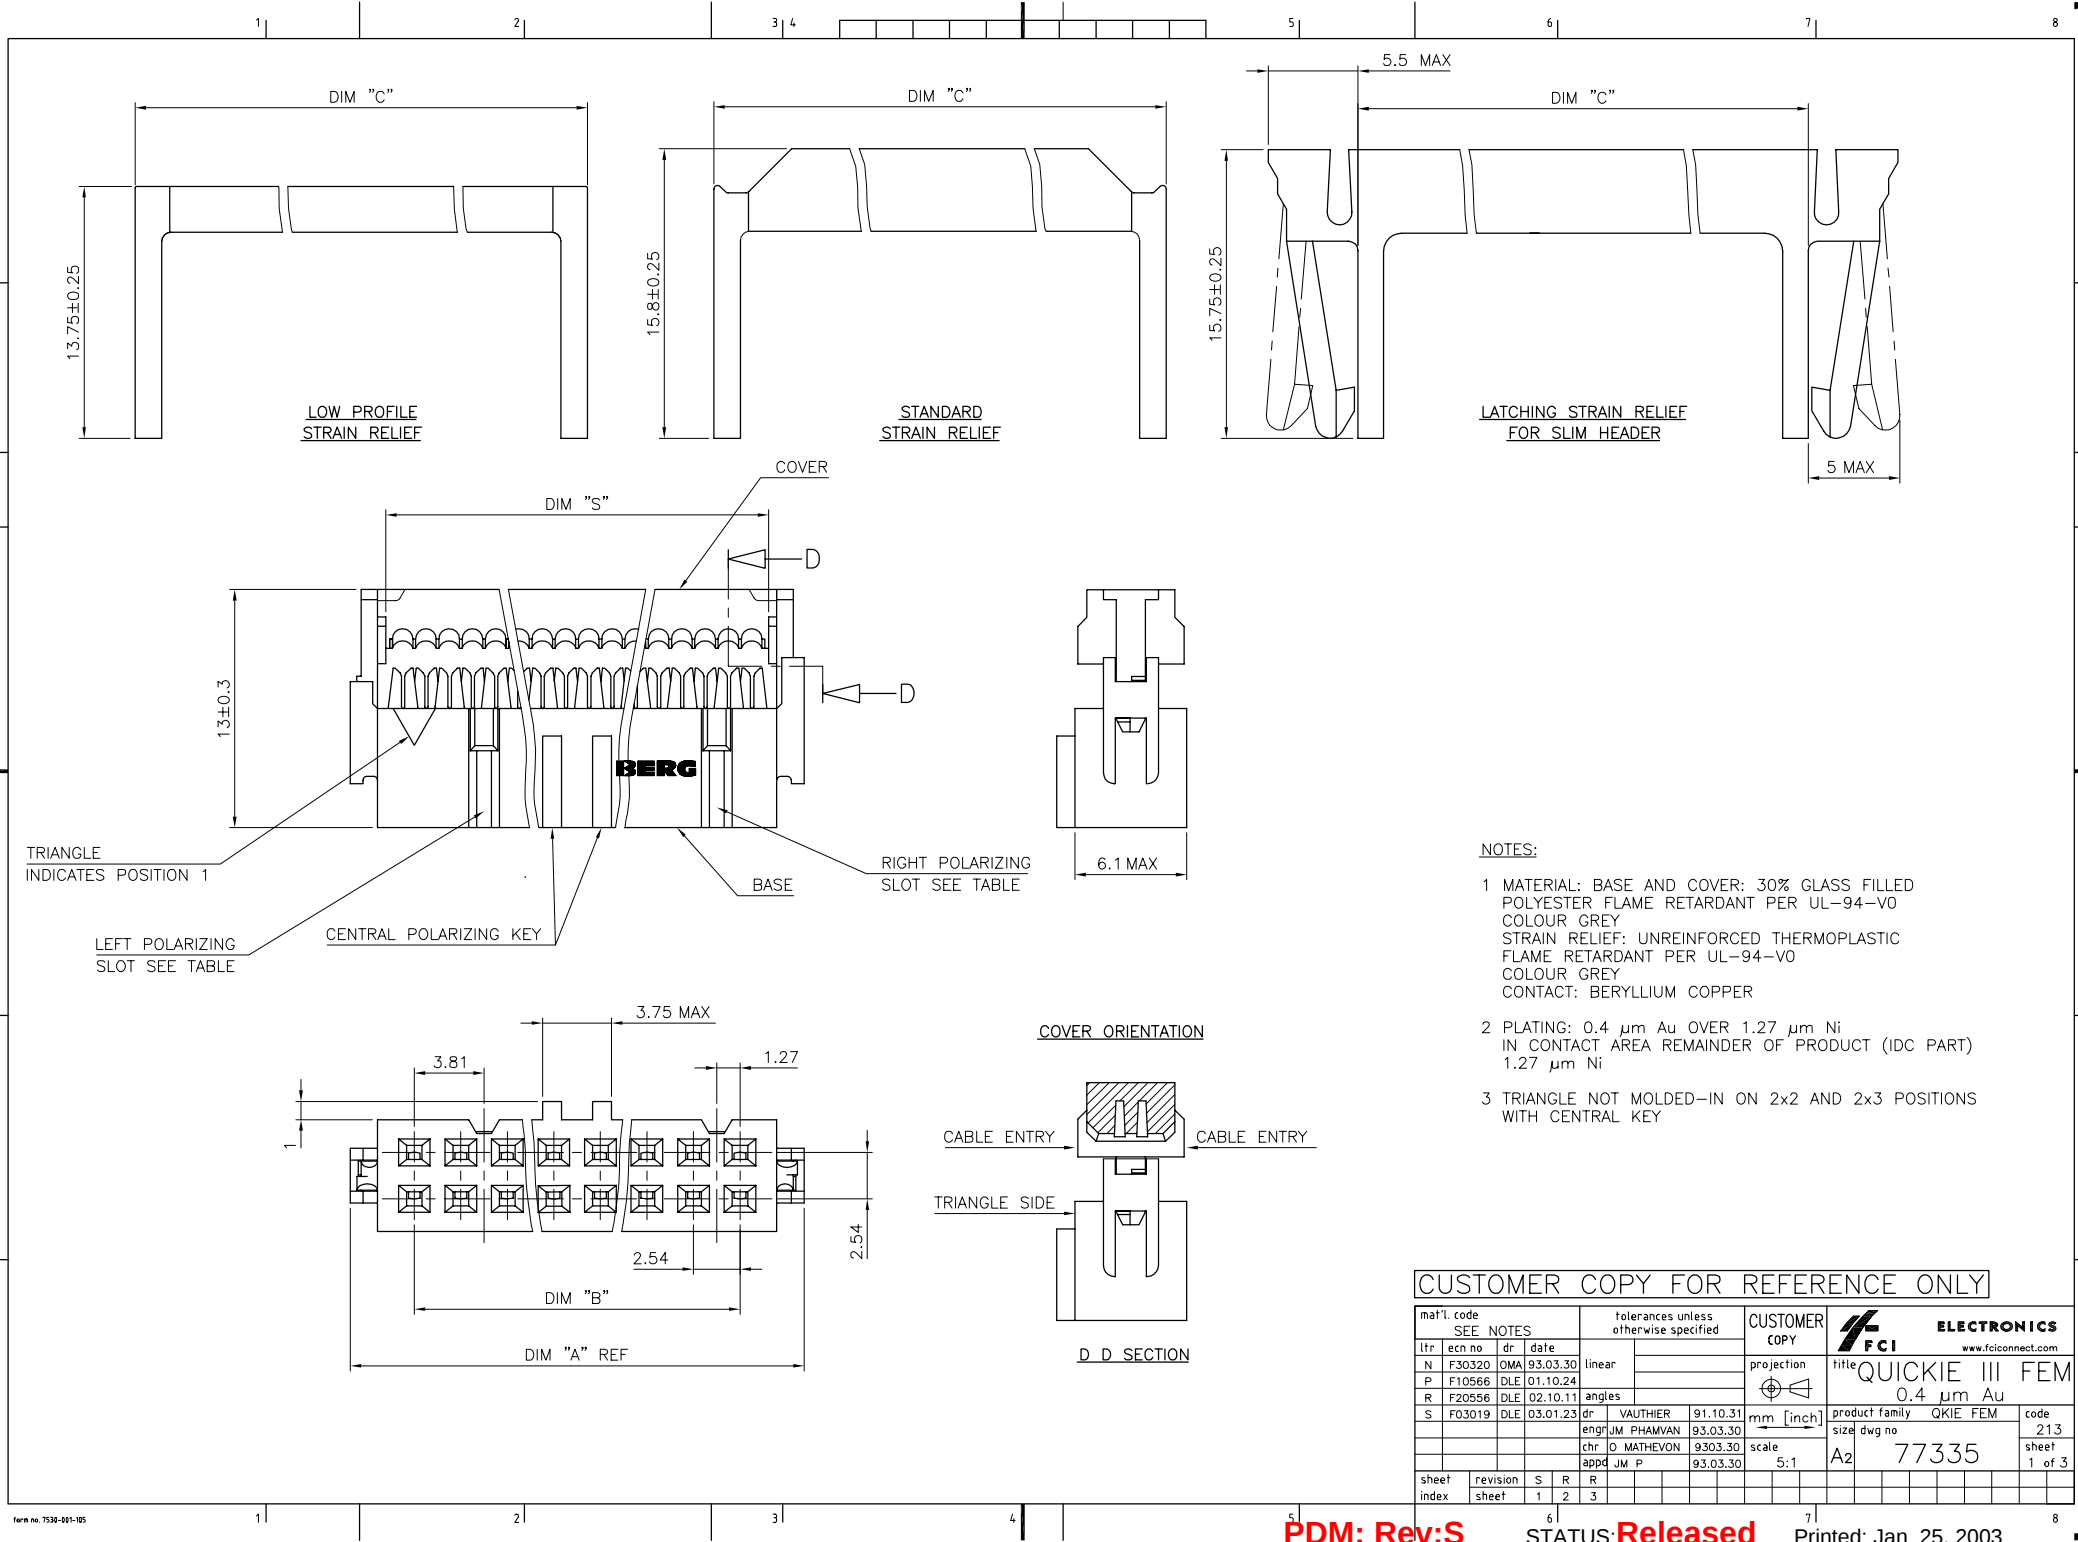


- NOTES:**
- 1 MATERIAL: BASE AND COVER: 30% GLASS FILLED POLYESTER FLAME RETARDANT PER UL-94-V0
COLOUR GREY
STRAIN RELIEF: UNREINFORCED THERMOPLASTIC FLAME RETARDANT PER UL-94-V0
COLOUR GREY
CONTACT: BERYLLIUM COPPER
 - 2 PLATING: 0.4 µm Au OVER 1.27 µm Ni
IN CONTACT AREA REMAINDER OF PRODUCT (IDC PART)
1.27 µm Ni
 - 3 TRIANGLE NOT MOLDED-IN ON 2x2 AND 2x3 POSITIONS WITH CENTRAL KEY


CUSTOMER COPY FOR REFERENCE ONLY									
mat'l. code		SEE NOTES		tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
ltr	ecr no	dr	date	linear		projection		title QUICKIE III FEM	
N	F30320	OMA	93.03.30					0.4 µm Au	
P	F10566	DLE	01.10.24					product family QKIE FEM	
R	F20556	DLE	02.10.11	angles				code 213	
S	F03019	DLE	03.01.23	dr	VAUTHIER	91.10.31	mm [inch]	size dwg no	
				engr	JM PHAMVAN	93.03.30		A2 77335	
				chr	O MATHEVON	93.03.30	scale	sheet 1 of 3	
				appd	JM P	93.03.30	5:1		
sheet index	revision sheet	S	R	R					
		1	2	3					

PRODUCT NUMBER	SIZE	DIM "A"	DIM "B"	DIM "C"	DIM "S"	SLOT STYLE
77335-X04	2x 2	9.54	2.54	9.46	5.66	NO SLOT
77335-X06	2x 3	12.08	5.08	12.00	8.20	RIGHT IF NO KEY
77335-X08	2x 4	14.62	7.62	14.54	10.74	RIGHT IF NO KEY
77335-X10	2x 5	17.16	10.16	17.08	13.28	RIGHT SLOT
77335-X14	2x 7	22.24	15.24	22.16	18.36	RIGHT SLOT
77335-X16	2x 8	24.78	17.78	24.70	20.90	2 SLOTS
77335-X18	2x 9	27.32	20.32	27.24	23.44	2 SLOTS
77335-X20	2x 10	29.86	22.86	29.78	25.98	2 SLOTS
77335-X24	2x 12	34.94	27.94	34.85	31.06	2 SLOTS
77335-X26	2x 13	37.48	30.48	37.40	33.60	2 SLOTS
77335-X30	2x 15	42.56	35.56	42.48	38.68	2 SLOTS
77335-X34	2x 17	47.64	40.64	47.56	43.76	2 SLOTS
77335-X40	2x 20	55.26	48.26	55.18	51.38	2 SLOTS
77335-X44	2x 22	60.34	53.34	60.26	56.46	2 SLOTS
77335-X50	2x 25	67.96	60.96	67.88	64.08	2 SLOTS
77335-X60	2x 30	80.66	73.66	80.58	76.78	2 SLOTS
77335-X64	2x 32	85.74	78.74	85.66	81.86	2 SLOTS


AFTER TERMINATION SIDE VIEW OF ASSEMBLY (* LATCHING DIM ON HEADER)

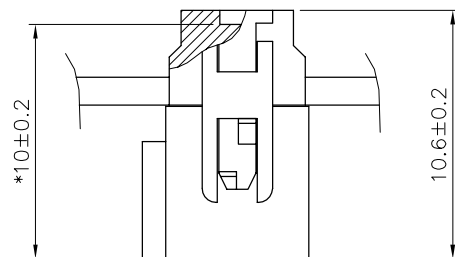


WITHOUT STRAIN RELIEF

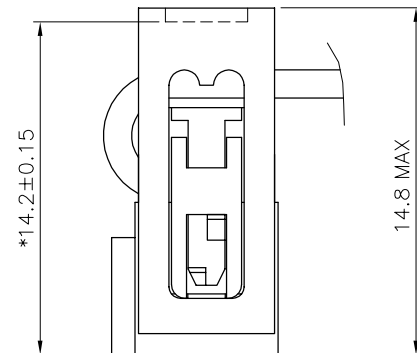

WITH LOW PROFILE STRAIN RELIEF

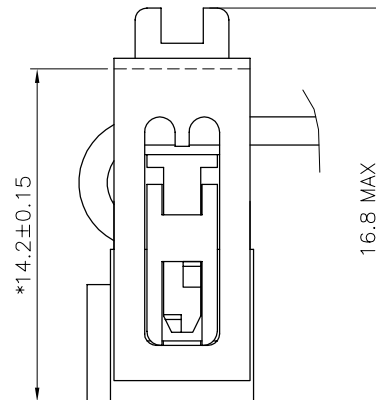

WITH STANDARD STRAIN RELIEF

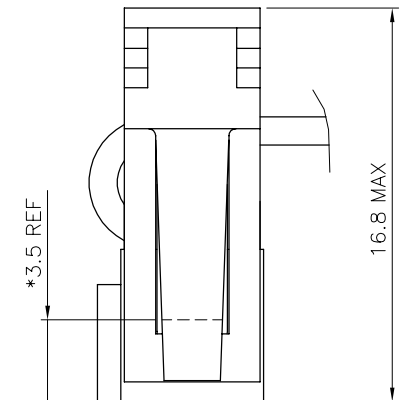


WITH LATCHING STRAIN RELIEF

77335-814	●						●	
77335-7YY		●				●		
77335-6YY	●					●		
77335-5YY		●			●			504 530
77335-4YY		●		●				
77335-3YY		●	●					304
77335-2YY	●				●			204 230
77335-1YY	●			●				
77335-0YY	●		●					004
PRODUCT NUMBER	WITH CENTRAL KEY	WITHOUT CENTRAL KEY	STANDARD	WITHOUT	LOW PROFILE	LATCHING	STANDARD FULL	DASHES NOT AVAILABLE
			STRAIN RELIEF					


mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
ltr	ecr no	dr	date	linear		projection		title	QUICKIE III FEM
N	F30320	OMA	93.03.30					0.4 μm Au	
P	F10566	DLE	01.10.24					product family	QKIE FEM
R	F03019	DLE	03.01.23	angles				code	213
				dr	VAUTHIER	91.10.31	mm [inch]	scale	N/A
				engr	JM PHAMVAN	93.03.30		size	A2
				chr	O MATHEVON	93.03.30		sheet	2 of 2
				appd	JM P	93.03.30			
sheet	revision								
index	sheet								

PRODUCT NUMBER	SIZE	DIM "A"	DIM "B"	DIM "C"	DIM "S"	SLOT STYLE
77335-X04B	2x 2	9.54	2.54	9.46	5.66	NO SLOT
77335-X06B	2x 3	12.08	5.08	12.00	8.20	RIGHT IF NO KEY
77335-X08B	2x 4	14.62	7.62	14.54	10.74	RIGHT IF NO KEY
77335-X10B	2x 5	17.16	10.16	17.08	13.28	RIGHT SLOT
77335-X14B	2x 7	22.24	15.24	22.16	18.36	RIGHT SLOT
77335-X16B	2x 8	24.78	17.78	24.70	20.90	2 SLOTS
77335-X18B	2x 9	27.32	20.32	27.24	23.44	2 SLOTS
77335-X20B	2x 10	29.86	22.86	29.78	25.98	2 SLOTS
77335-X24B	2x 12	34.94	27.94	34.85	31.06	2 SLOTS
77335-X26B	2x 13	37.48	30.48	37.40	33.60	2 SLOTS
77335-X30B	2x 15	42.56	35.56	42.48	38.68	2 SLOTS
77335-X34B	2x 17	47.64	40.64	47.56	43.76	2 SLOTS
77335-X40B	2x 20	55.26	48.26	55.18	51.38	2 SLOTS
77335-X44B	2x 22	60.34	53.34	60.26	56.46	2 SLOTS
77335-X50B	2x 25	67.96	60.96	67.88	64.08	2 SLOTS
77335-X60B	2x 30	80.66	73.66	80.58	76.78	2 SLOTS
77335-X64B	2x 32	85.74	78.74	85.66	81.86	2 SLOTS


AFTER TERMINATION SIDE VIEW OF ASSEMBLY (* LATCHING DIM ON HEADER)

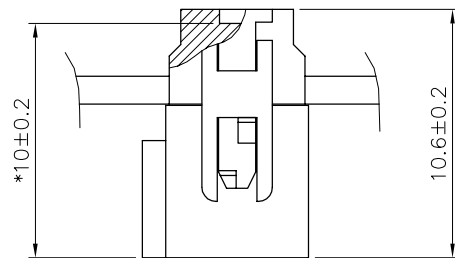


WITHOUT STRAIN RELIEF

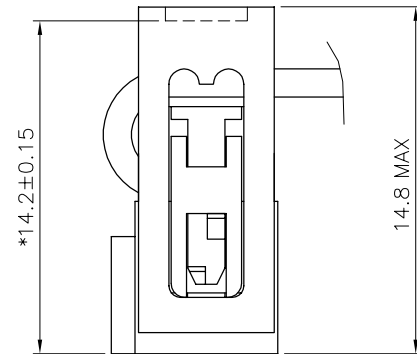

WITH LOW PROFILE STRAIN RELIEF

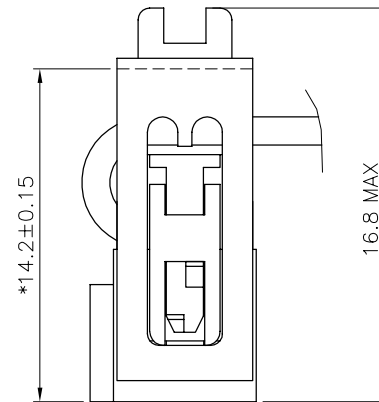

WITH STANDARD STRAIN RELIEF

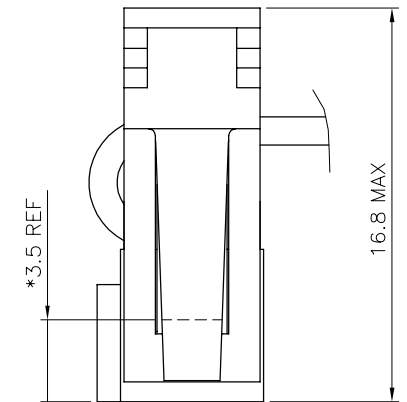

WITH LATCHING STRAIN RELIEF

77335-7YYB		●				●	724
77335-6YYB	●					●	624
77335-5YYB		●			●		504 524 530
77335-4YYB		●		●			
77335-3YYB		●	●				304
77335-2YYB	●				●		204 224 230
77335-1YYB	●			●			
77335-0YYB	●		●				004
PRODUCT NUMBER	WITH CENTRAL KEY	WITHOUT CENTRAL KEY	STANDARD	WITHOUT	LOW PROFILE	LATCHING	DASHES NOT AVAILABLE
STRAIN RELIEF							

NOTE:
4 CODE FOR YEAR AND WEEK OF MANUFACTURING

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		ELECTRONICS www.fciconnect.com	
lfr	ecr no	dr	date	linear		projection		title	QUICKIE III FEM		
N	F30320	OMA	93.03.30			mm [inch]		product family	QKIE FEM		code
P	F10566	DLE	01.10.24			scale		size	dwg no		213
R	F03019	DLE	03.01.23	angles		N/A		A2	77335		sheet 3 of ~
sheet index	revision sheet										