




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	NO. OF FIBER STRANDS	n	MINIMUM LENGTH	WEIGHT
F64D5-5Mn	4	1	1 METER	.362 lbs/10 PCS (164 g/10 PCS)
F66D5-5Mn	6	2	2 METER	.547 lbs/10 PCS (248 g/10 PCS)
F68D5-5Mn	8	3	3 METER	.732 lbs/10 PCS (332 g/10 PCS)
F612D5-5Mn	12	5	5 METER	1.102 lbs/10 PCS (500 g/10 PCS)
		10	10 METER	2.029 lbs/10 PCS (920 g/10 PCS)

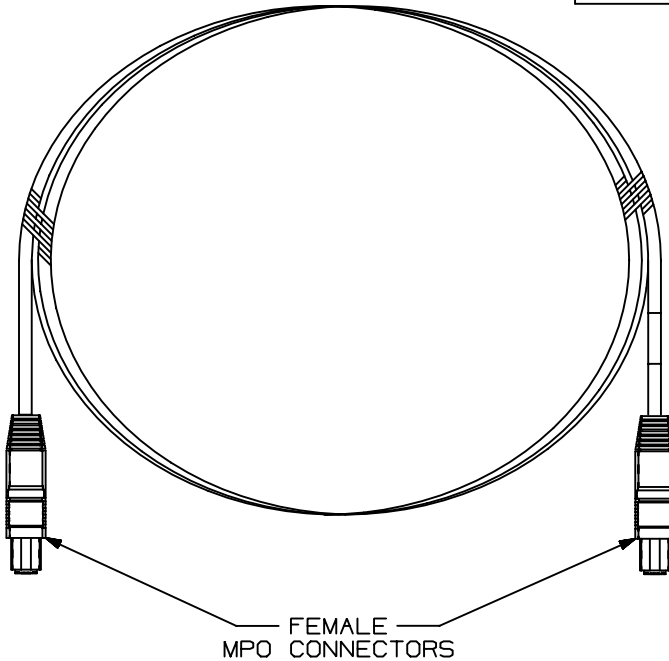

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE PACKAGE QUANTITY.
2. CONSTRUCTED WITH PLENUM RATED, 62.5/125 MICRON MULTIMODE RIBBON CABLE.
3. TERMINATED WITH FEMALE MPO CONNECTORS, ASSEMBLED WITH TEMPERATURE CURED EPOXY.
4. CABLE JACKET COLOR IS TO BE ORANGE.
5. THE MAXIMUM INSERTION LOSS PER CONNECTOR IS .75 dB.
6. DIMENSIONS IN PARENTHESES ARE METRIC.

DRAWING FILENAME		M00929BM_DC_00A.PRT		SIZE	A
FIBER OPTIC MULTIMODE MPO PATCH CORD MPO TO MPO (FEMALE) CONFIGURATION (F6xD5-5Mn) CUSTOMER DRAWING					
 PANDUIT ™ CORP. TINLEY PARK, ILL 60477				I.I. NUMBER	
				PRODUCT SPEC	
 THIRD ANGLE PROJECTION				WORK INSTRUCTION	
				SCALE	
DRAWN BY				PART NO.	
MC				F6xD5-5Mn	
DATE				AS NOTED	
10-10-01					
CHK'D				DRAWING NO.	
				00929-18	

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	10-10-01	MC		RELEASED TO PRODUCTION	00929-18				