



ASH-20 Series Pitch 9.5mm

Specifications


BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0), BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 14-22 STR.
 RATING: 15 AMPERE, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE


ASH-200

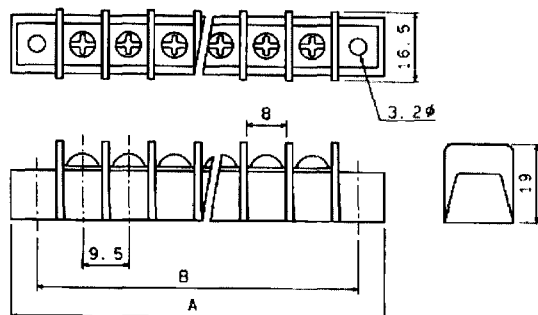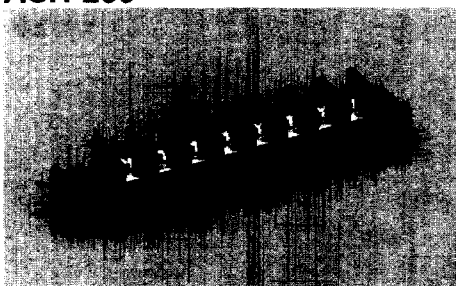



ASH-201

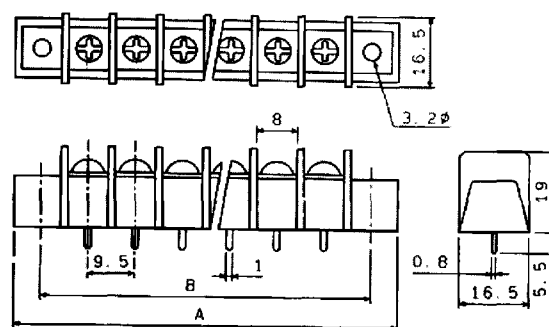

ASH-202


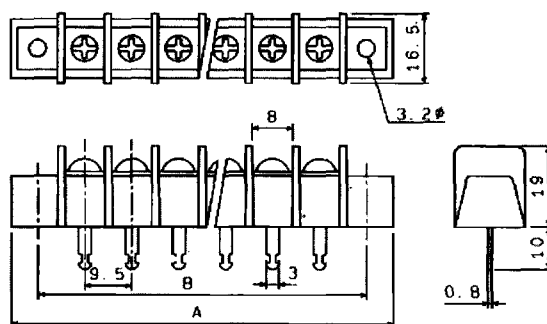


ASH-203

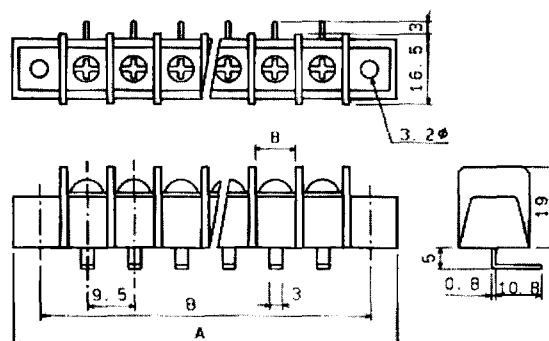
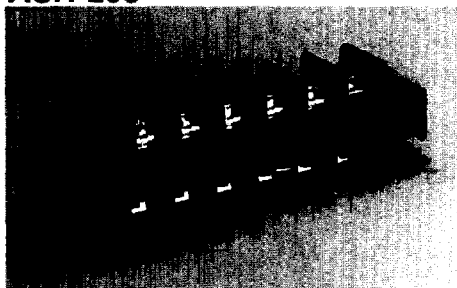


ASH-20 Series Continued....


ASH-204

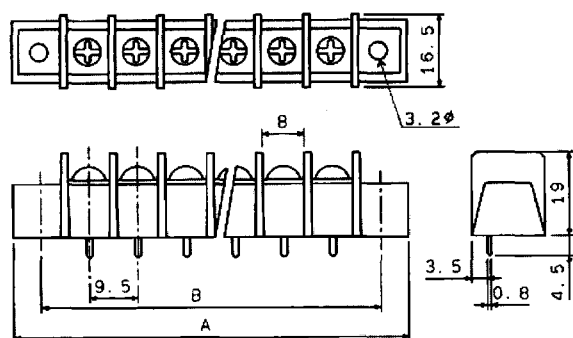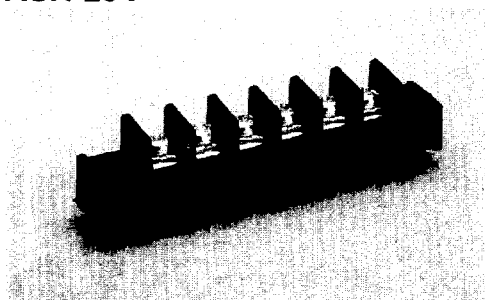

ASH-205

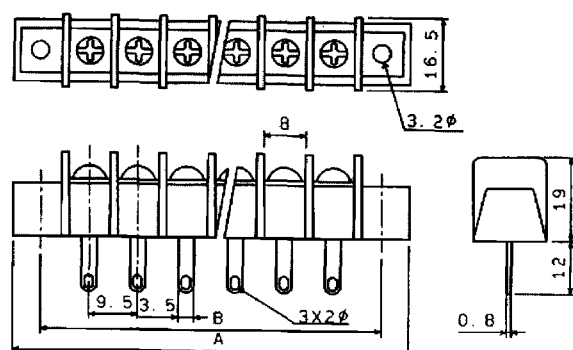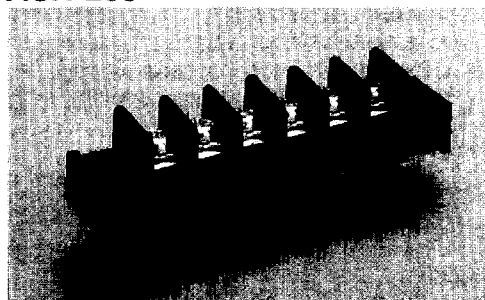

ASH-206

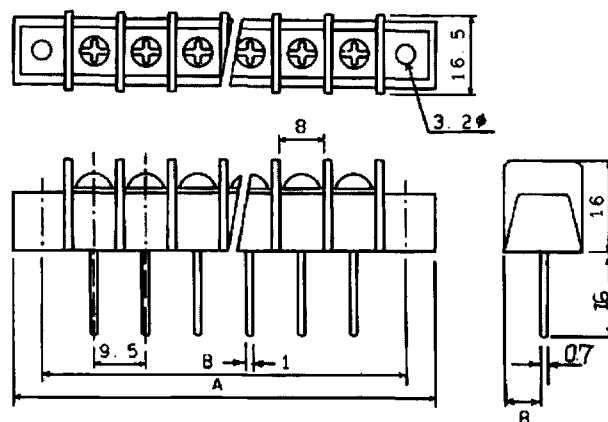

DIMENSION: ±0.8mm

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	40	49	59	68	78	87	97	106	116	125	135	144	156	164	173
B	28	38	48	57	67	76.5	86.5	96	105	114.5	124.5	134	143.5	153	162

POLE	17	18	19	20	21	22	23	24	25	26	27	28	29
A	182	192	201	211	220	230	240	249	259	268	277	287	297
B	172	182	191.5	200.5	210	219.5	229	239	258	248.5	267.5	277.5	287