




CONTACT PART NUMBER (XXXXY)	CLIP/SHELL PLATING	"T" TAIL LENGTH	"B" BODY LENGTH	"C" DIM.	INSERTION FORCE	EXTRACTION FORCE	NO. OF FINGERS	REF. CLIP NO.
187B5	30 u" GOLD/200 u" TIN	.108	.122	.030 DIA.	35 G ULTRA LOW	20 G	6	6 (35)
012B1	10 u" GOLD/200 u" TIN	.125	.165	.020 DIA.	65 G VERY LOW	28 G	6	6 (32)
003B1	30 u" GOLD/200 u" TIN	.125	.165	.020 DIA.	65 G VERY LOW	28 G	6	6 (32)
004B1	30 u" GOLD/10 u" GOLD	.125	.165	.020 DIA.	65 G VERY LOW	28 G	6	6 (32)
008B5	10 u" GOLD/200 u" TIN	.125	.165	.020 DIA.	35 G ULTRA LOW	20 G	6	6 (35)
009B5	30 u" GOLD/200 u" TIN	.125	.165	.020 DIA.	35 G ULTRA LOW	20 G	6	6 (35)
010B5	30 u" GOLD/10 u" GOLD	.125	.165	.020 DIA.	35 G ULTRA LOW	20 G	6	6 (35)
026B5	30 u" GOLD/200 u" TIN	.150	.165	.020 DIA.	35 G ULTRA LOW	20 G	6	6 (35)

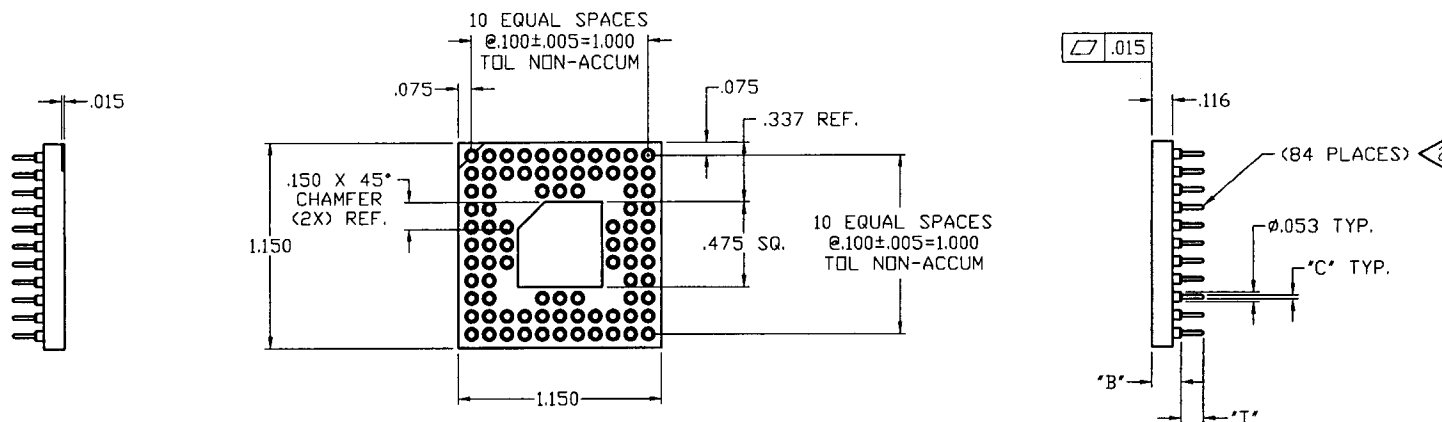

NOTES:

- INSULATOR MATERIAL:
GLASS REINFORCED POLYPHENYLENE SULFIDE (PPS)
UL 94V-0, COLOR BLACK.
- CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD PER QQ-B-626.
INNER CONTACT: BERYLLIUM COPPER, ALLOY 172 PER QQ-C-533.

PART NUMBER (SEE TABLE)
PGA84HXXXXY-1109R

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI Electronics	
ltr	ecr no	dr	date	linear	angles		title	www.fciconnect.com
A	V00799	DLW	3/17/00	.XX ±.01	.XXX ±.005	projection	84 POSITIONS PGA (11 X 11) SOCKET	
				.XXXX ±.0020	0° ±2°	INCH	product family PGA	code
				dr D. WOLFORD 3/17/00	enr A. VASBINDER 3/17/00	scale 1:1	size dwg no	sheet 1 of 1
				chr A. VASBINDER 3/17/00	appd A. VASBINDER 3/17/00		A 58313	
sheet index	revision sheet	A 1						

cage code
22526

ACAD

PDM: Rev:A

STATUS:Released

Printed: Feb 04, 2006