



Series 6208



- Number of Contacts – 5-30
- Tray Packaged, Tube or Tape & Reel
- Voltage – 50 V
- Current Rating – 1.0 amp max.
- Dielectric Withstanding Voltage – 500V RMS min.
- Operating Temperature – (-30°C - +85°C)
- Contact Material – phosphor bronze (tin-lead plated)
- Slider Material – PPS (UL 94 V-O)
- Insulator Material – glass-filled nylon, PPS
- FFC/FPC Thickness – 0.3 ±0.05 mm (0.012 ±0.002")
- PCB Thickness – 1.2-1.6mm .047 ~ .063"
- Profile Height – See “E” dimension

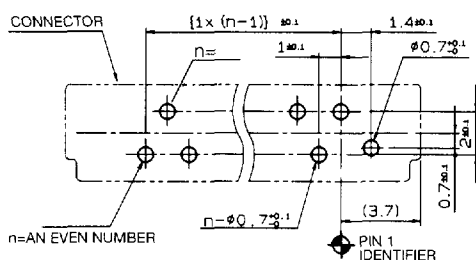

MOUNTING LAYOUT

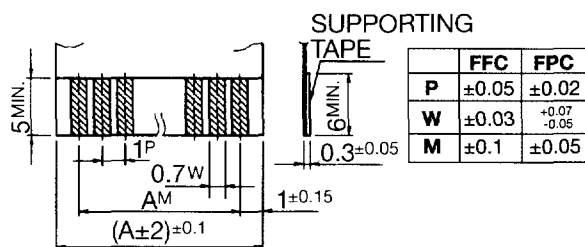

FFC, FPC SPECIFICATION

PART NUMBER	NO. OF CONTACTS	A	B	C	D	E	F	G	QTY. PER TUBE	QTY. PER TRAY
XX 6208 XX0105 001	5	4.0	10.4	11.4	3.4	5.0	6.5	.08	42	310
↑ 106	6	5.0	11.4	12.4	↑	↑	↑	↑	38	290
107	7	6.0	12.4	13.4					35	260
108	8	7.0	13.4	14.4					33	250
109	9	8.0	14.4	15.4					31	230
110	10	9.0	15.4	16.4					29	220
111	11	10.0	16.4	17.4					27	200
112	12	11.0	17.4	18.4					26	190
113	13	12.0	18.4	19.4					24	180
114	14	13.0	19.4	20.4					23	170
115	15	14.0	20.4	21.4					22	160
116	16	15.0	21.4	22.4					21	150
117	17	16.0	22.4	23.4					20	150
118	18	17.0	23.4	24.4					19	140
119	19	18.0	24.4	25.4	↓	↓	↓	↓	18	140
120	20	19.0	25.4	26.4	3.4	5.0	6.5	0.8	18	130
121	21	20.0	26.4	27.4	3.6	5.2	6.7	1.0	17	130
122	22	21.0	27.4	28.4	↑	↑	↑	↑	17	120
123	23	22.0	28.4	29.4	↑	↑	↑	↑	16	120
124	24	23.0	29.4	30.4	↑	↑	↑	↑	16	110
125	25	24.0	30.4	31.4	3.6	5.2	6.7	1.0	15	110
126	26	25.0	31.4	32.4	3.9	5.5	7.0	1.3	15	110
127	27	26.0	32.4	33.4	↑	↑	↑	↑	14	100
128	28	27.0	33.4	34.4	↑	↑	↑	↑	14	100
129	29	28.0	34.4	35.4	↑	↑	↑	↑	13	100
XX 6208 XX0130 001	30	29.0	35.4	36.4	3.9	5.5	7.0	1.3	13	90

(Dimensions: mm)

ORDERING CODE

XX 6208 XX0 1XX 001

NUMBER OF CONTACTS (05-30)

NUMBER OF CON
0:WITHOUT BOSS

1:WITH BOSS (1 Place)

0:WITH KINKED LEGS (Preferred option)

1:WITHOUT KINKED LEGS

- 08=TUBE PACKAGE

(WITHOUT KINKED LEGS/BOSS)

00=TRAY PACKAGE