


Single-Conductor PCB Terminal Strips, with Test Slot, Series 235, Pin Spacings 5/5.08 mm / 0.2 in; 7.5/7.62 mm / 0.3 in; 10/10.16 mm / 0.4 in Side-entry



2
73

Pin spacing 5/5.08 mm / 0.2 in
0.5 – 2.5 mm² "s" | AWG 20–14 "sol."
(1.5 mm² "s" w. push bu.)
250 V/4 kV/3, 10 A | 300 V, 10 A
500 V/4 kV/2, 10 A
 9 – 10 mm / 0.37 in




*

Pin spacing 7.5/7.62 mm / 0.3 in
0.5 – 2.5 mm² "s" | AWG 20–14 "sol."
(1.5 mm² "s" w. push bu.)
400 V/6 kV/3, 10 A | 300 V, 10 A
800 V/6 kV/2, 10 A
 9 – 10 mm / 0.37 in

*

Pin spacing 10/10.16 mm / 0.4 in
0.5 – 2.5 mm² "s" | AWG 20–14 "sol."
(1.5 mm² "s" w. push bu.)
500 V/6 kV/3, 10 A | 300 V, 10 A
1000 V/6 kV/2, 10 A
 9 – 10 mm / 0.37 in

*

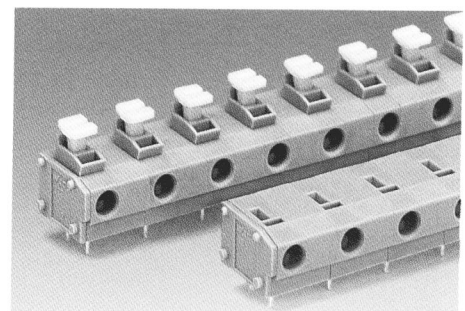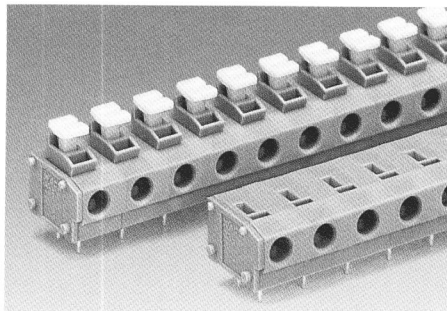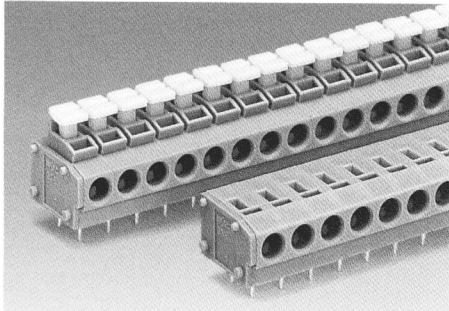


No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Single-cond. terminal strips with push buttons, 2 solder pins/pole, with test slot, grey, stand. lengths			Single-cond. terminal strips with push buttons, 2 solder pins/pole, with test slot, grey, stand. lengths			Single-cond. terminal strips with push buttons, 2 solder pins/pole, with test slot, grey, stand. lengths		
2	235-402/332-000	420 (4 x 105)	2	235-502/332-000	280 (4 x 70)	2	235-802/332-000	220 (4 x 55)
3	235-403/332-000	280 (4 x 70)	3	235-503/332-000	200 (4 x 50)	3	235-803/332-000	160 (4 x 40)
4	235-404/332-000	220 (4 x 55)	4	235-504/332-000	160 (4 x 40)	4	235-804/332-000	120 (4 x 30)
5	235-405/332-000	180 (4 x 45)	5	235-505/332-000	120 (4 x 30)	5	235-805/332-000	80 (4 x 20)
6	235-406/332-000	140 (4 x 35)	6	235-506/332-000	100 (4 x 25)	6	235-806/332-000	80 (4 x 20)
7	235-407/332-000	120 (4 x 30)	7	235-507/332-000	80 (4 x 20)	7	235-807/332-000	60 (4 x 15)
8	235-408/332-000	100 (4 x 25)	8	235-508/332-000	80 (4 x 20)	8	235-808/332-000	60 (4 x 15)
9	235-409/332-000	100 (4 x 25)	9	235-509/332-000	60 (4 x 15)	9	235-809/332-000	40 (4 x 10)
10	235-410/332-000	80 (4 x 20)	10	235-510/332-000	60 (4 x 15)	10	235-810/332-000	40 (4 x 10)
12	235-412/332-000	80 (4 x 20)	12	235-512/332-000	40 (4 x 10)	12	235-812/332-000	40 (4 x 10)
16	235-416/332-000	60 (4 x 15)	16	235-516/332-000	40 (4 x 10)	16	235-816/332-000	20 (4 x 5)
24	235-424/332-000	40 (4 x 10)	24	235-524/332-000	20 (4 x 5)	24	235-824/332-000	20 (4 x 5)
36	235-436/332-000	20 (4 x 5)						
48	235-448/332-000	20 (4 x 5)						
Single-cond. terminal strips without push buttons, 2 solder pins/pole, with test slot, grey, stand. lengths			Single-cond. terminal strips without push buttons, 2 solder pins/pole, with test slot, grey, stand. lengths			Single-cond. terminal strips without push buttons, 2 solder pins/pole, with test slot, grey, stand. lengths		
2	235-402/333-000	420 (4 x 105)	2	235-502/333-000	280 (4 x 70)	2	235-802/333-000	220 (4 x 55)
3	235-403/333-000	280 (4 x 70)	3	235-503/333-000	200 (4 x 50)	3	235-803/333-000	160 (4 x 40)
4	235-404/333-000	220 (4 x 55)	4	235-504/333-000	160 (4 x 40)	4	235-804/333-000	120 (4 x 30)
5	235-405/333-000	180 (4 x 45)	5	235-505/333-000	120 (4 x 30)	5	235-805/333-000	80 (4 x 20)
6	235-406/333-000	140 (4 x 35)	6	235-506/333-000	100 (4 x 25)	6	235-806/333-000	80 (4 x 20)
7	235-407/333-000	120 (4 x 30)	7	235-507/333-000	80 (4 x 20)	7	235-807/333-000	60 (4 x 15)
8	235-408/333-000	100 (4 x 25)	8	235-508/333-000	80 (4 x 20)	8	235-808/333-000	60 (4 x 15)
9	235-409/333-000	100 (4 x 25)	9	235-509/333-000	60 (4 x 15)	9	235-809/333-000	40 (4 x 10)
10	235-410/333-000	80 (4 x 20)	10	235-510/333-000	60 (4 x 15)	10	235-810/333-000	40 (4 x 10)
12	235-412/333-000	80 (4 x 20)	12	235-512/333-000	40 (4 x 10)	12	235-812/333-000	40 (4 x 10)
16	235-416/333-000	60 (4 x 15)	16	235-516/333-000	40 (4 x 10)	16	235-816/333-000	20 (4 x 5)
24	235-424/333-000	40 (4 x 10)	24	235-524/333-000	20 (4 x 5)	24	235-824/333-000	20 (4 x 5)
36	235-436/333-000	20 (4 x 5)						
48	235-448/333-000	20 (4 x 5)						

For other lengths, please contact factory.


For other lengths, please contact factory.

For other lengths, please contact factory.


Dimensions (in mm) (Adjustment of pin spacing is made by pulling on the end blocks so that they expand to satisfy the hole centers required.)

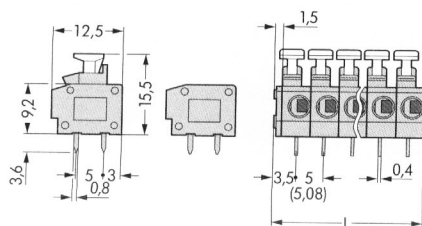

Diameter of drilled hole: 1^{+0.1} mm
L = (No. of poles x pin spacing) + 1.5 mm

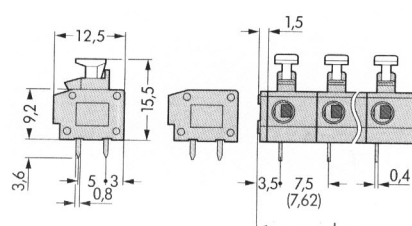

Diameter of drilled hole: 1^{+0.1} mm
L = (No. of poles x pin spacing) + 1.5 mm

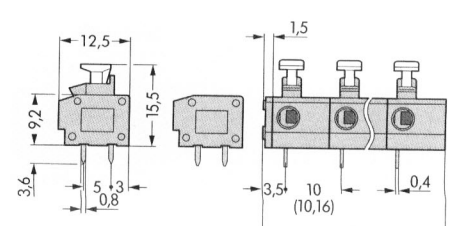

Diameter of drilled hole: 1^{+0.1} mm
L = (No. of poles x pin spacing) + 1.5 mm