

# Terminal strips for printed circuit boards

## type 8235

## 12 AWG


## spacing 5.08 mm

### UL Ratings:


- 12-30 AWG 30A(factory)
- 12-22 AWG 20A(field)
- 300V

### CSA Ratings:


- 12-22 AWG 25A
- 300V




clamp direction  
35° angled to  
PC board

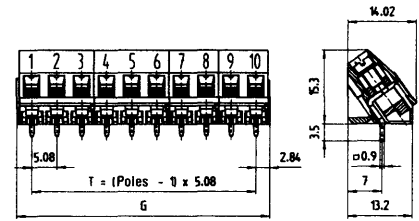

without insulating plate

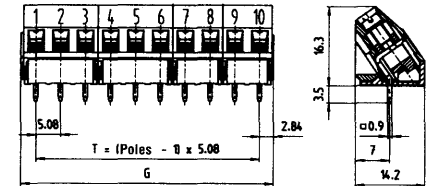


with insulating plate  
without fixing bolts

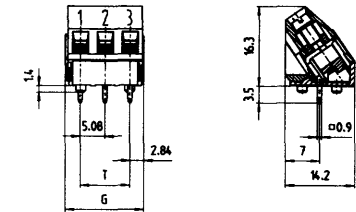


with insulating plate  
with fixing bolts

bore hole plan for version  
with fixing bolts

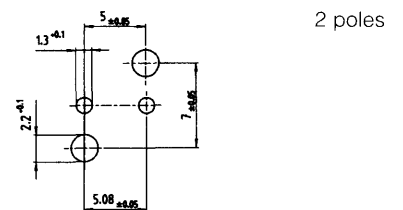

2 poles

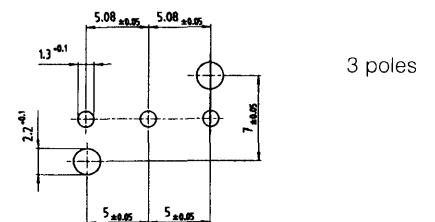

3 poles

See accessories page 171

Wire strip length: 6.5mm

G	T	Poles	part no. marked		
			with insulating plate with fixing bolts	with insulating plate without fixing bolts	without insulating plate
11.01	5.08	2	25.522.6253.0	25.522.3253.0	25.522.0253.0
16.09	10.16	3	25.522.6353.0	25.522.3353.0	25.522.0353.0
21.17	15.24	4		25.522.3453.0	25.522.0453.0
26.25	20.32	5		25.522.3553.0	25.522.0553.0
31.33	25.40	6		25.522.3653.0	25.522.0653.0
36.41	30.48	7		25.522.3753.0	25.522.0753.0
41.49	35.36	8		25.522.3853.0	25.522.0853.0
46.57	40.64	9		25.522.3953.0	25.522.0953.0
51.65	45.72	10		25.522.4053.0	25.522.1053.0
56.73	50.80	11		25.522.4153.0	25.522.1153.0
61.81	55.88	12		25.522.4253.0	25.522.1253.0
66.89	60.96	13		25.522.4353.0	25.522.1353.0
71.97	66.04	14		25.522.4453.0	25.522.1453.0
77.05	71.12	15		25.522.4553.0	25.522.1553.0
82.13	76.20	16		25.522.4653.0	25.522.1653.0
87.21	81.28	17		25.522.4753.0	25.522.1753.0
92.29	86.26	18		25.522.4853.0	25.522.1853.0
97.37	91.44	19		25.522.4953.0	25.522.1953.0
102.45	96.52	20		25.522.5053.0	25.522.2053.0
107.53	101.60	21		25.522.5153.0	25.522.2153.0
112.61	106.61	22		25.522.5253.0	25.522.2253.0
117.69	111.76	23		25.522.5353.0	25.522.2353.0
122.77	116.84	24		25.522.5453.0	25.522.2453.0

G	T	Poles	part no. unmarked		
11.01	5.08	2	25.523.6253.0	25.523.3253.0	25.523.0253.0
16.09	10.16	3	25.523.6353.0	25.523.3353.0	25.523.0353.0
21.17	15.24	4		25.523.3453.0	25.523.0453.0
26.25	20.32	5		25.523.3553.0	25.523.0533.0
31.33	25.40	6		25.523.3653.0	25.523.0653.0
36.41	30.48	7		25.523.3753.0	25.523.0753.0
41.49	35.36	8		25.523.3853.0	25.523.0853.0
46.57	40.64	9		25.523.3953.0	25.523.0953.0
51.65	45.72	10		25.523.4053.0	25.523.1053.0
56.73	50.80	11		25.523.4153.0	25.523.1153.0
61.81	55.88	12		25.523.4253.0	25.523.1253.0
66.89	60.96	13		25.523.4353.0	25.523.1353.0
71.97	66.04	14		25.523.4453.0	25.523.1453.0
77.05	71.12	15		25.523.4553.0	25.523.1553.0
82.13	76.20	16		25.523.4653.0	25.523.1653.0
87.21	81.28	17		25.523.4753.0	25.523.1753.0
92.29	86.26	18		25.523.4853.0	25.523.1853.0
97.37	91.44	19		25.523.4953.0	25.523.1953.0
102.45	96.52	20		25.523.5053.0	25.523.2053.0
107.53	101.60	21		25.523.5153.0	25.523.2153.0
112.61	106.61	22		25.523.5253.0	25.523.2253.0
117.69	111.76	23		25.523.5353.0	25.523.2353.0
122.77	116.84	24		25.523.5453.0	25.523.2453.0