



# DYNAMATE™ RECEPTACLES & CABLE TYPES

## PLUG RECEPTACLE

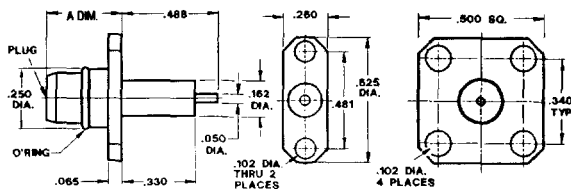


| PART NUMBER    | TYPE                | FREQUENCY GHz | A DIM. |
|----------------|---------------------|---------------|--------|
| 2852-0031-6248 | 2 HOLE FLANGE MOUNT | DC-20.0       | .375   |
| 2854-0031-6248 | 4 HOLE FLANGE MOUNT | DC-20.0       | .375   |
| 2852-0031-6249 | 2 HOLE FLANGE MOUNT | DC-20.0       | .390   |
| 2854-0031-6249 | 4 HOLE FLANGE MOUNT | DC-20.0       | .390   |

## JACK RECEPTACLE

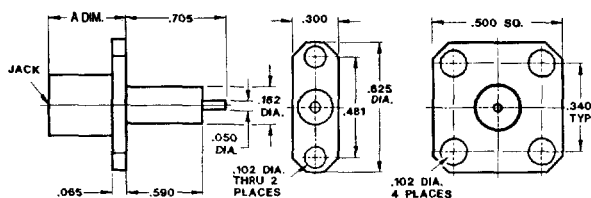


| PART NUMBER    | TYPE                | FREQUENCY GHz | A DIM. |
|----------------|---------------------|---------------|--------|
| 2952-0031-6248 | 2 HOLE FLANGE MOUNT | DC-20.0       | .375   |
| 2954-0031-6248 | 4 HOLE FLANGE MOUNT | DC-20.0       | .375   |
| 2952-0031-6249 | 2 HOLE FLANGE MOUNT | DC-20.0       | .390   |
| 2954-0031-6249 | 4 HOLE FLANGE MOUNT | DC-20.0       | .390   |

## CABLE PLUG

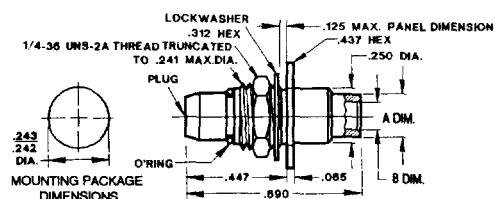


| PART NUMBER    | BULKHEAD REAR MOUNT | FREQUENCY GHz | A DIM. | B DIM. |
|----------------|---------------------|---------------|--------|--------|
| 2810-4121-6450 | DIRECT SOLDER       | .141 DC-20.0  | .180   | .143   |
| 2810-8521-6450 | DIRECT SOLDER       | .085 DC-26.5  | .120   | .089   |

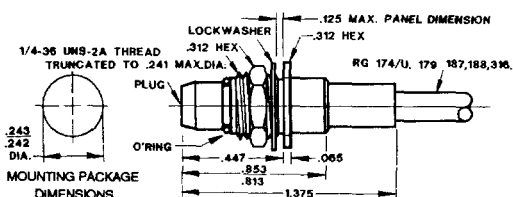


| PART NUMBER    | BULKHEAD REAR MOUNT         | FREQUENCY GHz |
|----------------|-----------------------------|---------------|
| 2810-4231-6231 | RG55/U, 142, 223, 400       | DC-18.0       |
| 2810-1630-6231 | RG174/U, 179, 187, 188, 316 | DC-18.0       |

## CABLE JACK

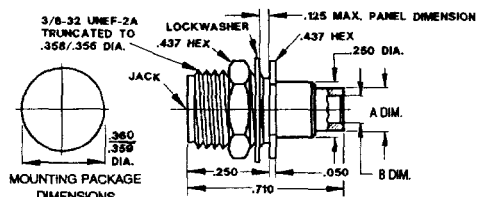

| PART NUMBER    | BULKHEAD REAR MOUNT | FREQUENCY GHz | A DIM. | B DIM. |
|----------------|---------------------|---------------|--------|--------|
| 2910-4121-6450 | DIRECT SOLDER       | .141 DC-20.0  | .180   | .143   |
| 2910-8521-6450 | DIRECT SOLDER       | .085 DC-26.5  | .120   | .089   |

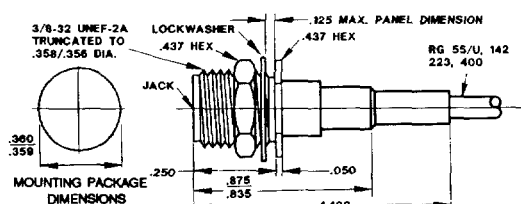

| PART NUMBER    | BULKHEAD REAR MOUNT         | FREQUENCY GHz |
|----------------|-----------------------------|---------------|
| 2910-4230-6231 | RG55/U, 142, 223, 400       | DC-18.0       |
| 2910-1630-6231 | RG174/U, 179, 187, 188, 400 | DC-18.0       |