

4N29, 29A, 30, 31, 4N32, 32A, 33(Short)


(4N29(Short))

AC LINE / DIGITAL LOGIC ISOLATOR.
DIGITAL LOGIC/DIGITAL LOGIC ISOLATOR.
TELEPHONE LINE RECEIVER.
TWISTED PAIR LINE RECEIVER.
RELAY CONTACT MONITOR.

The TOSHIBA 4N29 (Short) through 4N33 (Short) consists arsenide infrared emitting diode coupled with a silicon photo darlington in a dula in-line package.


- Switching Time : 100 μ s Max.
- DC Current Transfer Ratio : 500%
- Isolation Resistance : 10¹¹ Ω Typ.
- Isolation Voltage : 2500Vrms Min.
- UL Recognized : UL1577, File No. E67349

Unit in mm

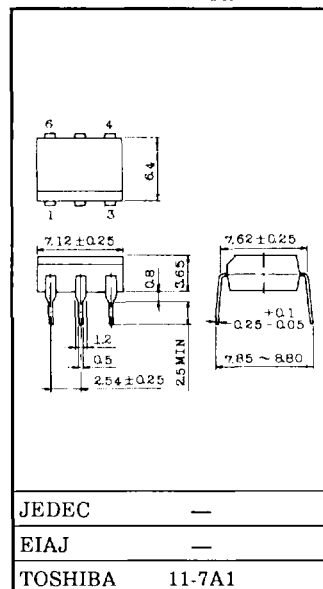

Weight : 0.4g

PIN CONFIGURATIONS (TOP VIEW)



- 1 : ANODE
- 2 : CATHODE
- 3 : NC
- 4 : EMITTER
- 5 : COLLECTOR
- 6 : BASE

4N29,29A,30,31,32,32A,33(Short)

(4N29(Short))

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current (Continuous)	I_F	80	mA
	Forward Current Derating	$\Delta I_F / ^\circ\text{C}$	1.07*	mA / °C
	Peak Forward Current (Note)	I_{PF}	3	A
	Power Dissipation	P_D	150	mW
	Power Dissipation Derating	$\Delta P_D / ^\circ\text{C}$	2.0*	mW / °C
	Reverse Voltage	V_R	3	V
DETECTOR	Collector-Emitter Voltage	V_{CEO}	30	V
	Collector-Base Voltage	V_{CBO}	30	V
	Emitter-Collector Voltage	V_{ECO}	5	V
	Collector Current (Continuous)	I_C	100	mA
	Power Dissipation	P_C	150	mW
	Power Dissipation Derating	$\Delta P_C / ^\circ\text{C}$	2.0*	mW / °C
COUPLED	Storage Temperature Range	T_{slg}	-55~150	°C
	Operating Temperature Range	T_{opr}	-55~100	°C
	Lead Soldering Temperature	T_{sold}	260	°C
	Total Package Power Dissipation	P_T	250	mW
	Total Package Power Dissipation Derating	$\Delta P_T / ^\circ\text{C}$	3.3*	mW / °C

Note : Pulse width 300 μ s, 2% duty cycle.

※ Above 25°C ambient.

4N29,29A,30,31,32,32A,33(Short)

(4N29(Short))







ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V_F	$I_F = 10\text{mA}$	—	1.15	1.5	V
	Reverse Current	I_R	$V_R = 3\text{V}$	—	—	100	μA
	Capacitance	C_D	$V = 0, f = 1\text{MHz}$	—	30	—	pF
DETECTOR	DC Forward Current Gain	h_{FE}	$V_{CE} = 5, I_C = 0.5\text{mA}$	—	10K	—	—
	Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}$	30	—	—	V
	Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}$	30	—	—	V
	Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	$I_E = 100\mu\text{A}$	5	—	—	V
	Collector Dark Current	I_{CEO}	$V_{CE} = 10\text{V}$	—	1.0	100	nA
	Collector Output Current	I_C	$I_F = 10\text{mA}, V_{CE} = 10\text{V}$	50 10 5	— — —	— — —	mA
COUPLED	Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_F = 8\text{mA}, I_C = 2\text{mA}$	— —	— —	1.0 1.2	V
	Turn-on Time	t_{on}		—	—	5	
	Turn-off Time	t_{off}	$I_F = 200\text{mA}, V_{CC} = 10\text{V}$ $I_C = 50\text{mA}$	—	—	40 100	μs
	Capacitance Input to Output	C_S	$V = 0, f = 1\text{MHz}$	—	0.8	—	pF
	Isolation Resistance	R_S	$V = 500\text{V}$	—	10^{11}	—	Ω
	Isolation Voltage	BV_S	AC, 1 Minute R. H. $\leq 60\%$	2500	—	—	Vrms
		BV_S^*	AC, Peak	2500 1500	— —	— —	Vpk
			AC, 1 second	1775	—	—	
							Vrms

* JEDEC registered minimum BV_S , however, Toshiba specifies a minimum BV_S of $2500V_{rms}$ 1 minute.

4N29,29A,30,31,32,32A,33(Short)

(4N29(Short))

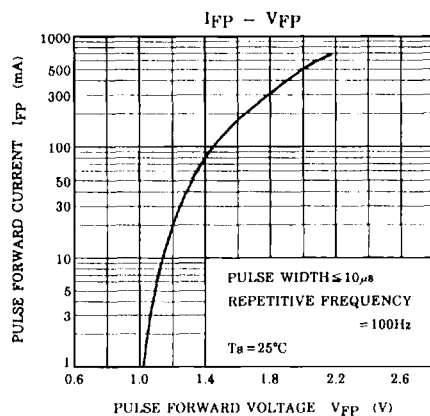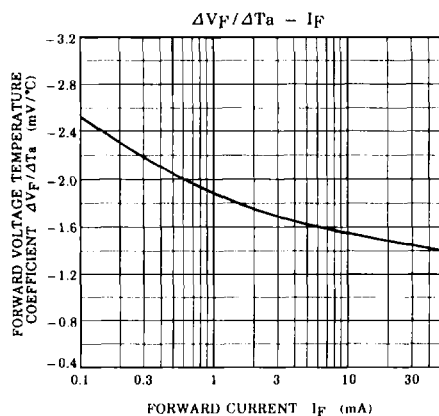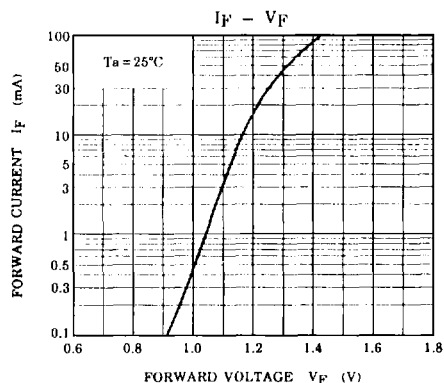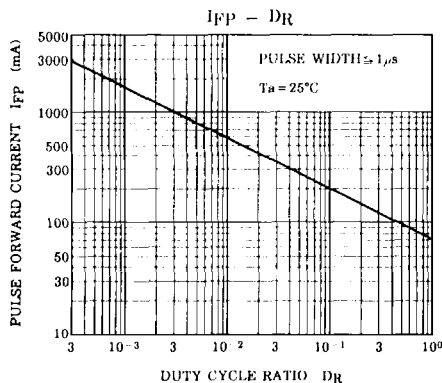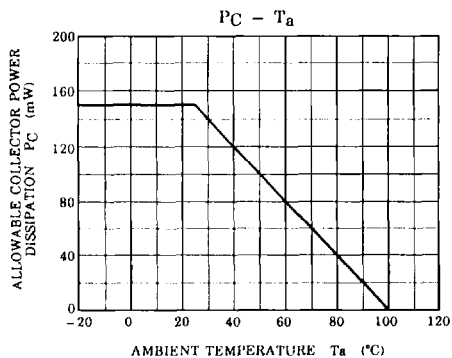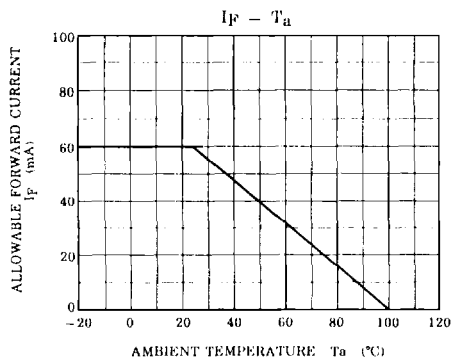

(4N29(Short))

