




PRODUCT NUMBER	"A" $\pm 0.25/.010$	"B" REF
70373-301-XX	3.5/.290	4.5 / .110
70373-302-XX	3 / .118	5.84/.230

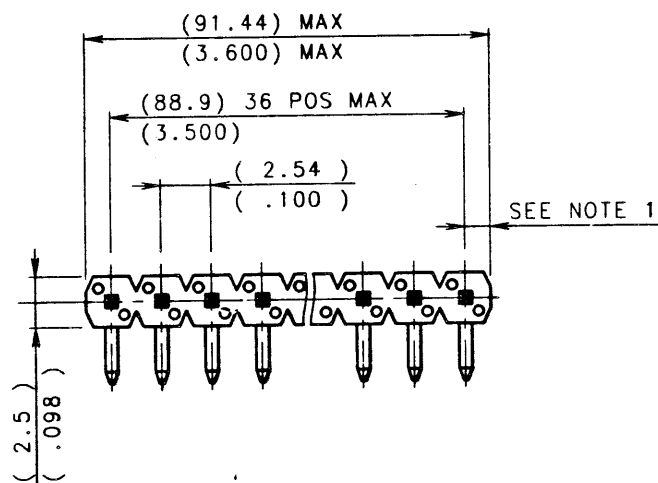



70373-XXX-XX

R INDICATES RETENTION HEADER
(SEE SHEET 2)

N° OF POSN.
VERSION
PLATING
BASIC P/N



RECOMMENDED HOLE PATTERN

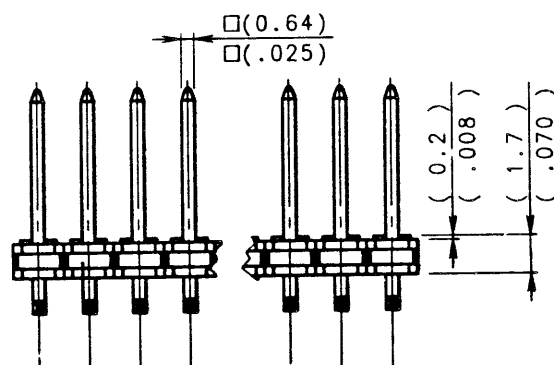

NOTES:

1. DIM 1.27⁺⁰_{-.08} FOR MOULDED SIDE(S)
ONLY IF SIDE(S) ARE BROKEN, DIM
1.02 MIN TO 1.7 MAS APPLIES.
2. MATERIAL PIN:
PHOSPHOR BRONZE A.S.T.M
B159 ALLOY C 51000 H0 3
3. MATERIAL BODY:
POLAMID, 30% GLASS FILLED
FLAME RETARDANT
PER U.L. 94 V-O COLOUR BLACK

70373-3XX-	4µm SnPb
PLATING CODE	MINIMUM PLATING THICKNESS OVER 1.27µm Ni



mat'l. code SEE P/N				tolerances unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
litr	ecn no	dr	date	linear		projection		title HEADER, RIGHT ANGLE, SR, LOW PROFILE	
				angles					
				dr	COMPAGNON JM 94.02.15	mm		product family	HEADER BSTIK
C	F40134	JMC	94.02.15	engr	PHAMVAN JM 94.02.15	scale	5:1	Size	213
B	F20204	JMC	92.03.27	chr	COMPAGNON JM 94.02.15			dog no	70373
A	11313	KWC	90.01.26	appd	JM P 94.02.15			sheet	1 of 2
sheet	revision	C							
index	sheet	1							

PDM: Rev: C



STATUS: Released

Printed: Aug-02-2002

3 PIN CONFIGURATION USED ON 4 TO 36 POSITIONS HEADER

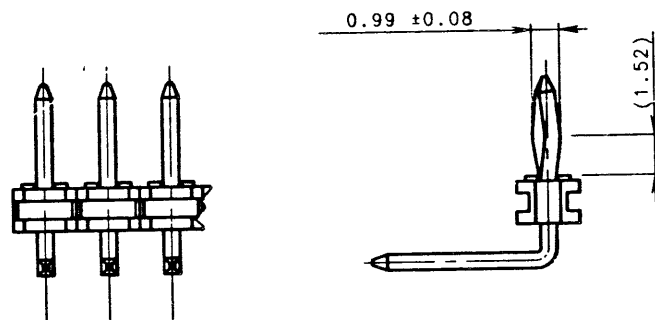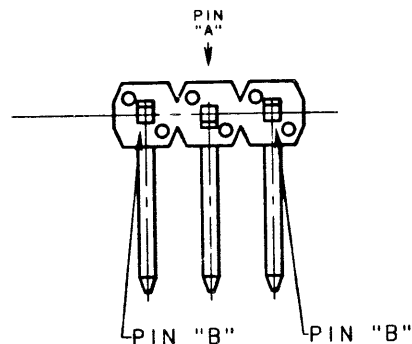

4 PIN CONFIGURATION USED ON 4 TO 36 POSITIONS HEADER

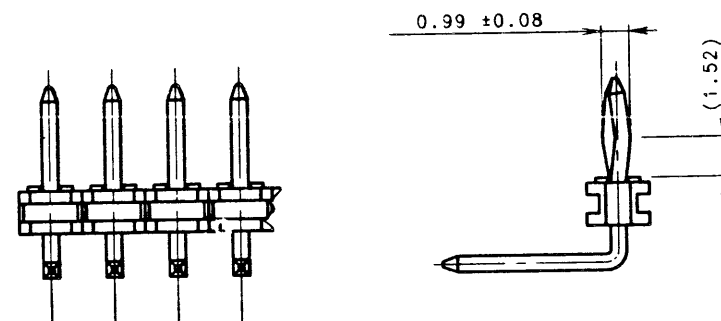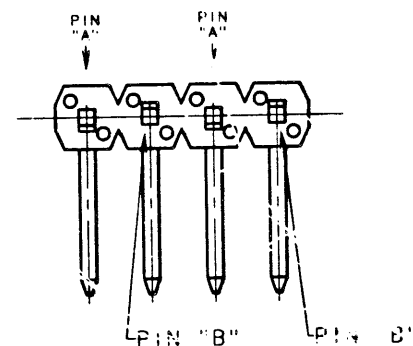

NOTES:

- 1 - PINS "A" AND "B" FOR RETENTION.
- 2 - DIRECTION OF RETENTION SHOWN BY ARROWS.
- 3 - ON 4 TO 36 POSITIONS, HEADER RETANTION IS IN MID POSITION OF HEADER.
- 4 - RETENTION IS AVAILABLE WHEN DIM "A" HAS A MIN OF 2.9 AND MAX OF 3.5mm.

mat'l. code SEE SHEET 1/2				tolerances unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
l/r	ecm no	dr	date	linear	_____	projection 	title HEADER, RIGHT ANGLE, SR, LOW PROFILE	product family HEADER BSTIK	code 213

				angles	_____		size deg no	70373	sheet 2 of 2
			dr	COMPAGNON JM 94.02.15					
			engr	PHAMVAN JM 94.02.15					
				chr	COMPAGNON JM 94.02.15	scale 5:1	A3		
			appd	JM P 94.02.15					
C	F40134	JMC	94.02.15						
sheet	revision	C							
index	sheet	1							

PDM: Rev: C

STATUS: Released

Printed: Aug. 02, 2002