



Small Signal Zener Diodes

Features

- Silicon planar Zener diodes.
- Standard Zener voltage tolerance is $\pm 5\%$. Other tolerances are available upon request.
- These diodes are also available in DO-35 case with the type designation 1N4681 to 1N4717 and SOD-123 case with the type designation MMSZ4681-V to MMSZ4717-V
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC



RoHS
COMPLIANT



18078

Mechanical Data

Case: SOT-23

Weight: approx. 8.8 mg

Terminals: solderable per MIL-STD-750, method 2026

Packaging codes/options:

GS18/10 k per 13" reel (8 mm tape), 10 k/box

GS08/3 k per 7" reel (8 mm tape), 15 k/box

Absolute Maximum Ratings

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Zener current (see table "Characteristics")				
Power dissipation		P_{tot}	350 ¹⁾	mW

Note

¹⁾ On FR - 5 board using recommended solder pad layout.

Thermal Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Thermal resistance junction to ambient air		R_{thJA}	420 ¹⁾	K/W
Maximum junction temperature		T_j	150	$^{\circ}\text{C}$
Storage temperature range		T_{stg}	- 55 to + 150	$^{\circ}\text{C}$

Note

¹⁾ On FR - 5 board using recommended solder pad layout.

MMBZ4681-V to MMBZ4717-V



Vishay Semiconductors

Electrical Characteristics

Maximum $V_F = 0.9$ V, at $I_F = 10$ mA

Part number	Marking code	Zener voltage ¹⁾			Max. reverse current	Reverse voltage	Max. voltage change
		V_Z at $I_{ZT} = 50$ μ A					
		V			μ A	V	V
		typ.	min.	max.			
MMBZ4681-V	CF	2.4	2.28	2.52	2	1	0.80
MMBZ4682-V	CH	2.7	2.57	2.84	1	1	0.85
MMBZ4683-V	CJ	3	2.85	3.15	0.8	1	0.90
MMBZ4684-V	CK	3.3	3.14	3.47	7.5	1.5	0.95
MMBZ4685-V	CM	3.6	3.42	3.78	7.5	2	0.95
MMBZ4686-V	CN	3.9	3.71	4.10	5	2	0.97
MMBZ4687-V	CP	4.3	4.09	4.52	4	2	0.99
MMBZ4688-V	CT	4.7	4.47	4.94	10	3	0.99
MMBZ4689-V	CU	5.1	4.85	5.36	10	3	0.97
MMBZ4690-V	CV	5.6	5.32	5.88	10	4	0.96
MMBZ4691-V	CA	6.2	5.89	6.51	10	5	0.95
MMBZ4692-V	CX	6.8	6.46	7.14	10	5.1	0.90
MMBZ4693-V	CY	7.5	7.13	7.88	10	5.7	0.75
MMBZ4694-V	CZ	8.2	7.79	8.61	1	6.2	0.5
MMBZ4695-V	DC	8.7	8.27	9.14	1	6.6	0.1
MMBZ4696-V	DD	9.1	8.65	9.56	1	6.9	0.08
MMBZ4697-V	DE	10	9.50	10.5	1	7.6	0.1
MMBZ4698-V	DF	11	10.50	11.6	0.05	8.4	0.11
MMBZ4699-V	DH	12	11.40	12.6	0.05	9.1	0.12
MMBZ4700-V	DJ	13	12.40	13.7	0.05	9.8	0.13
MMBZ4701-V	DK	14	13.30	14.7	0.05	10.6	0.14
MMBZ4702-V	DM	15	14.30	15.8	0.05	11.4	0.15
MMBZ4703-V	DN	16	15.20	16.8	0.05	12.1	0.16
MMBZ4704-V	DP	17	16.20	17.9	0.05	12.9	0.17
MMBZ4705-V	DT	18	17.10	18.9	0.05	13.6	0.18
MMBZ4706-V	DU	19	18.10	20	0.05	14.4	0.19
MMBZ4707-V	DV	20	19.00	21	0.01	15.2	0.2
MMBZ4708-V	DA	22	20.90	23.1	0.01	16.7	0.22
MMBZ4709-V	DZ	24	22.80	25.2	0.01	18.2	0.24
MMBZ4710-V	DY	25	23.80	26.3	0.01	19	0.25
MMBZ4711-V	EA	27	25.70	28.4	0.01	20.4	0.27
MMBZ4712-V	EC	28	26.60	29.4	0.01	21.2	0.28
MMBZ4713-V	ED	30	28.50	31.5	0.01	22.8	0.3
MMBZ4714-V	EE	33	31.40	34.7	0.01	25	0.33
MMBZ4715-V	EF	36	34.20	37.8	0.01	27.3	0.36
MMBZ4716-V	EH	39	37.10	41	0.01	29.6	0.39
MMBZ4717-V	EJ	43	40.90	45.2	0.01	32.6	0.43

Notes

¹⁾ Tested with pulse test current

²⁾ Maximum voltage change (V_Z). Voltage change is equal to the difference between V_Z at 100 μ A and V_Z at 10 μ A.

Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

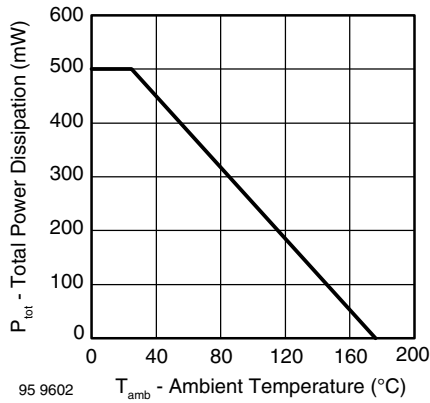


Figure 1. Total Power Dissipation vs. Ambient Temperature

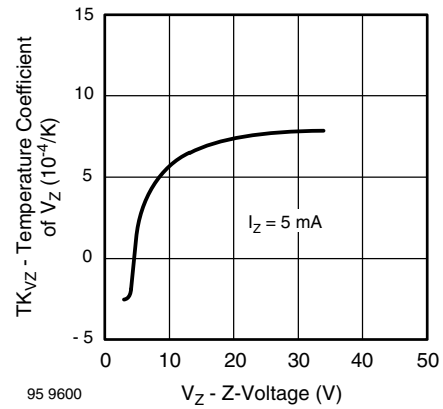


Figure 4. Temperature Coefficient of V_Z vs. Z-Voltage

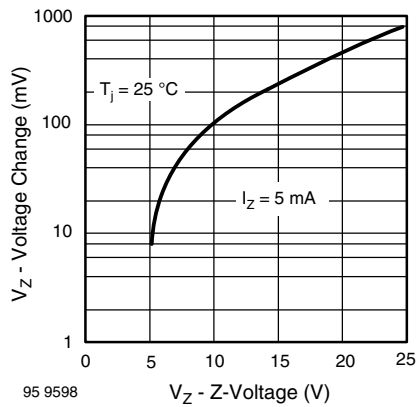


Figure 2. Typical Change of Working Voltage under Operating Conditions at $T_{amb} = 25\text{ }^{\circ}\text{C}$

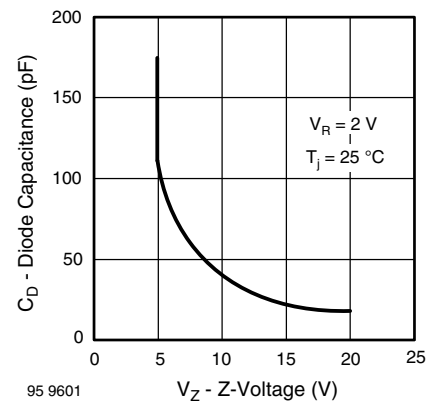


Figure 5. Diode Capacitance vs. Z-Voltage

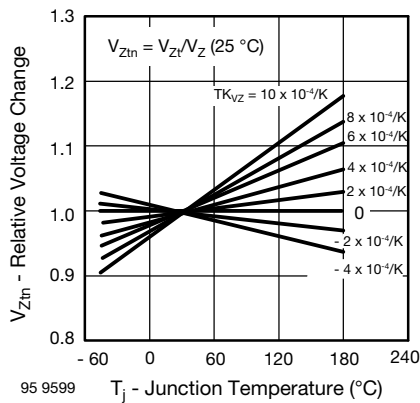


Figure 3. Typical Change of Working Voltage vs. Junction Temperature

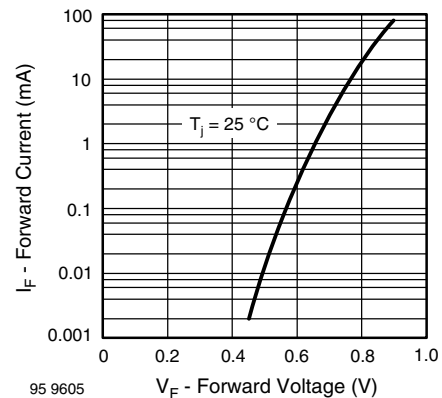


Figure 6. Forward Current vs. Forward Voltage

MMBZ4681-V to MMBZ4717-V



Vishay Semiconductors

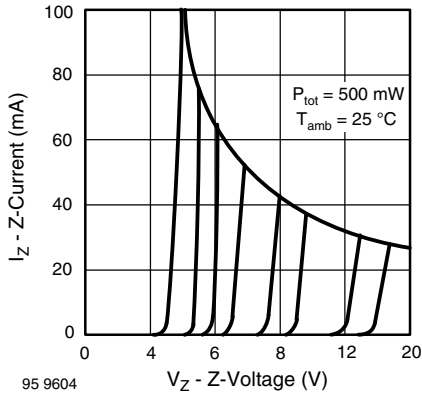


Figure 7. Z-Current vs. Z-Voltage

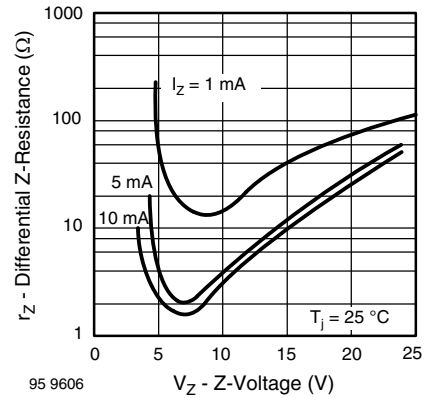


Figure 9. Differential Z-Resistance vs. Z-Voltage

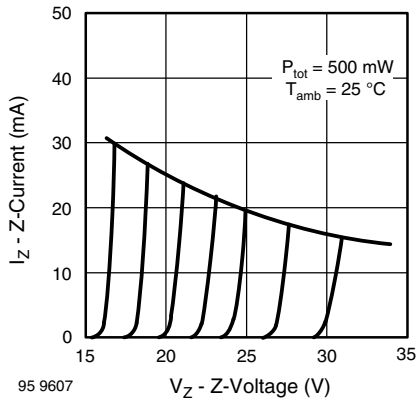


Figure 8. Z-Current vs. Z-Voltage





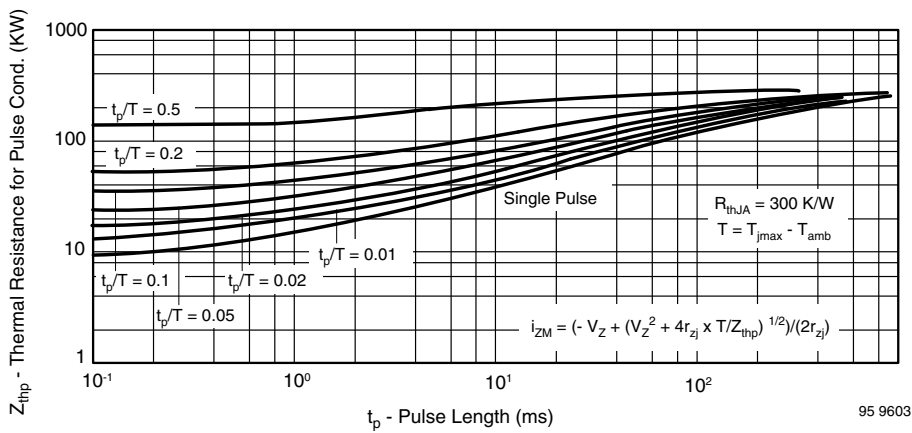


Figure 10. Thermal Response

Package Dimensions in millimeters (inches): SOT-23

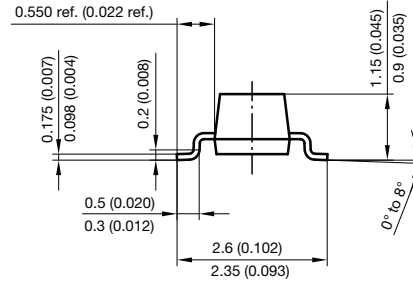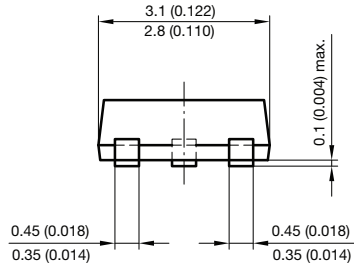

Foot print recommendation:



Document no.: 6.541-5014.01-4
Rev. 8 - Date: 23.Sept.2009
17418



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.