

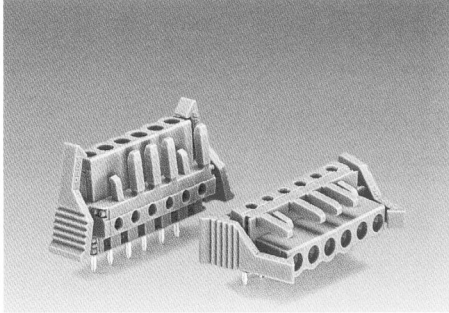


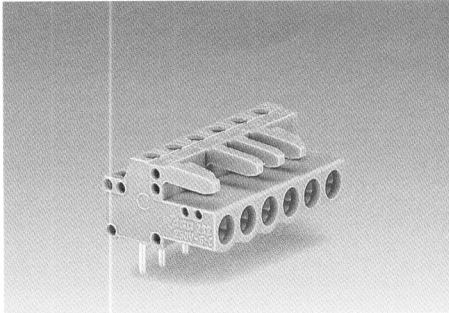



4

Female Connectors with Solder Pins,
Pin Spacing 5 mm / 0.197 in, Grey


Pin spacing 5 mm/0.197 in, grey Straight solder pin 250 V/4 kV/3 300 V, 15 A  12 A 300 V, 15 A 	Pin spacing 5 mm/0.197 in, grey Right angle solder pin 250 V/4 kV/3 300 V, 15 A  12 A 300 V, 15 A 	Female connectors with solder pins and locking device
Mating direction perpendicular to PCB *            	Mating direction parallel to PCB *            	

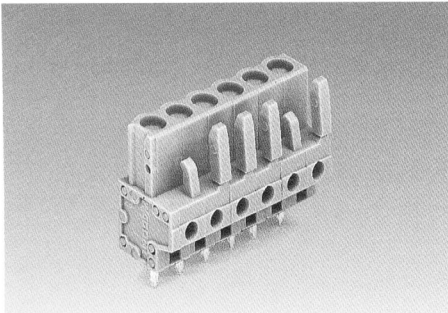

No. of poles	Item-No.	No. of poles	Item-No.	Additional item-No. for ...
Female connectors with straight solder pins, with coding fingers, with two latches, grey, solder pin 0.6 mm x 1 mm		Female connectors with right angle solder pins, with coding fingers, with two latches, grey, solder pin 0.6 mm x 1 mm		... Female connectors with straight or right angle solder pins and locking device
2 (one latch only)	232-132	2 (one latch only)	232-232	.../039-000
3 (one latch only)	232-133	3 (one latch only)	232-233	
4	232-134	4	232-234	
5	232-135	5	232-235	
:	:	:	:	
:	:	:	:	
12	232-142	12	232-242	
:	:	:	:	
:	:	:	:	
21	232-151	21	232-251	
22	232-152	22	232-252	Ordering example: Female connector with right angle solder pins and locking device, pin spacing 5 mm/0.197 in, grey 6-pole 232-236/039-000
23	232-153	23	232-253	
24	232-154	24	232-254	

Accessories			
	Test plug, w. cable 500 mm/1'7.7" 2 mm/0.079 in Ø, red 210-136 2.3 mm/0.091 in Ø, yel. 210-137		Test plug, w. cable 500 mm/1'7.7" 2 mm/0.079 in Ø, red 210-136 2.3 mm/0.091 in Ø, yel. 210-137
	Marker strips, self-adhesive 1-12 (40 x) 249-150/210-218 13-24 (40 x) 249-150/210-219		Marker strips, self-adhesive 1-12 (40 x) 249-150/210-218 13-24 (40 x) 249-150/210-219



Dimensions (in mm)	Diameter of drilled hole: 1.3^{+0.1}mm
---------------------------	---

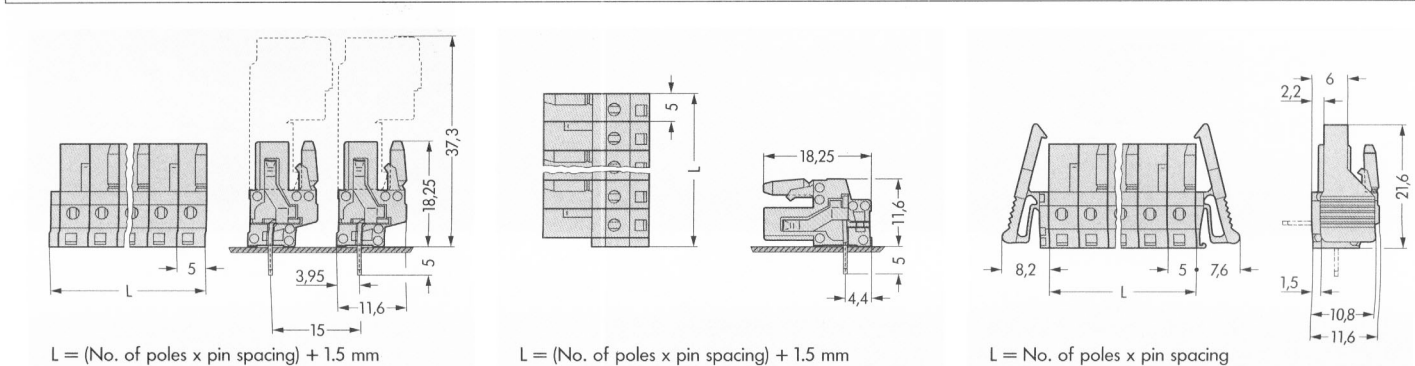

* For further approvals with corresponding ratings see pages 10.3 ff.

Female connectors with solder pins and short fixing flanges for feedthrough applications

Female connectors with solder pins and spacers for flush-mounting

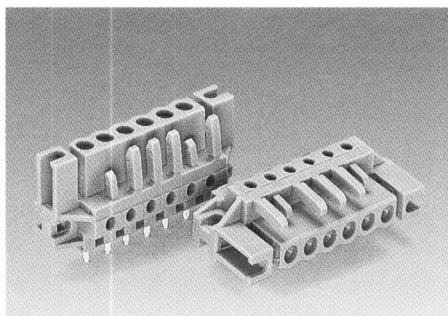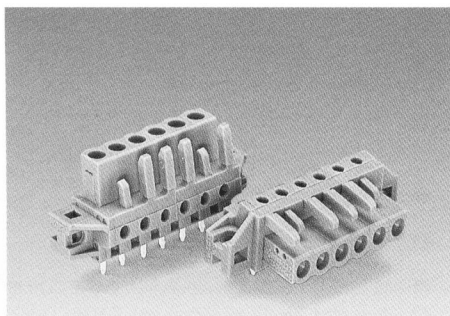

Additional item-No. for ...

... Female connectors with straight or right angle solder pins and **fixing flanges** for feedthrough applications

.../031-000

Ordering example:

Female connector with straight solder pins and fixing flanges for feedthrough applications, pin spacing 5 mm/0.197 in, grey 6-pole

232-136/031-000

Additional item-No. for ...


... Female connectors with straight or right angle solder pins and **spacers** for flush-mounting

.../047-000

Ordering example:

Female connector with right angle solder pins and spacers for flush-mounting, pin spacing 5 mm/0.197 in, grey 6-pole

232-236/047-000

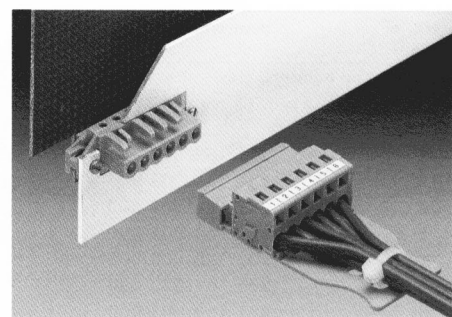


The innovative design of the flanges allows fixing on standard surfaces as well as in various feedthrough applications.

According to the application and style of flange the female connector can now be used as a panel feedthrough connector ...



Test plug, w. cable 500 mm/1'7.7"
2 mm/0.079 in Ø, red **210-136**
2.3 mm/0.091 in Ø, yel. **210-137**




Marker strips, self-adhesive
1-12 (40 x) **249-150/210-218**
13-24 (40 x) **249-150/210-219**



Test plug, w. cable 500 mm/1'7.7"
2 mm/0.079 in Ø, red **210-136**
2.3 mm/0.091 in Ø, yel. **210-137**



Marker strips, self-adhesive
1-12 (40 x) **249-150/210-218**
13-24 (40 x) **249-150/210-219**

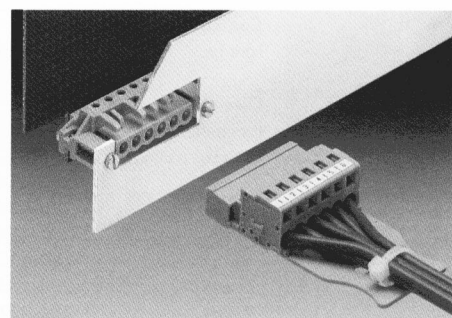

... or can be flush-mounted with the front plate.

$L_1 = L + 3 \text{ mm}$ $L_2 = L + 8.8 \text{ mm}$ $L_3 = L + 14.8 \text{ mm}$

