






- Color : Ⓡ : Red
Ⓢ : White
Ⓨ : Yellow
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute



JR010133




COLOR	MODEL NO	MODEL NO
Ⓡ	JR010133RN	JR010134RN
Ⓢ	JR010133WG	JR010134WG
Ⓨ	JR010133YN	JR010134YN





JR010136




COLOR	MODEL NO	MODEL NO
Ⓡ	JR010135RN	JR010136RN
Ⓢ	JR010135WG	JR010136WG
Ⓨ	JR010135YN	JR010136YN





JR010137




COLOR	MODEL NO	MODEL NO
Ⓡ	JR010137RG	JR010138RG
Ⓢ	JR010137WN	JR010138WN
Ⓨ	JR010137YN	JR010138YN





JR010140




COLOR	MODEL NO	MODEL NO
Ⓡ	JR010139RN	JR010140RN
Ⓢ	JR010139WG	JR010140WG
Ⓨ	JR010139YN	JR010140YN



J7010042



COLOR	MODEL NO
Ⓡ	J7010042RG
Ⓢ	J7010042WN
Ⓨ	J7010042YG






JK010053



JK010055



JK020050





JK020093




JK020114

- Color : (R) Red
(W) White
(Y) Yellow
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute



JK010053




COLOR	MODEL NO
(R)	JK010053RG
(W)	JK010053WG
(Y)	JK010053YG





JK010055




COLOR	MODEL NO
(R)	JK010055RG
(W)	JK010055WG
(Y)	JK010055YG





JK020050




COLOR	MODEL NO
(R-W)	JK0200500N





JK020093



COLOR	MODEL NO
(W), (R)	JK0200930N



JK020114



COLOR	MODEL NO
(W), (R)	JK0201140N





JK020090




JK040091



JK060092



JK020095





JK040096





JK060097

- Color : (R) Red
(W) White
(Y) Yellow


- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute

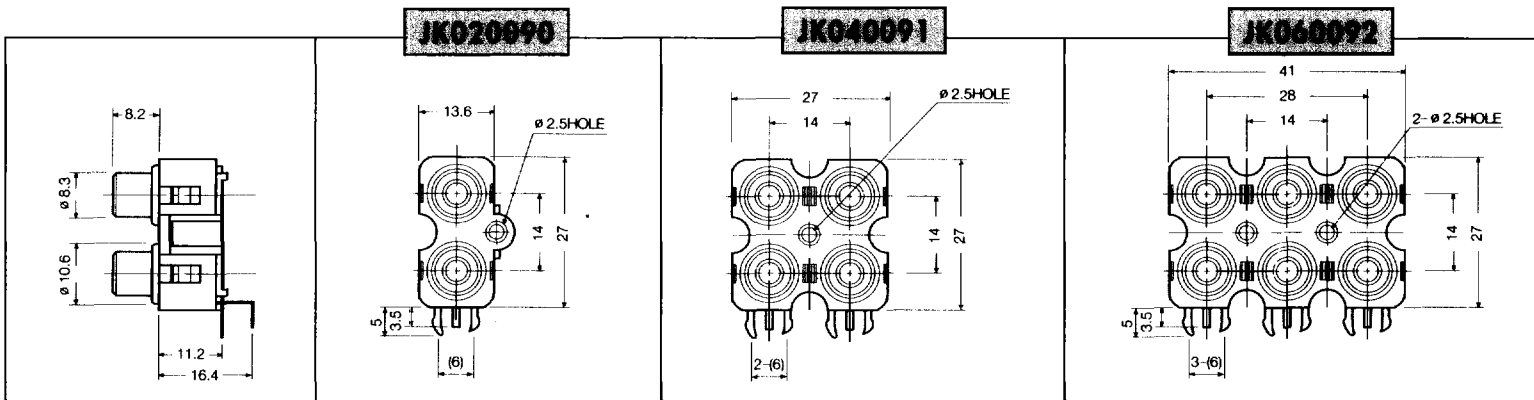



COLOR	MODEL NO	COLOR	MODEL NO	COLOR	MODEL NO
(W) (R)	JK0200900N	(W) (W) (R) (R)	JK0400910N	(W) (W) (W) (R) (R) (R)	JK0600920N

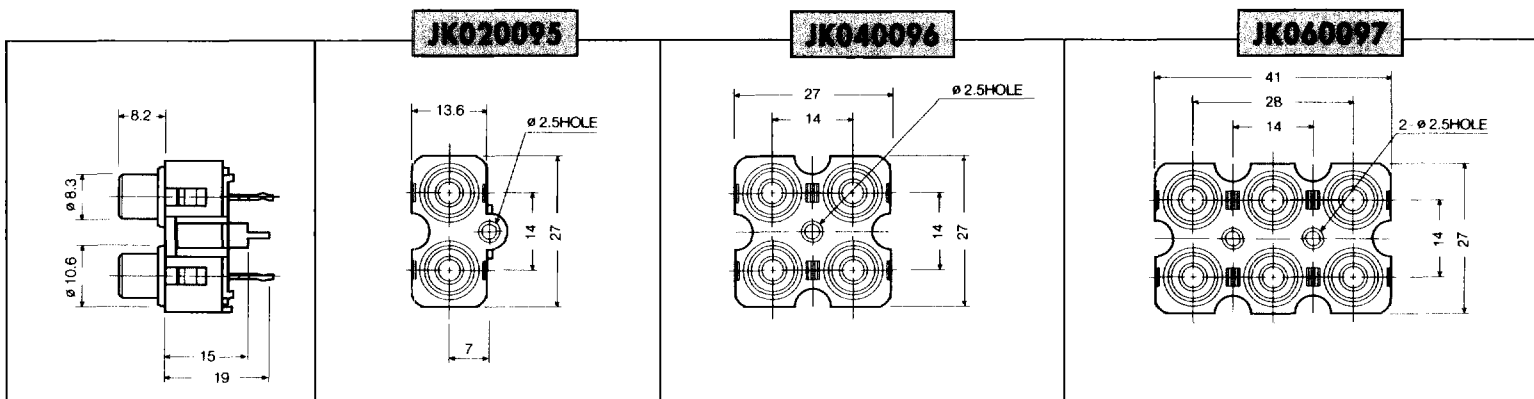

COLOR	MODEL NO	COLOR	MODEL NO	COLOR	MODEL NO
(W) (R)	JK0200950N	(W) (W) (R) (R)	JK0400960N	(W) (W) (W) (R) (R) (R)	JK0600970N

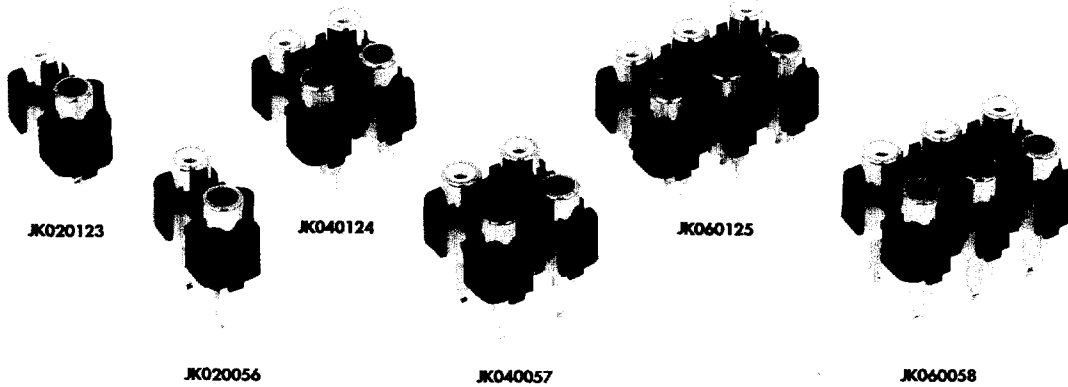


- Color : Red
 White
 Yellow
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute

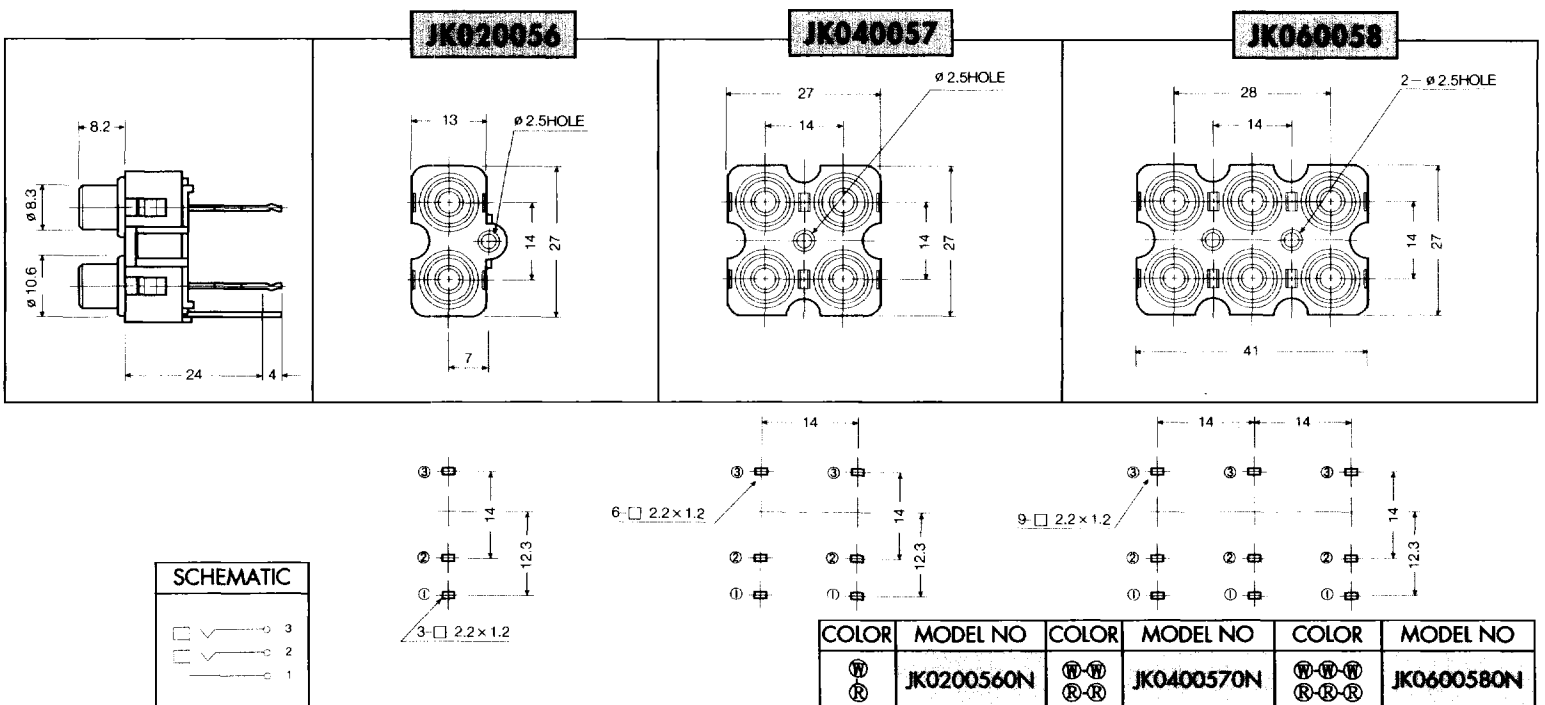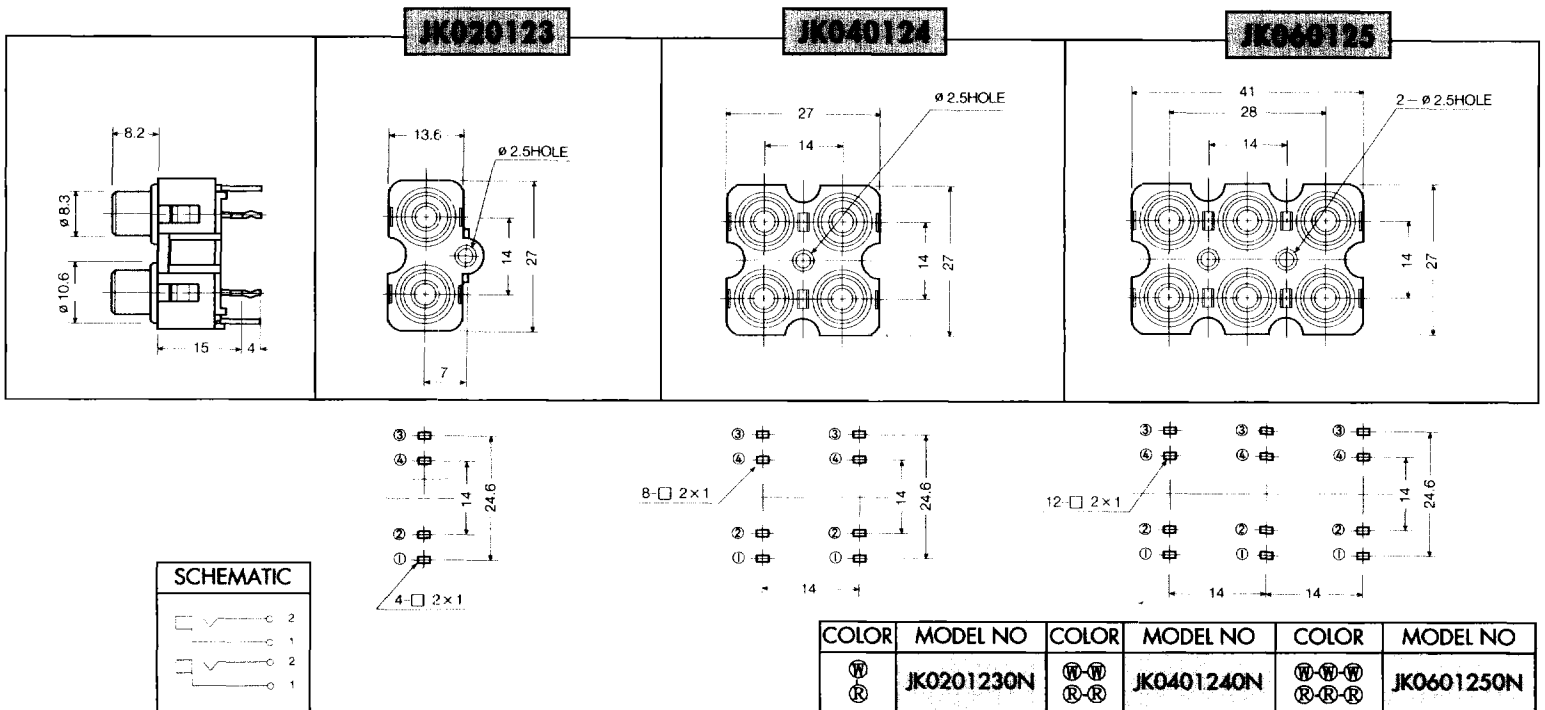





JK020130




JK040131



JK060132








JK030008






JK090122

- Color : (R) Red
(W) White
(Y) Yellow
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute

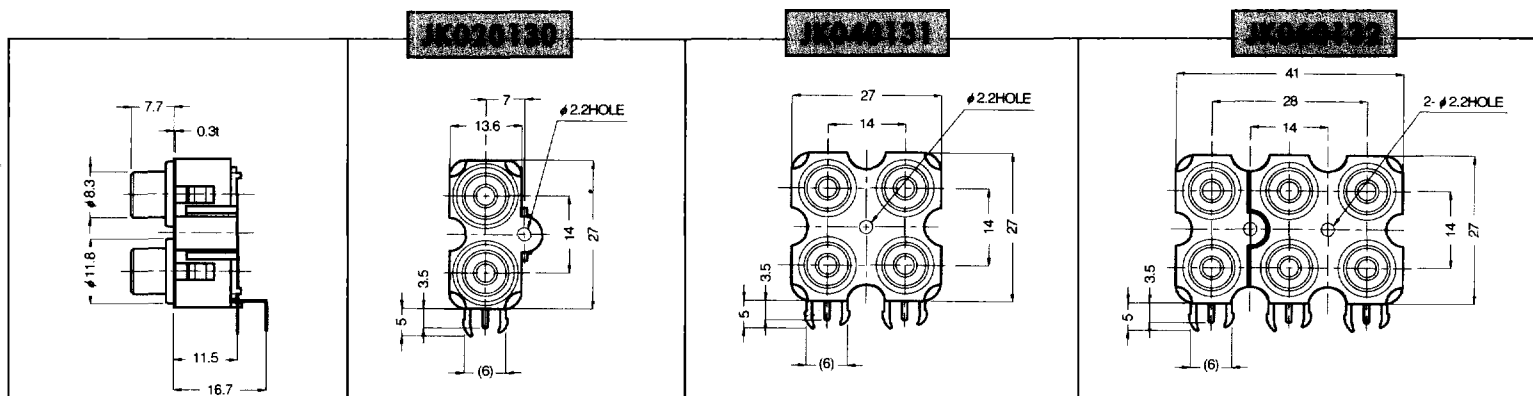




COLOR	MODEL NO	COLOR	MODEL NO	COLOR	MODEL NO
(W) (R)	JK0201300N	(W) (R) (R)	JK0401310N	(W) (W) (W) (R) (R) (R)	JK0601320N

JK030008



COLOR	MODEL NO
(R) (W) (Y)	JK0300080N


JK090122

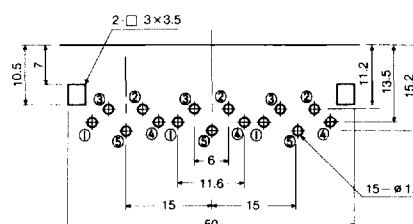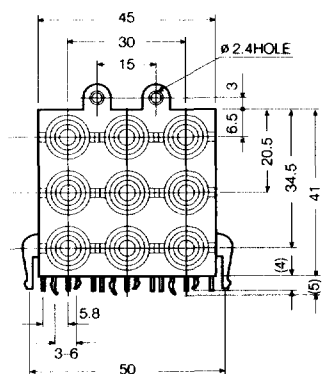



SCHEMATIC		SCHEMATIC
"A" TYPE		"B" TYPE
		
STYLE	COLOR	MODEL NO
"A" TYPE	Y-Y-Y R-R-R R-R-R	JK0901211N
"B" TYPE	Y-R-R Y-R-R Y-R-R	JK0901220N




- Color : (R) Red
(W) White
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute

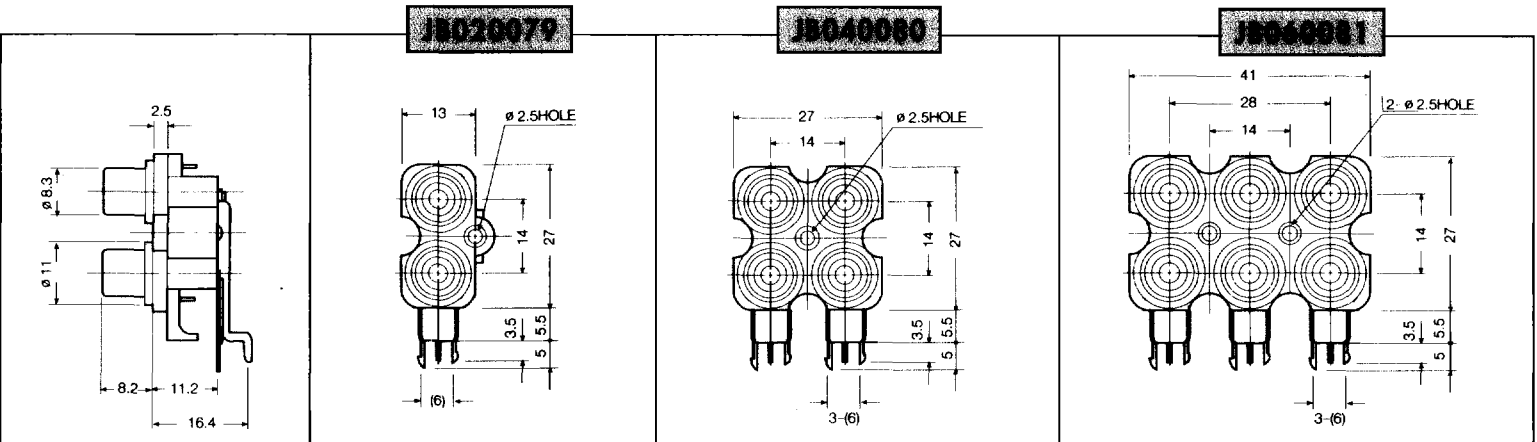




SCHEMATIC




COLOR	MODEL NO	COLOR	MODEL NO	COLOR	MODEL NO
(W)	JB0200790N	(W-W)	JB0400800N	(W-W-W)	JB0600810N
(R)		(R-R)		(R-R-R)	

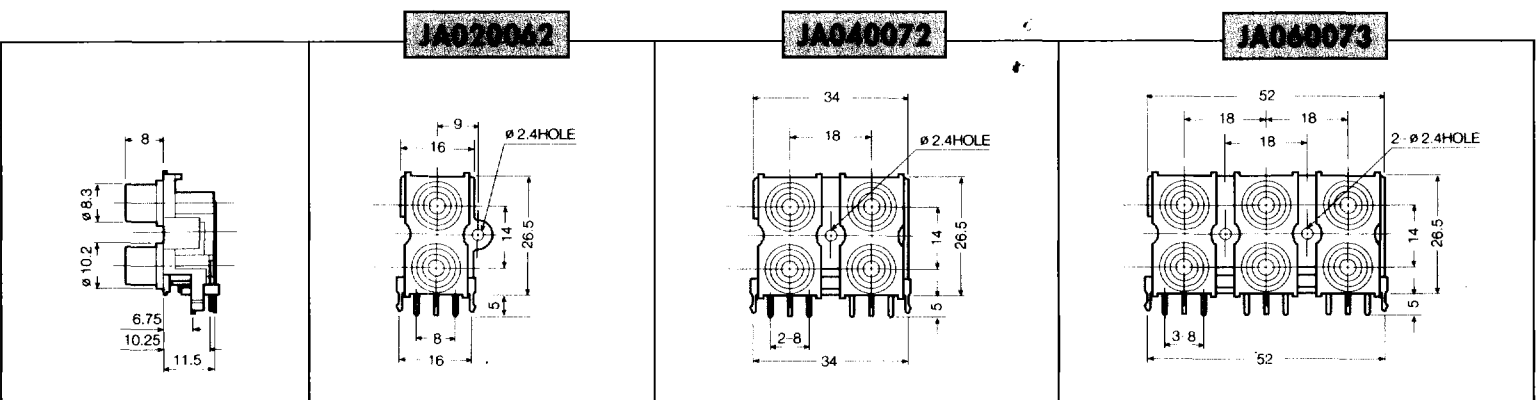

SCHEMATIC




COLOR	MODEL NO	COLOR	MODEL NO	COLOR	MODEL NO
(W)	JA0200620N	(W-W)	JA0400720N	(W-W-W)	JA0600730N
(R)		(R-R)		(R-R-R)	

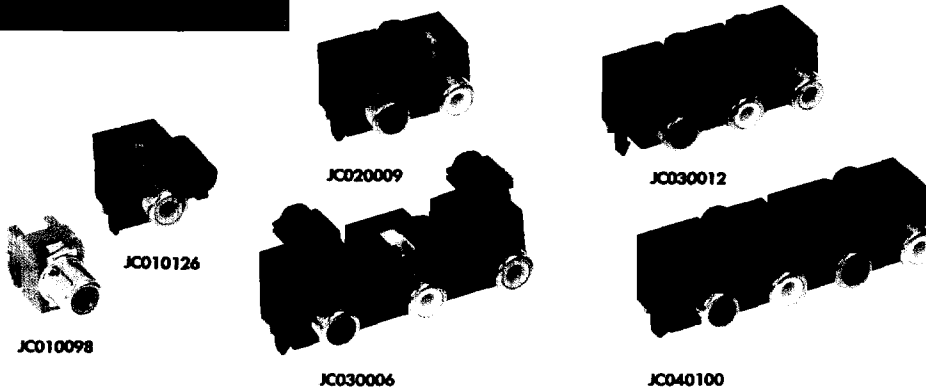


- Color : Red
 White
 Yellow
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute


JC010098

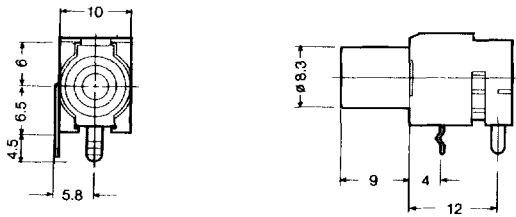


COLOR	MODEL NO	MODEL NO
	JC010098RN	JC010099RN
	JC010098WG	JC010099WG
	JC010098YN	JC010099YN




JC010126

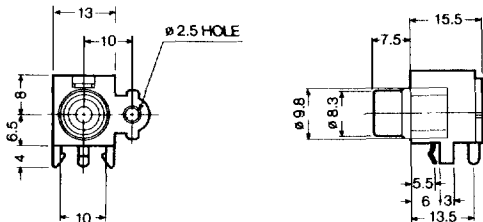






COLOR	MODEL NO	MODEL NO
	JC010126RN	JC010128RN
	JC010126WG	JC010128WG
	JC010126YN	JC010128YN



JC030006

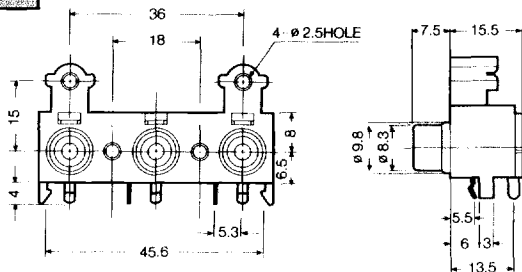

COLOR	MODEL NO	MODEL NO
	JC0300060N	JC0300070N

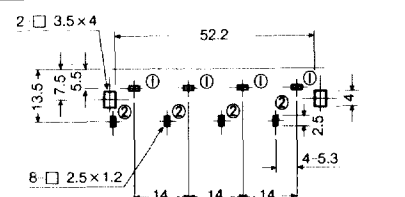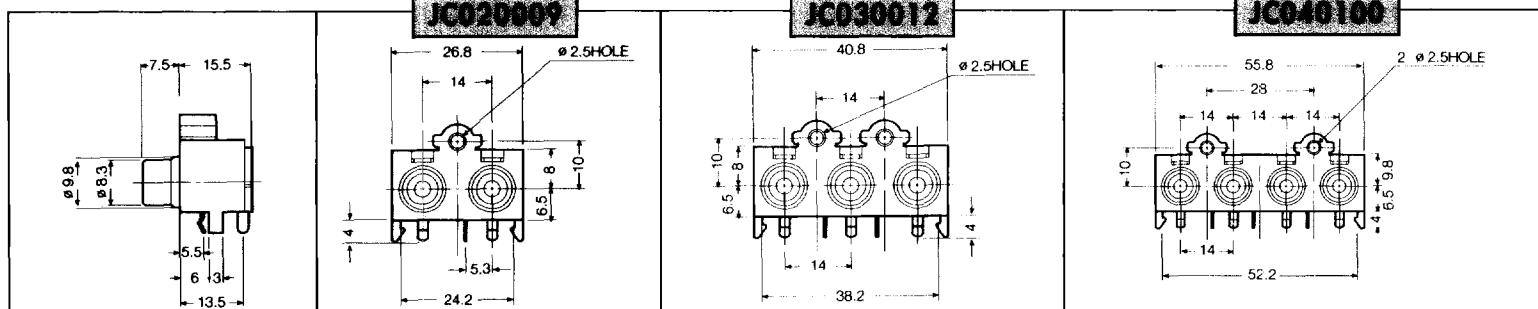


SCHEMATIC	SCHEMATIC
"A" TYPE	"B" TYPE

STYLE	COLOR	MODEL NO	COLOR	MODEL NO	COLOR	MODEL NO
"A" TYPE		JC0200090N		JC0300120N		JC0401000N
"B" TYPE		JC0200100N		JC0300130		JC0401010N



J4020028



J4040032



J4060034



J4020047





J4040048



J4060049

- Color : (R) Red
(W) White
(Y) Yellow
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute

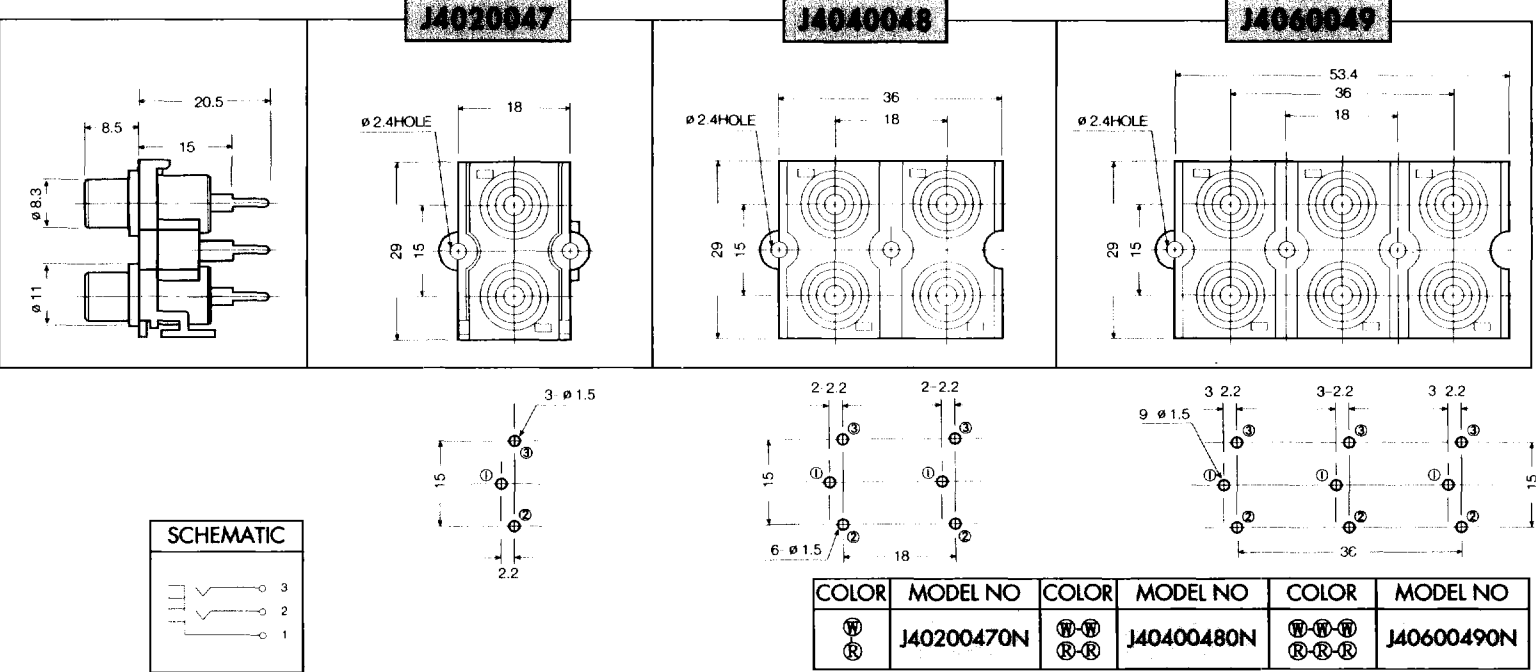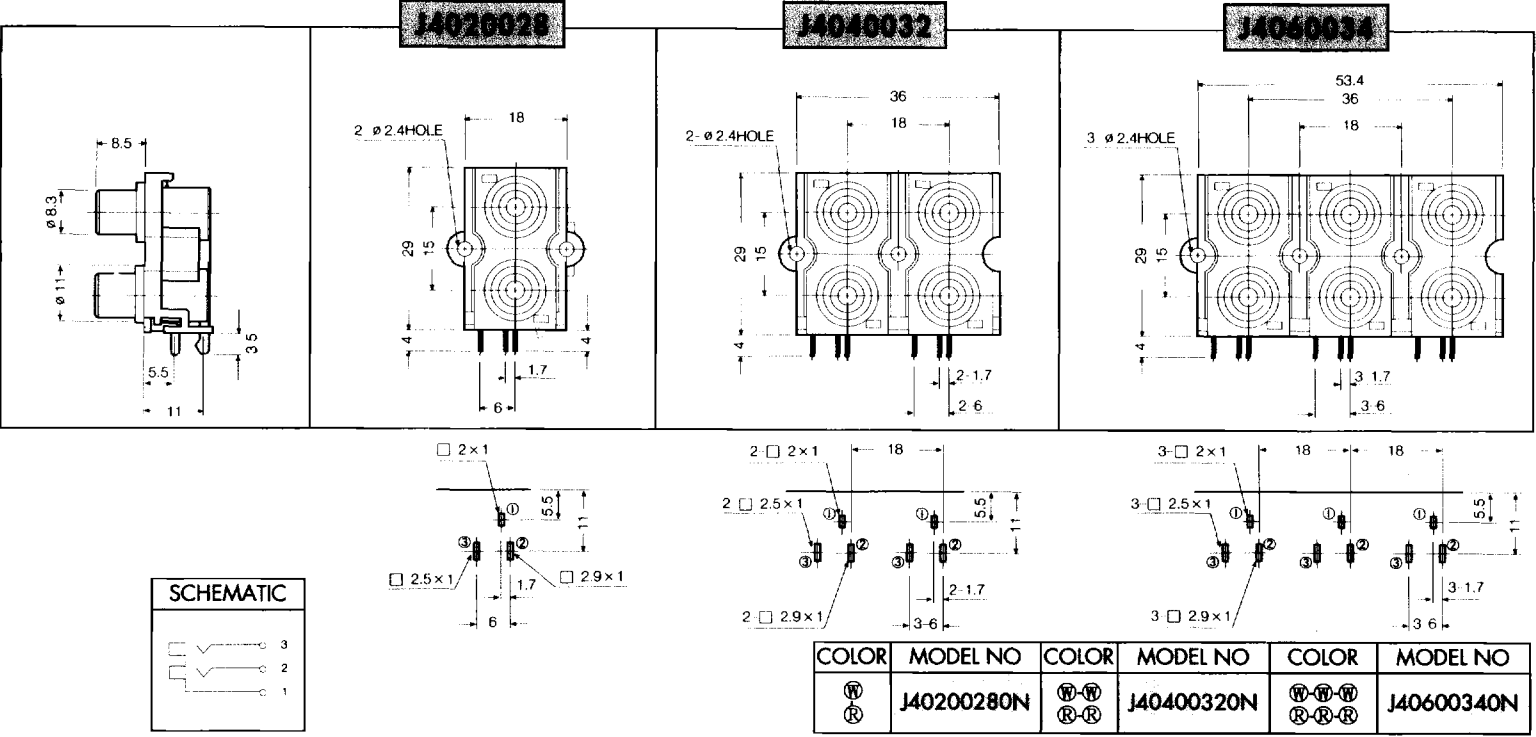




JF030160



JF100157





JF040161

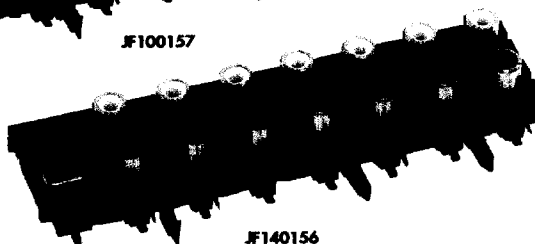


JF140156

- Color : (R) : Red
(W) : White
(Y) : Yellow
- Contact Resistance : 30m Ω max
- Insulation Resistance : 100M Ω min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute



JF030160

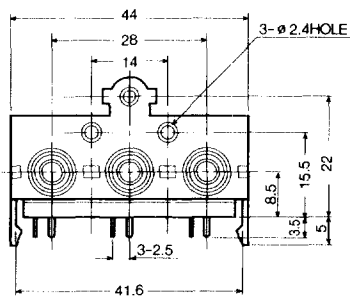


COLOR	MODEL NO
ⓇⓂⓎ	JF0301600N
	





JF040161






COLOR	MODEL NO
	JF0401610N
	



IF 100157

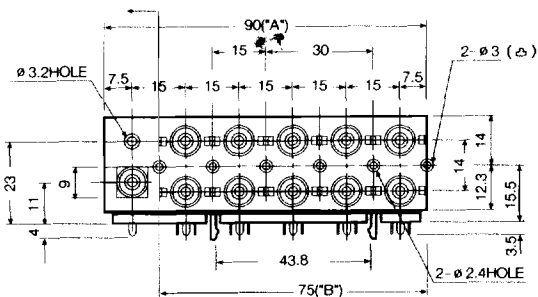

REF ID: A6134

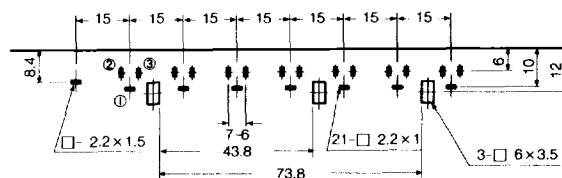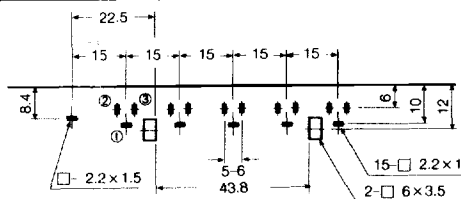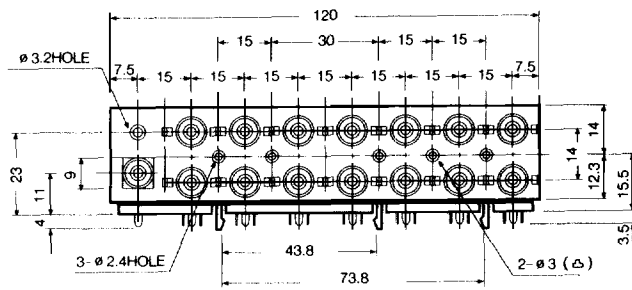

SCHEMATIC	STYLE	COLOR	MODEL NO	COLOR	MODEL NO
	"A" TYPE		JF1001570N		JF1401560N
	"B" TYPE		JF1001580N		



JE020059



JE040060







JE030039






JH040017

- Color : (R) : Red
(W) : White
(Y) : Yellow
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute

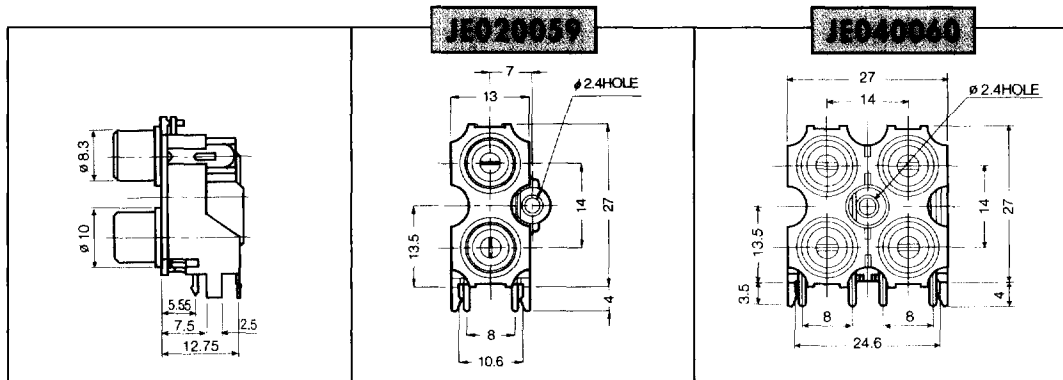




COLOR	MODEL NO	COLOR	MODEL NO
(W) (R)	JE0200590N	(W) (R)	JE0400600N

JE030039

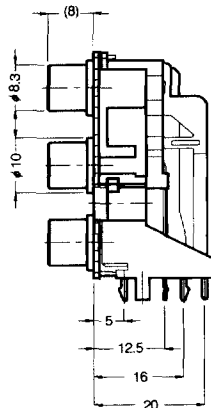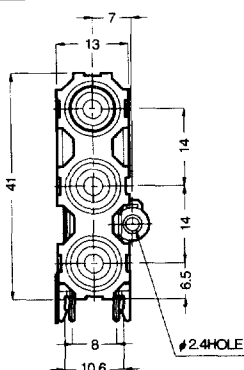

COLOR	MODEL NO
(Y) (W) (R)	JE0300390N

JH040017

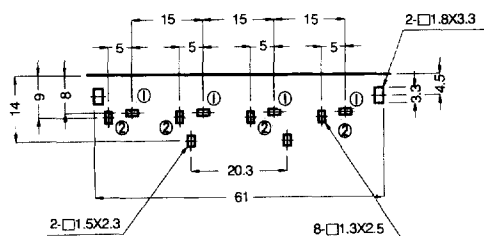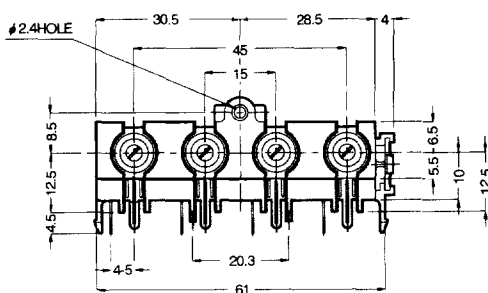


COLOR	MODEL NO
(R) (W) (R) (W)	JH0400170N




J1020029



J1020051



J1040033







J1040040







J1020036

- Color : (R) : Red
(W) : White
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute



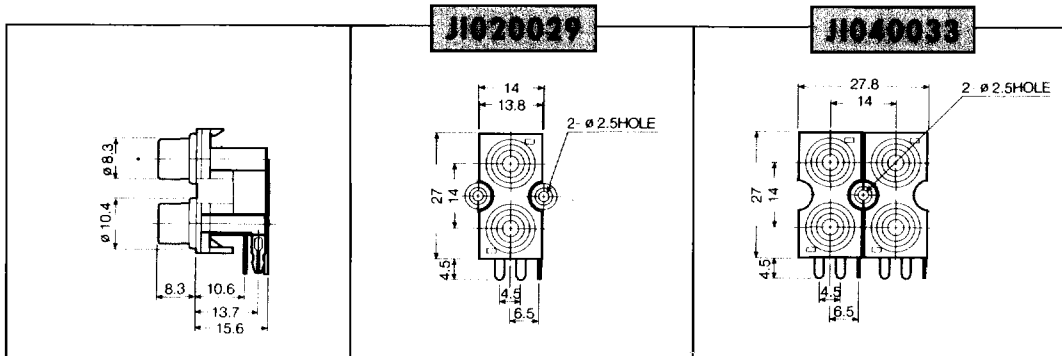


COLOR	MODEL NO	COLOR	MODEL NO
(W) (R)	J10200290N	(W) (W) (R) (R)	J10400330N

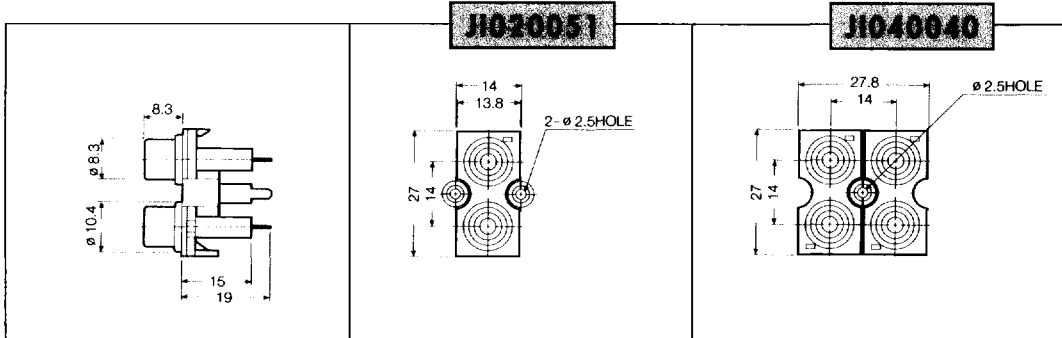

COLOR	MODEL NO	COLOR	MODEL NO
(W) (R)	J10200510N	(W) (W) (R) (R)	J10400400N

J1020036



COLOR	MODEL NO
(W) (R)	J10200360N




JD010103



JD020105



JD040108





JD060110




JD020151

- Color : (R) : Red
(W) : White
(Y) : Yellow
- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute



JD010103




COLOR	MODEL NO	MODEL NO
(R)	JD010103RN	JD010102RN
(W)	JD010103WN	JD010102WN
(Y)	JD010103YN	JD010102YN



JD020151










COLOR	MODEL NO
(W) (R)	JD0201510N



JD020105


JD040108

JD060110

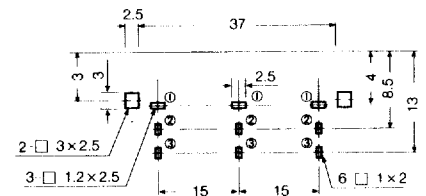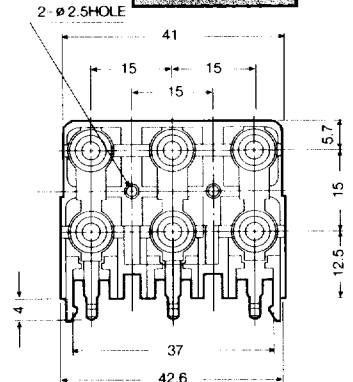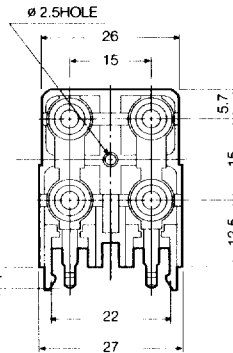

"A" TYPE	"B" TYPE

STYLE	COLOR	MODEL NO	COLOR	MODEL NO	COLOR	MODEL NO
"A" TYPE	(W) (R)	JD0201050N	(W) (R) (R)	JD0401080N	(W) (W) (W) (R) (R) (R)	JD0601100N
"B" TYPE	(W) (R)	JD0201040N	(W) (R) (R)	JD0401090N	(W) (W) (W) (R) (R) (R)	JD0601110N

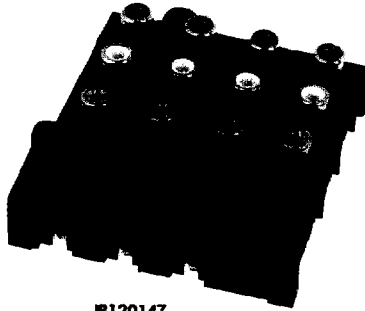

JR120147






- Color : (R) : Red
(W) : White
(Y) : Yellow

- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min, at 500V DC
- Insulation Withstand Voltage : AC 500V for one minute

- (S) S-DONNECTOR

- Contact Resistance : 30mΩ max
- Insulation Resistance : 50MΩ min, at 250V DC
- Insulation Withstand Voltage : AC 250V for one minute

JR120147

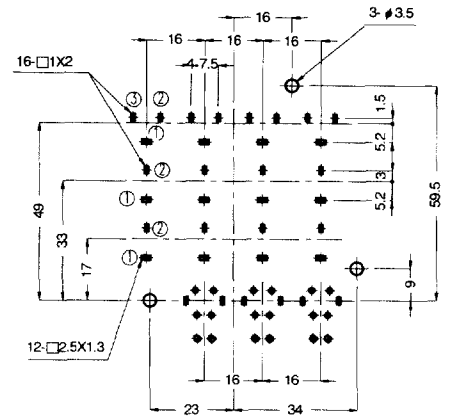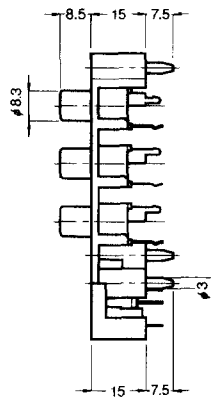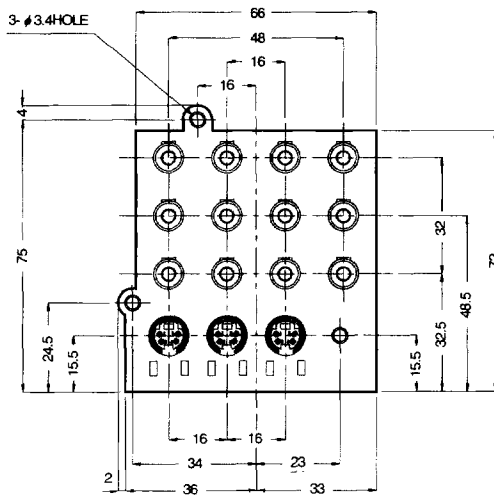

SCHEMATIC	
PIN JACK	S-CONNECTOR




COLOR	MODEL NO
(R)(R)(R)(R) (W)(W)(W)(W) (Y)(Y)(Y)(Y) (S)(S)(S)	JR1201470N

S-CONNECTOR



C4016026

- Contact Resistance : 30mΩ max
- Insulation Resistance : 50mΩ min, at 250V DC
- Insulation Withstand Voltage : AC 250V for one minute



SCHEMATIC	
	MODEL NO
	C40160260N